la Reale
INSTALLATION SITE
PREPARATION CHECKLIST

GAGGIA MILANO

Model	STANDARD Version	
	☐ 2 Groups	☐ 3 Groups
Dimensions (WxHxD)	34.8" x 21.8" x 29.5"	44.5" x 21.8" x 29.5"
Weight	215 lb	262 lb
Power Cord Plug	NEMA 6-50P	NEMA 6-50P
Max Absorbed Power	7200 W	8500 W
Voltage & Frequency	220 V / 60 Hz	

GENERAL MACHINE ENVIRONMENT

- ☐ The installation area is clean and clear of dust and tools. It is not located in an active construction zone.
- ☐ The counter accommodates the machine size and weight (refer to model table).
- ☐ An access hole has been pre-drilled in the counter for drainage and power in accordance with model installation template.
- ☐ Hole in counter is fitted with a collar to protect electrical cord, water line & drain tube.
- ☐ Machine can safely be installed with a minimum clearance of 3" from the back wall, 4" on each side and 12" on top.

ELECTRICAL REQUIREMENTS

- ☐ Power outlet receptacle is NEMA 6-50R.
- ☐ Dedicated electrical circuit meets La Reale model power requirements.
- ☐ No extension cord or power strip on the circuit.

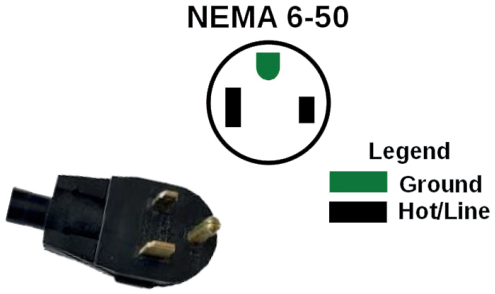

WATER REQUIREMENTS

Pressure & Hardness

- ☐ Pressure does not exceed 72.5 PSI.
- ☐ pH range is between 6.5 and 7.5.
- ☐ Hardness (TDS) is between 89 PPM and 142 PPM.

MANDATORY – Machine water line must be equipped with a water filtration system with softness/filtration capabilities and a descaling device.

Water Network

- ☐ The water network provides cold, drinkable tap water.
- ☐ Dedicated 3/8" diameter water line.
- ☐ Shutoff valve with a 3/8" G male pipe fitting on machine's end.

HIGHLY RECOMMENDED – Connection to a floor drain in accordance with local health code.