

SERVICE & INSTALLATION MANUAL

Encore 29



NSF/ANSI 4



Images may vary from the actual product.

Manufactured by:
Cafection Ventures Inc.
2355, avenue Dalton, Québec (Québec) G1P 3S3 Canada
Tel.: 800-561-6162 Fax: 800-463-2739
service@cafection.evocagroup.com www.cafection.com

EN1805INSA - Revision 4

TABLE OF CONTENTS

1 SAFETY INSTRUCTIONS 5

1.1 Food-Contact Parts 5

1.2 Warnings..... 5

1.3 Power Supply 5

1.4 Disconnect the equipment if:..... 5

2 WARRANTY 6

2.1 Warranty Policy 6

2.2 Warranty Return Procedure..... 7

2.3 Shipping Liabilities..... 7

3 REFERENCE DRAWINGS 8

3.1 External View 8

3.2 Rear View 9

3.3 Internal View 10

3.4 Brew Group Assembly 11

3.5 Brewing Process..... 12

3.6 Hot Water Tank..... 13

3.7 Bean Hopper Installation 14

3.8 Water Temperature..... 15

4 INITIAL SETUP 16

4.1 On-Site Installation Requirements..... 16

 4.1.1 *Operating Environment* 16

 4.1.2 *Power Supply* 16

 4.1.3 *Water Supply*..... 16

 4.1.4 *Tools Required*..... 16

 4.1.5 *Clearance*..... 16

4.2 Brewer Specifications..... 17

 4.2.1 *Hopper & Canister Capacities*..... 17

 4.2.2 *Water Tank* 17

 4.2.3 *Electrical Specifications (brewer consumption)*..... 17

4.3 Unpacking 18

4.4 Leveling the Equipment..... 19

4.5 Side Skirts Installation 19

4.6 Drip Tray Installation 19

4.7 Water Line Connection..... 20

4.8 Electrical Connection 21

4.9 Loading Products..... 22

 4.8.1 *Soluble Canisters*..... 22

 4.8.2 *Bean Hopper*..... 22

4.10 Filter Paper Installation 23

4.11 Chute Hole Hiding Plate Installation..... 24

4.12 Chute Kit Installation (Optional)..... 24

4.13 Installation Verification 25

4.14 Coin Changer and Bill Acceptor 25

5 User Interface 26

5.1 Selection Screen Interface..... 26

5.2 Carafe Mode 27

5.3 Iced Coffee 28

5.4 Selection Keyboard for People with Disabilities (Optional) 29

6	SERVICE MODE	30
6.1	Users Levels	30
6.2	Service Tab	31
6.3	Status Tab	33
6.4	Password Pop-Up	34
6.5	Recipes Tab	34
6.5.1	<i>Customization Sub Tab</i>	34
6.5.2	<i>Information Sub Tab</i>	35
6.5.3	<i>Liquids & Ingr. (Ingredients) Sub Tab</i>	36
6.5.4	<i>Brew Cycles & Fast Settings Sub Tab</i>	37
6.6	System Tab	39
6.6.1	<i>System 1 Sub Tab</i>	39
6.6.2	<i>System 2 Sub Tab</i>	41
6.6.3	<i>Tools Sub Tab</i>	43
6.6.4	<i>Network Sub Tab</i>	44
6.6.5	<i>Screen Saver Sub Tab</i>	48
6.6.6	<i>Admin Sub Tab</i>	49
6.7	Media Tab	51
6.7.1	<i>Current Playlist Sub Tab</i>	51
6.7.2	<i>Next Playlist Sub Tab</i>	51
6.7.3	<i>Video Storage Sub Tab</i>	52
6.8	Audit Tab	52
6.8.1	<i>Permanent Sales Count</i>	52
6.8.2	<i>Erasable Sales Count</i>	52
6.8.3	<i>Users Sales Count</i>	53
6.9	General Reset to Factory Settings	54
7	CLEANING AND SANITIZING	55
7.1	"Auto Rinse" Button	55
7.2	"Cleaning & Sanitizing" Button	55
7.3	Cleaning and Sanitizing Instructions	56
7.4	Recommended Cleaning Tools	57
7.5	Cleaning and Sanitizing Schedule	57
7.6	Overall Cleaning	58
7.7	Exterior Cleaning	58
7.7.1	<i>Touch Screen</i>	58
7.7.2	<i>Drip Tray</i>	58
7.7.3	<i>Waste Bin</i>	59
7.8	Interior Parts Cleaning & Sanitizing	60
7.8.1	<i>Bean Hopper</i>	60
7.8.2	<i>Bean Hopper Funnel</i>	61
7.8.3	<i>Coffee Chute</i>	61
7.8.4	<i>Soluble Canisters</i>	62
7.8.5	<i>Soluble Whipper Assembly</i>	62
7.8.6	<i>Brew Group</i>	63
7.8.7	<i>Fans</i>	64

8	PREVENTIVE MAINTENANCE	65
8.1	Preventive Maintenance (PM) Schedule	65
8.2	Recommended tools for servicing the coffee brewer	65
8.3	Overflow tray.....	66
8.4	Brew Group Assembly	67
8.5	Outlet Valves	68
8.6	Hot Water Tank	69
8.7	Grinder.....	70
9	PARTS MAINTENANCE.....	71
9.1	Hot Water Tank Draining.....	71
9.2	Shutdown and Storage	72
	9.2.1 Storing the Brew Group.....	72
9.3	Brew Group Assembly	73
9.4	Main Board & Computer	74
9.5	Flash Card Replacement.....	75
9.6	Grinder.....	76
	9.6.1 Grinder issue (grinder jam)	76
	9.6.2 Disassembling the coffee grinder	77
10	TROUBLESHOOTING.....	78
10.1	Warning Messages List	78
10.2	Error Messages List	79
ANNEX 1	WASTE CHUTE POSITION.....	80
ANNEX 2	REQUIRED CLEARANCE	81
ANNEX 3	MAIN BOARD	82
ANNEX 4	FULL MAINTENANCE SCHEDULE.....	84



This symbol is used to highlight a key step to anticipate a risk for safety or a risk of damaging the equipment.



This symbol is used to indicate additional information or a quick tip.



NSF provides the best brand protection through its public health mission and the most comprehensive solutions across the total supply chain. This is why NSF is The Most Trusted Name in Food Safety™.

It signifies to customers and regulators that your products have been tested by an independent third party, are certified to the industry's highest standards and meet all applicable North American regulatory requirements.

NSF food equipment standards include requirements for material safety, to ensure the product will not leach harmful chemicals into food; design and construction, to ensure the product is cleanable and is not likely to harbor bacteria; and product performance.

Source: www.nsf.org

1 SAFETY INSTRUCTIONS

Basic safety precautions should always be followed when using electrical appliances.
Read all instructions before using this brewing equipment.

1.1 Food-Contact Parts

Cafection recommends cleaning and sanitizing all parts in contact with food prior to installation and use.

1.2 Warnings

To minimize the risk of fire or electric shock, do not expose this equipment to rain or moisture. Do not immerse this equipment in water; it could lead to electric shock or other malfunctions. Do not use this equipment other than for its intended use. This equipment contains hot water. Never move it when full. This brewing equipment is intended for indoor use only.

1.3 Power Supply

Always use a grounded 120 VAC 60 Hz socket outlet rated for 15A service. Each brewing equipment must have its own electrical outlet, on a dedicated circuit. Extension cords must not be used. This brewer is equipped with a polarized alternating current line plug (one blade wider than the other). Only use this plug with an outlet in which the prongs can be fully inserted.

1.4 Disconnect the equipment if:

- Damage is done to the power cord.
- The equipment does not work properly.
- The temperature of the power cord or plug increases dramatically during use.
- Unusual conditions occur.
- Whenever a part has to be changed, plugged or unplugged.



**FAILURE TO COMPLY CAN CAUSE EQUIPMENT DAMAGE,
FIRE OR SERIOUS INJURIES.**



**THE "INITIAL SETUP" SECTION OF THIS MANUAL MUST BE COMPLETED
BEFORE PLUGGING IN THE BREWER.**

2 WARRANTY

2.1 Warranty Policy

Cafection hereby guarantees that the products it manufactured are, to the best of its knowledge, free from all defects and faulty workmanship. The following warranties and conditions are applicable:

- All parts in contact with water (outlet valves, heating element, temperature probe, level probes, reference probe, inlet valve and thermostat) are warranted against material defects for a period of 90 days from the date of shipment.
- All remaining parts of the brewer are warranted against material and workmanship defects for one (1) year from the date of shipment.

All warranted parts, services and returns must have prior authorization from Cafection. Please contact Cafection's Customer Service at 800-561-6162, ext. 310.

The following circumstances will void the warranty policy:

- Use of substitute parts not manufactured or approved by Cafection.
- Improper installation or operation of the equipment.
- Abuse or neglect, including (but not limited to) failure to follow the preventive maintenance schedule.
- Variation in equipment performance due to excessive mineral deposit or local water conditions.
- Equipment altered in any way and/or dates, codes or serial numbers removed or modified.
- Equipment damaged in shipment from the customer to Cafection due to improper packaging.

Please note that labor is not covered by the warranty and that the repair protocol is limited to replacing the defective part(s). Should any additional repairs need to be done, they will be charged to the customer.

Equipment or parts will not be accepted without a prior notification to Cafection.



2355, avenue Dalton, Québec (Québec) G1P 3S3
Tel.: 800-561-6162 - Fax: 800-463-2739
service@caflection.evocagroup.com

Customer Service Business Hours (EST):
Monday to Thursday: 8 am to 8 pm
Friday: 8 am to 5 pm

2.2 Warranty Return Procedure

In order to always offer better, faster service, Cafection requests your cooperation for the return of parts under warranty. Cafection thanks you in advance for taking the time to follow this procedure:

1. Contact the Customer Service Department to obtain a Return Merchandise Authorization (RMA) number.
2. Send a copy of the original invoice to Cafection by fax at 800-463-2739 or by email at service@caflection.evocagroup.com for approval.
3. No parts must be destroyed before receiving a written confirmation from Cafection about credit or exchange possibilities.
4. Keep a copy of the original invoice for your records. A copy of the original invoice **must be included** with your parts return.

Cafection will not be held responsible for any loss or damage occurring during transport.



MAKE SURE THE MERCHANDISE IS WELL PACKED!
Please use original packaging.

Upon receipt, Cafection will check the merchandise and authorize the repair or replacement by identical or equivalent parts if warranty is applicable. Only warranted parts are authorized for return. Cafection suggests keeping replacement parts on hand.

The warranty covers regular shipping only. Overnight shipping charges will be applied to your order when required. Orders must be received before noon (12:00 pm EST) to be shipped the same day*.



All returned parts showing no sign of malfunctioning will be subject to administrative and test fees of \$35, plus freight charges associated with the return. A part returned in unacceptable condition will also be subject to this \$35 fee and its warranty may be refused.

**Some conditions may apply.*

2.3 Shipping Liabilities

YOU ARE RESPONSIBLE, SHIPMENT MUST BE INSPECTED!

You can refuse delivery if a shipment is damaged. Do not sign the shipment without proper inspection. Should you choose to accept the delivery, it is mandatory that you record any significant information on the delivery slip. Remember that you take responsibility of the merchandise once you have signed the delivery receipt.

You have 24 hours to report and file a claim for concealed damages to the transportation company.




Failure to comply with this procedure could lead to a claim refusal by the carrier.


FOR MORE INFORMATION, PLEASE CALL CUSTOMER SERVICE AT 800-561-6162, ext. 310.

3 REFERENCE DRAWINGS


3.1 External View

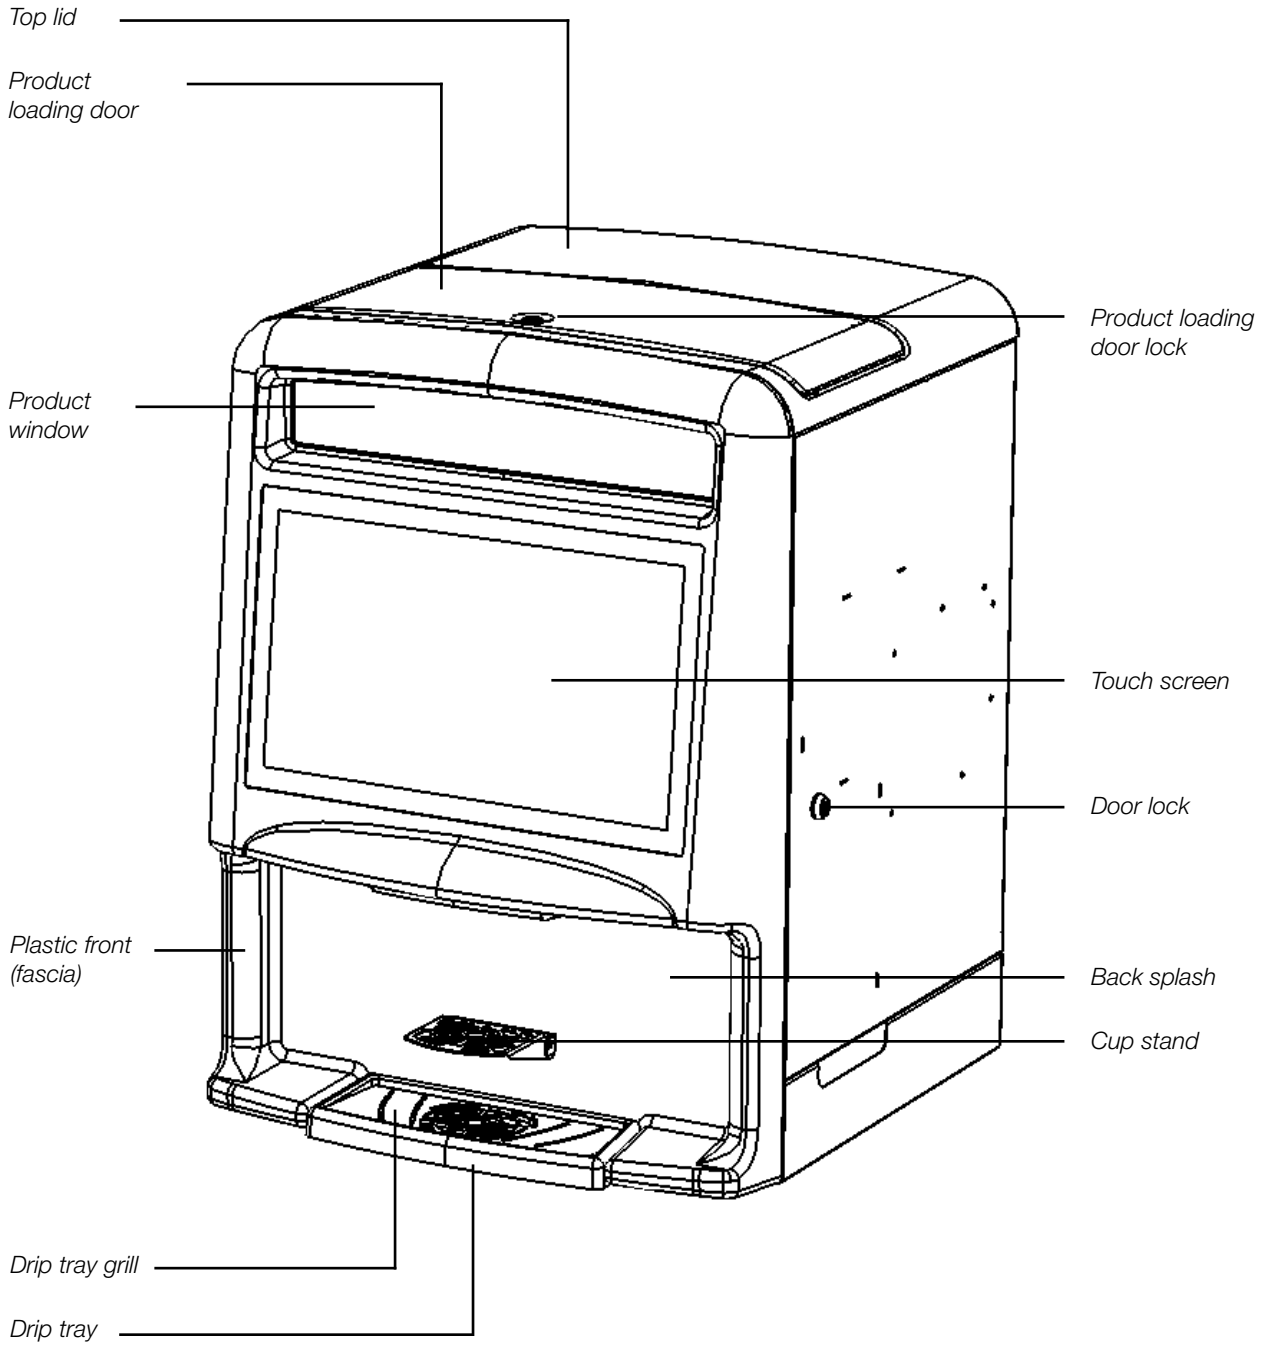


3.2 Rear View

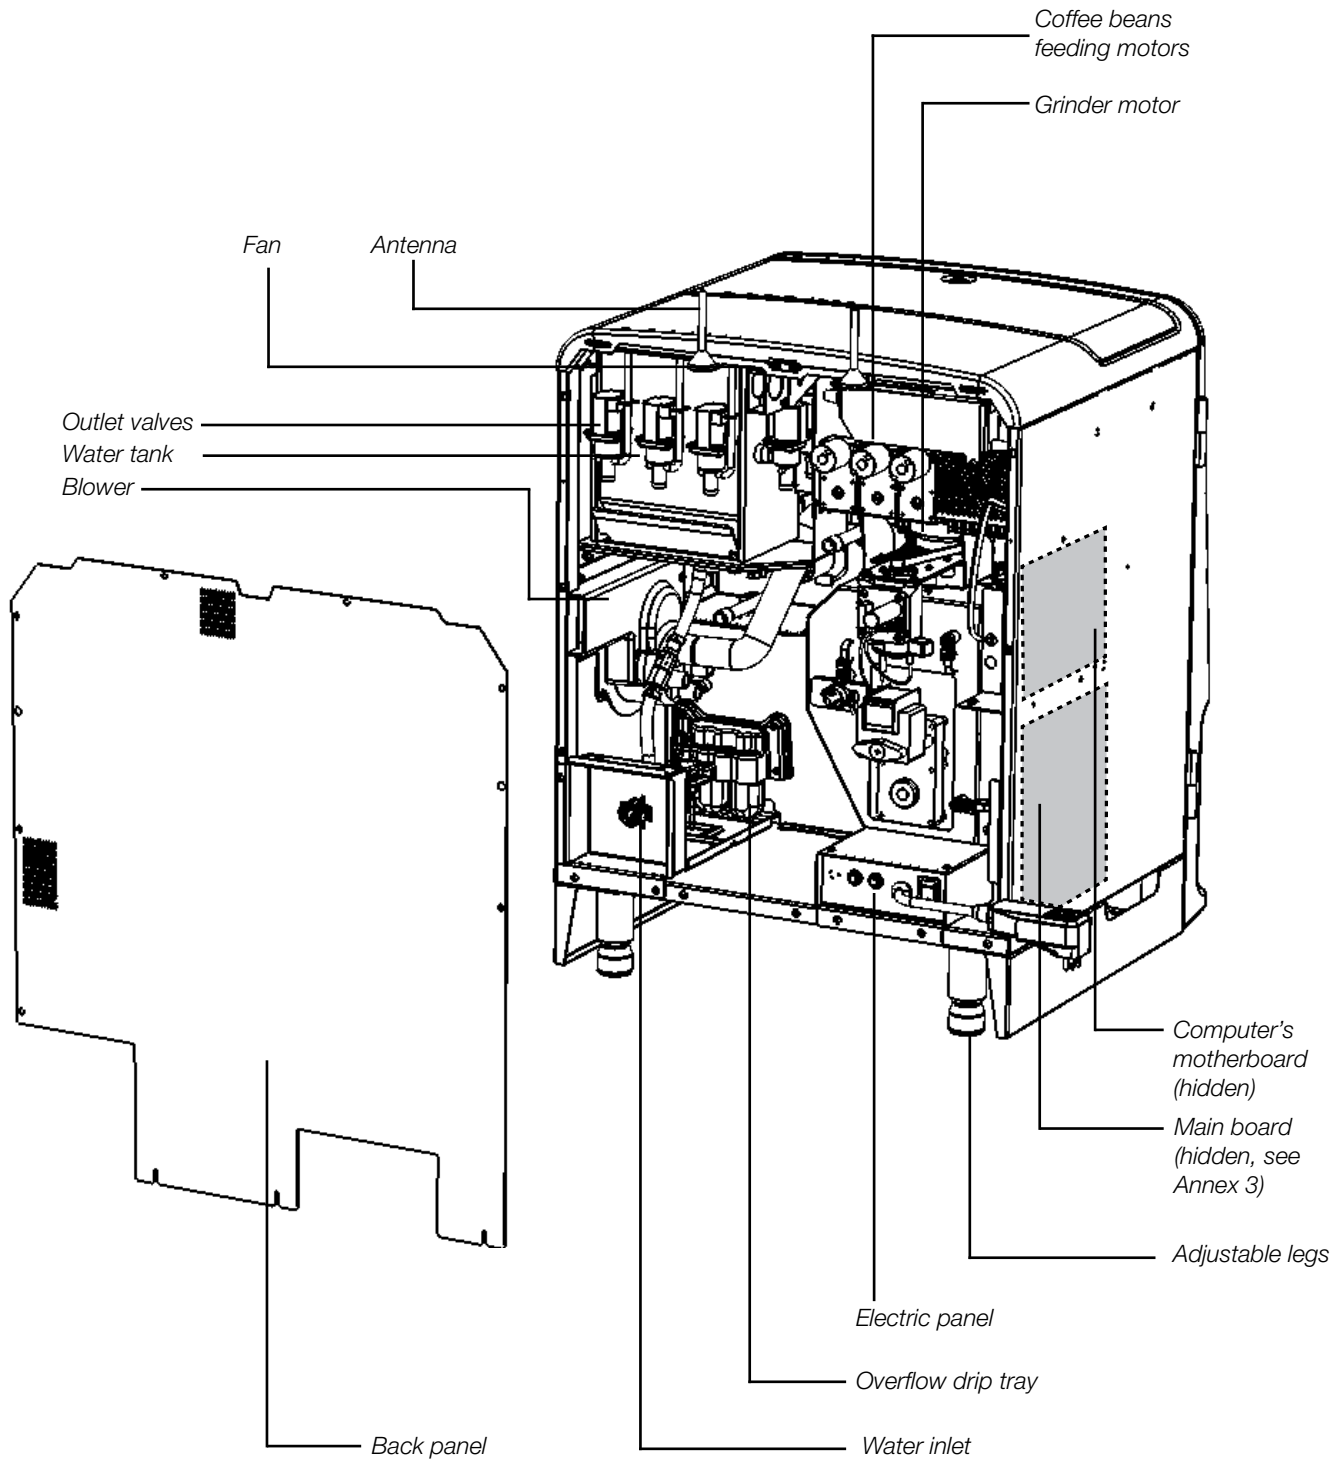

3.3 Internal View

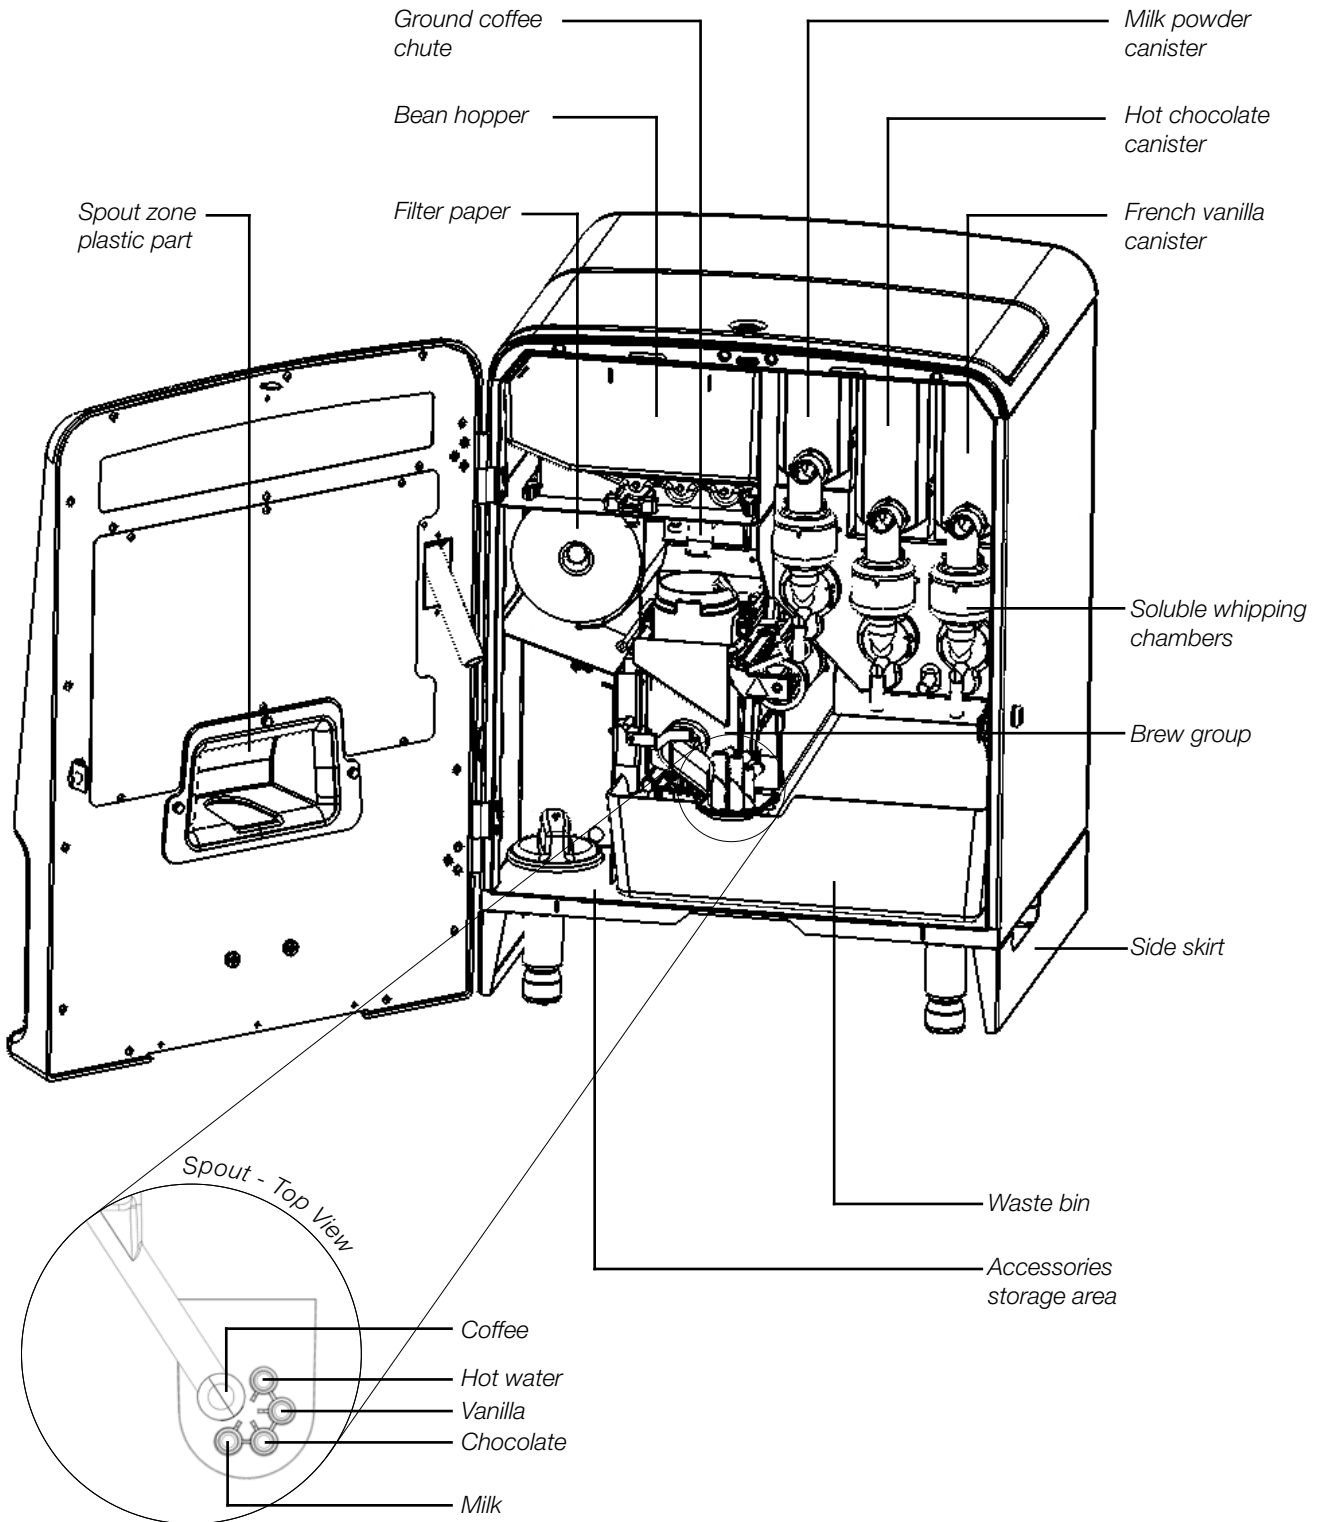


3.4 Brew Group Assembly

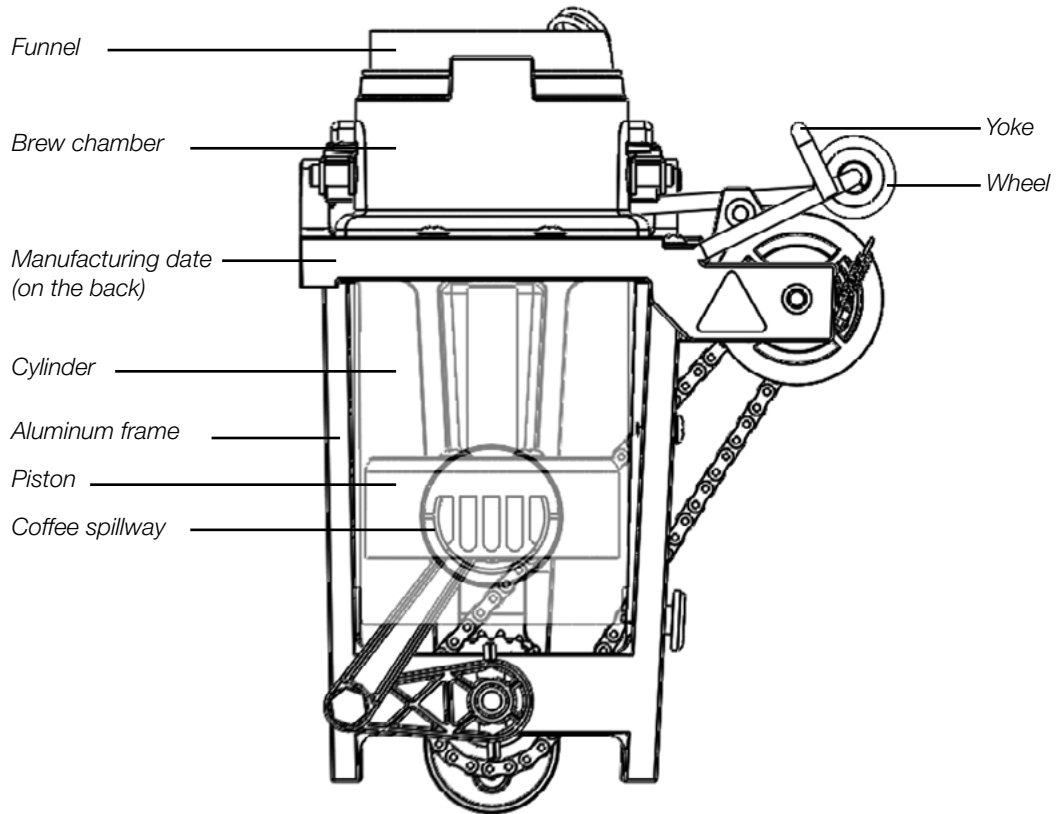


Crush hazard. Handle the brew group cautiously.

3.5 Brewing Process

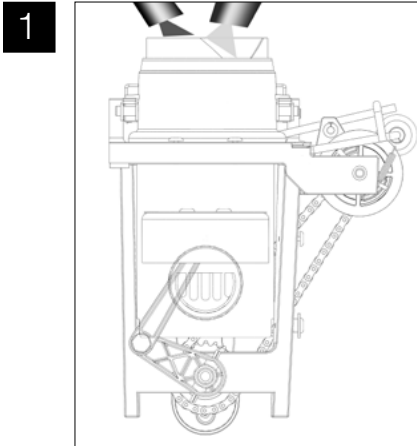


Step 1 - Rise of the Piston

The ground coffee and the water are dispensed into the brew chamber during the rising of the piston. This action compresses the air in the cylinder and forces it through the coffee mixture in the brew chamber, thereby agitating the brewing coffee.

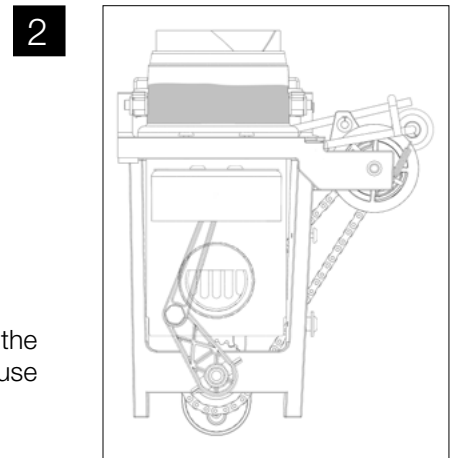


Step 2 - Pause

Once the piston has reached its top point, it pauses to allow the coffee to brew to the appropriate strength. At the end of the pause time, a shot of water is dispensed to clean the brew chamber.

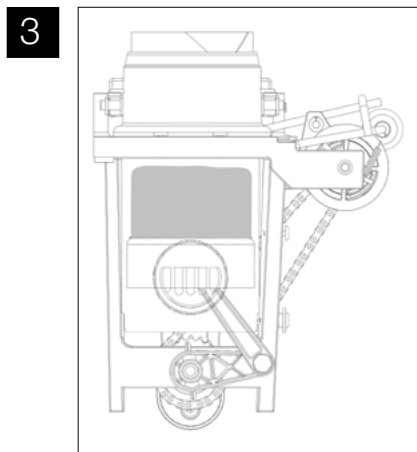

Step 3 - Descent of the Piston

The descent of the piston creates a vacuum allowing to extract the coffee from the grounds through the filter paper and into the cylinder. The piston makes another pause time allowing all the coffee to drain from the brew chamber.

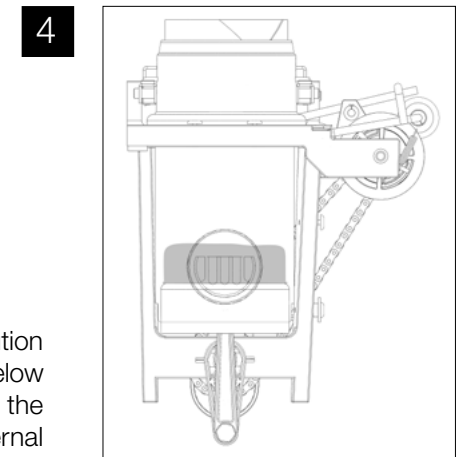

Step 4 - Coffee Delivery

The piston follows its course, heading to its lowest point. Distribution of coffee through the spout begins once the piston has lowered below the coffee spillway. Meanwhile, the brew chamber lifts to allow the filter paper to move and discard the spent grounds into the internal waste bin or coffee chute.

3.6 Hot Water Tank


Access the water tank by removing the back panel.



Make sure the equipment is unplugged when servicing.




If the error message "Low Water Level in Tank" is frequently displayed or if the heating element power supply has been cut out by the water tank safety part (it happens when the heating element turns ON while there is no water in the tank), the water tank needs to be opened to detect any damaged or defective part. Check the following parts: motors behind the water tank, wires around the water tank, water inlet and water tank parts (inside the tank).

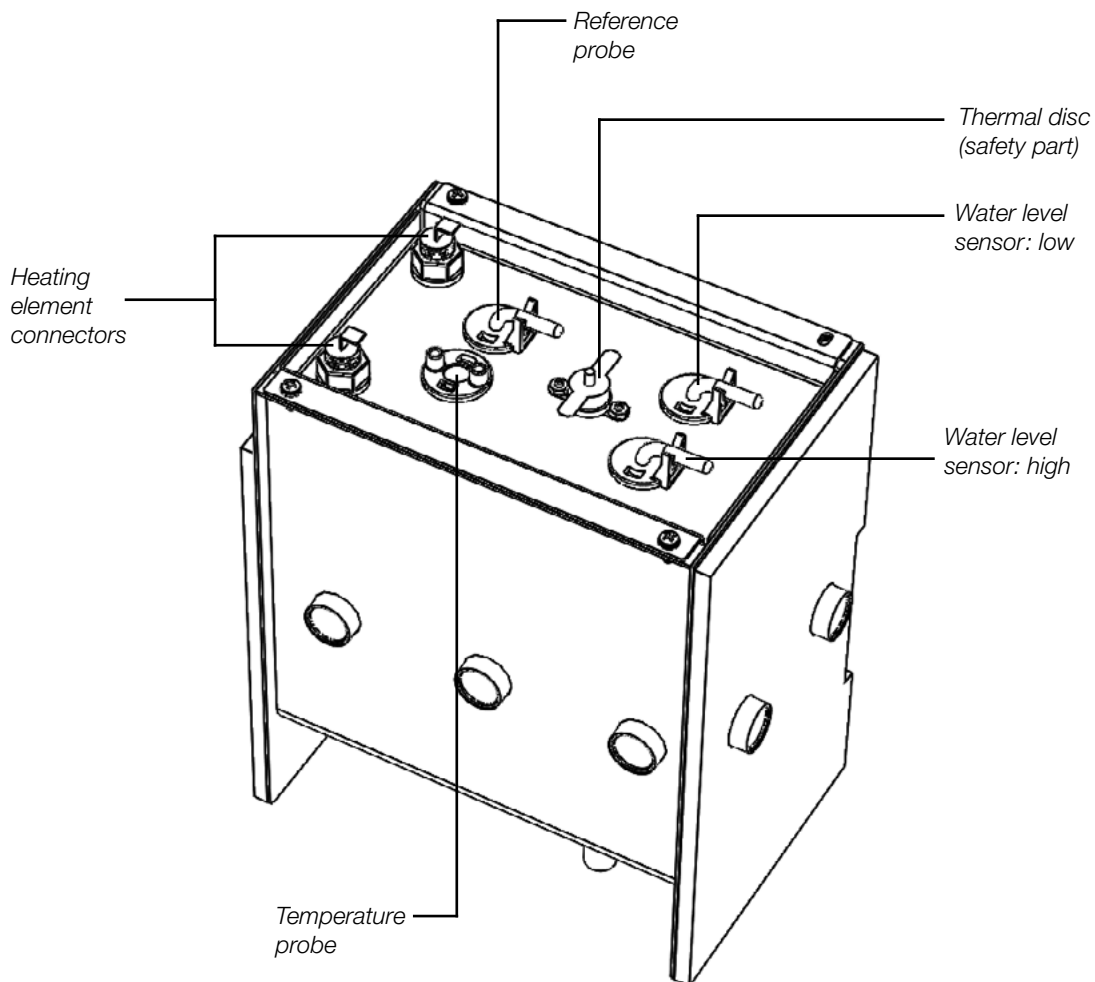

3.7 Bean Hopper Installation

The hopper is already installed in the brewer when shipped. To remove it for cleaning or servicing, follow the steps below.

1. Open the brewer's door.
2. Pull down the bean hopper retaining pin.
3. At the same time, pull the bean hopper forward.
4. To reinstall, slide the bean hopper back in place. The retaining pin does not need to be pulled down.

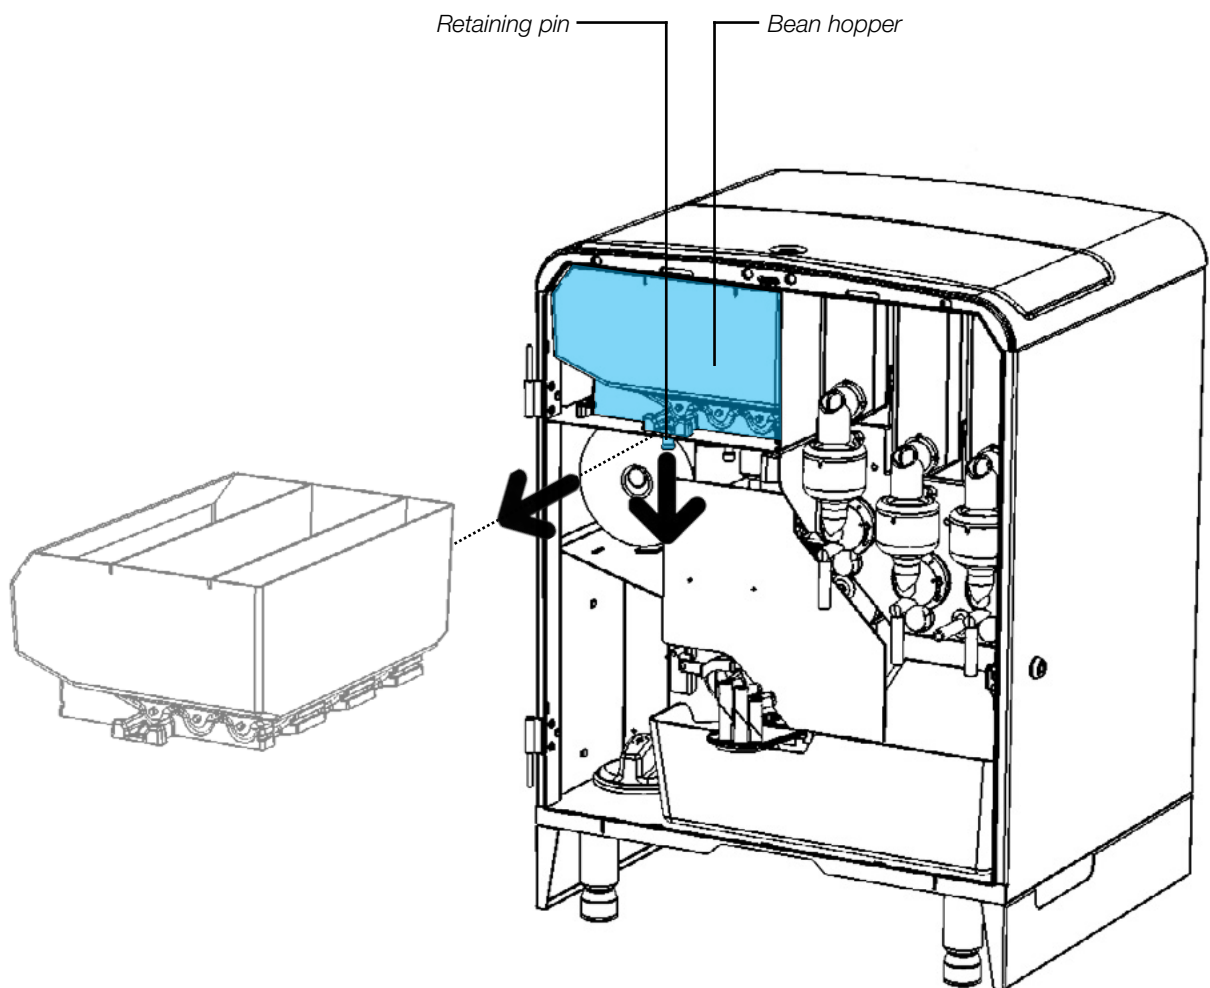

3.8 Water Temperature

This equipment has a water temperature setpoint of 200 °F to ensure a consistent beverage quality. There is a +/- 2 °F tolerance.

This data represents an average and will not correspond to the temperature of a manual measurement. The actual water temperature fluctuates because cold water is added to the tank after every beverage delivery and time is needed to heat the new incoming water up to the setpoint.


Water's brewing temperature can also be taken manually by ordering a cup of hot water and measuring its temperature with a thermometer. There may be a slight difference from the tank reading. This is normal.

If the temperature measurements show a large temperature differential, verify that the tank is clean and not obstructed by mineral deposits and scale.

Unit Safety Measures

In the event of a temperature probe failure, water in the tank might start to boil, causing it to overflow into the overflow drip tray. The machine will be automatically shut off, but the screen will remain ON.

If the heating element goes ON and there is no water in the tank, the heating element power supply is cut out by the water tank safety part. The water tank needs to be opened to detect any damaged or defective part. Check the following parts: motors behind the water tank, wires around the water tank, water inlet and water tank parts (inside the tank).

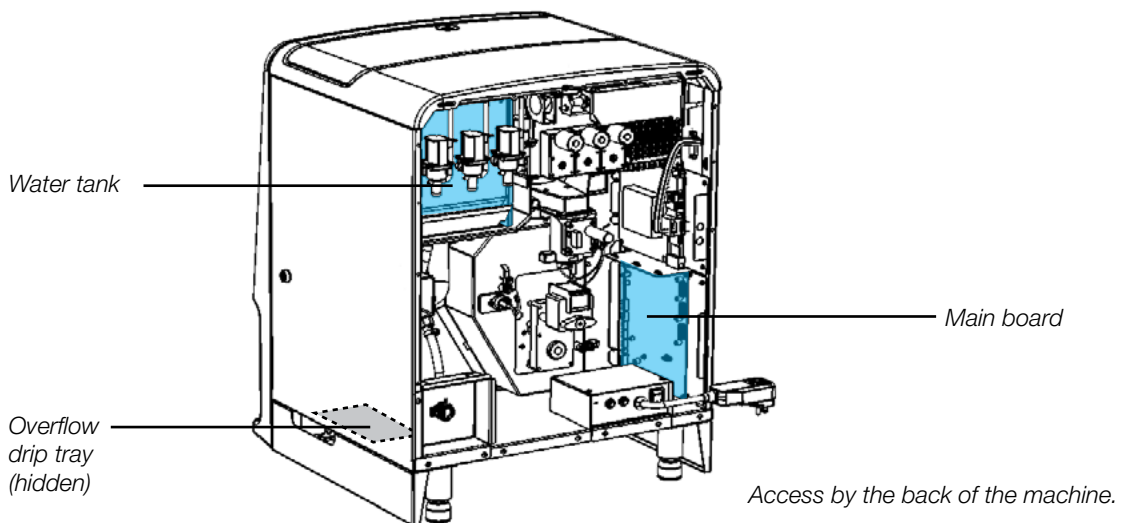

Temperature can be set by the user in Service mode, under the System 1 tab. (See section 6.6.1)

4 INITIAL SETUP

Before installing the brewer at the desired location, it is strongly suggested to unpack, inspect and perform a bench test of the machine at the warehouse.

4.1 On-Site Installation Requirements

4.1.1 Operating Environment

Equipment is for indoor use only.

4.1.2 Power Supply

Make sure each unit has its own electrical circuit and is located within five (5) feet of the dedicated electrical outlet.

Use only a polarized grounded receptacle.

Domestic 120VAC / 60Hz - 15A circuit. NEMA 5-15 outlet.



4.1.3 Water Supply

Use a plastic 1/4" or 3/8" (outside diameter) dedicated line branched off a larger line.

An easily accessible shut off valve upstream of the unit is highly recommended for ease of installation. Make sure that your installation complies with your federal, state, provincial and/or municipal codes.

Cold tap water pressure should be at least 20 psi and no more than 80 psi.



Do not use distilled water.

4.1.4 Tools Required

- Adjustable wrench
- Level indicator



Other tools may be required depending on the type of water supply tubing and location.

4.1.5 Clearance

	Unit	Clearances	Allowance for
Height	29 1/4"	32"	Opening top lid.
Width	22"	32"	Accessing lock (right side) and opening door (left side).
Depth	24 1/2"	23 3/4"	Minimum countertop depth
Back Clearance		1 1/4"	Clearance for water hookup, hoses and adequate air circulation.

See Annex 1 for waste chute positioning.

See Annex 2 for a diagram illustrating required clearance.

4.2 Brewer Specifications

4.2.1 Hopper & Canister Capacities

- Whole bean hopper, left section 4.2 lbs (1.9 kg)
- Whole bean hopper, middle section 3.4 lbs (1.5 kg)
- Whole bean hopper, right section..... 2.0 lbs (0.9 kg)
- Soluble milk 1.2 lbs (0.6 kg)
- Soluble hot chocolate 3.7 lbs (1.7 kg)
- Soluble vanilla powder 3.0 lbs (1.4 kg)

4.2.2 Water Tank

- Capacity 0.74 gallons (2.8 L)
- Water valves 5 simple valves
- Heating element..... 1250 watts

4.2.3 Electrical Specifications (brewer consumption)

- 120VAC
- 12A
- 60Hz


4.3 Unpacking

To remove the unit from the box, carefully cut the straps holding the box in place on the skid. Remove the top of the packaging, then pull up the unit's box. Inspect the unit to see if any damage occurred during shipment.

Some parts and accessories need to be installed on the equipment. Those were placed inside the machine for shipment. Here is a list of all accessories and parts that should be found in the machine.



One of the machine's keys is located at the back of the brewer. A second key is taped on the filter paper roll, located in the internal waste bin.

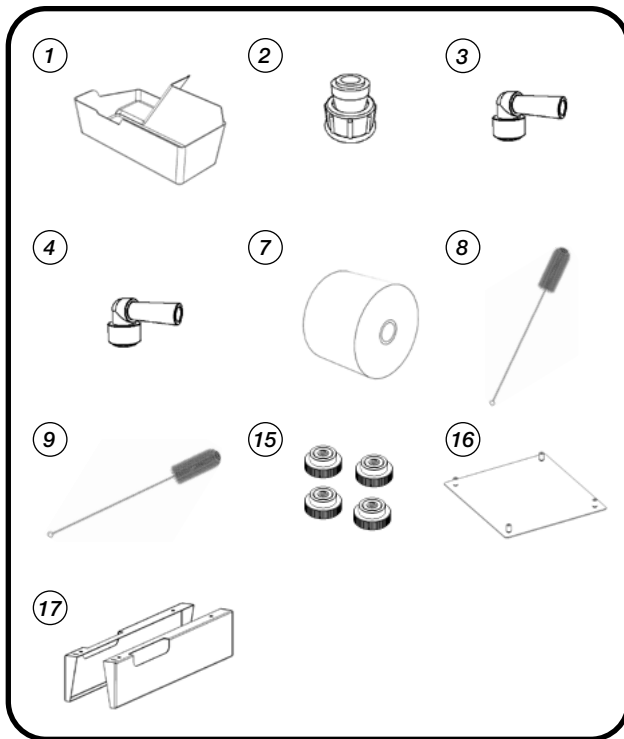


Inside the machine:

1. Internal Waste Bin
2. 3/8" Inlet Fitting
3. 3/8" to 1/4" Elbow Inlet Fitting
4. 3/8" to 3/8" Elbow Inlet Fitting
5. Gage Identification Stickers
6. "Milk" Sticker for Soluble Canister
7. Filter Paper Roll
8. Small cleaning brush (18ACC04)
9. Big cleaning brush (16ACC12)
10. Microfiber Cloth
11. Keychain
12. Service & Installation Manual
13. Initial Setup Instructions
14. Deep Cleaning Reference Guide
15. Thumb Nuts (4)
16. Chute Hole Hiding Plate
17. Side Skirts (right and left)

Optional


18. Plastic Chute Kit (Chute Base and Chute) (17CAB42 & 17CAB43)

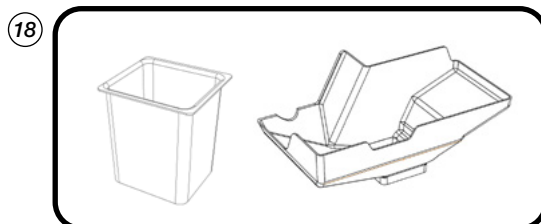

4.4 Leveling the Equipment


For optimal performance of the equipment, it is important to ensure that it is leveled. Avoiding to do so can create variations in product delivery.

1. Open the brewer's door and place a level on a flat surface (coffee bean shelf or internal waste bin shelf).
2. Adjust the four (4) threaded level legs of the equipment with an adjustable wrench to reach a leveled position.

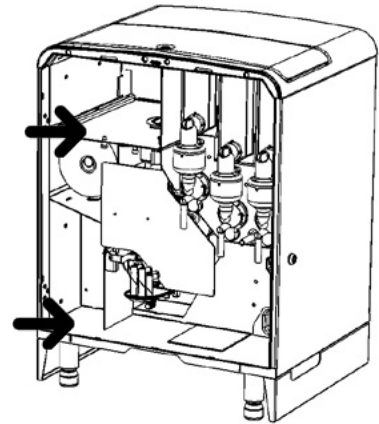


4.5 Side Skirts Installation

1. Open the main door.
2. Slide the skirt on each side under the cabinet. Screws on skirts are already adjusted.

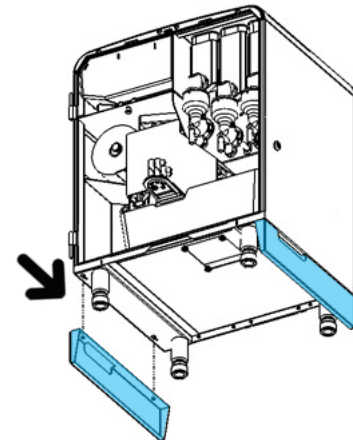

4.6 Drip Tray Installation

Place the drip tray grill on the drip tray, then place it on its support.

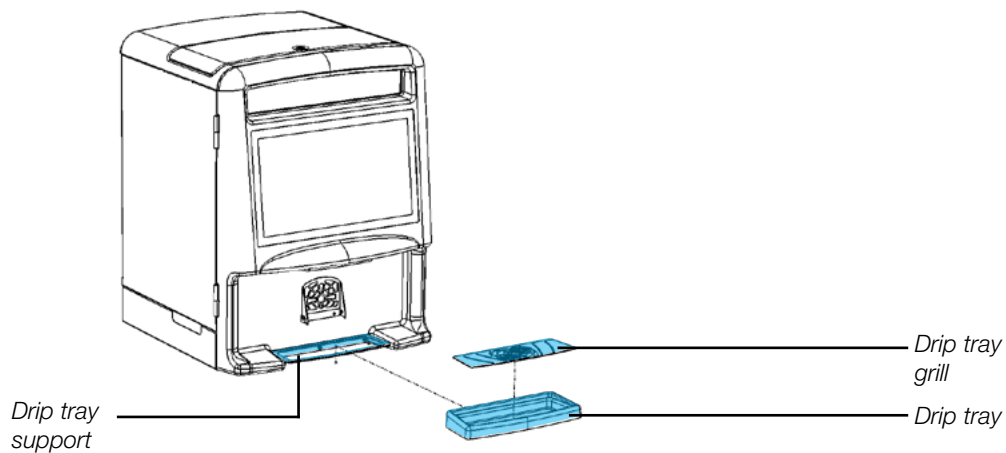

4.7 Water Line Connection



This equipment must be installed in compliance with applicable federal, state, provincial and/or municipal plumbing codes having jurisdiction.

Make sure that the equipment is unplugged before proceeding with the water supply installation. Also verify that the incoming water pressure is greater than 20 psi and no more than 80 psi.




Do not use distilled water.

1. Prior to installing the equipment, flush out the water line by running approximately 1 gallon of water into a pail. This will ensure no sediment from a new installation gets in the equipment.
2. The incoming water supply must have a shut-off valve connected in-line. Water supply should be a plastic 1/4" or 3/8" outside diameter dedicated line branched off a larger supply line.
3. **Make sure the water source is turned off. Firmly secure the inlet fitting onto the inlet valve. Do not overtighten.**
4. **Make sure the equipment is unplugged. Connect the water line to the quick connect inlet fitting.**
5. Turn the water valve on, sending water to the brewer. If there are any leaks, tighten connections to stop leakage.



This procedure does not take into consideration the installation of a water filtration system. Please refer to the water filter manufacturer's installation instructions and incorporate them with the above procedures.

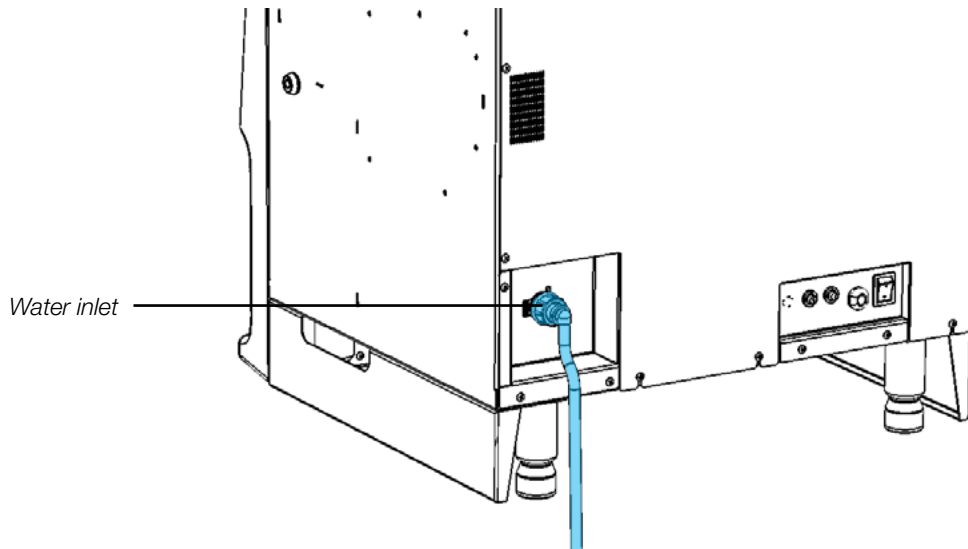

4.8 Electrical Connection




This equipment must be installed in compliance with applicable federal, state, provincial and/or municipal electrical codes having jurisdiction.

Make sure:

- The equipment is OFF before plugging it in.
- The equipment has its own electrical outlet.
- NO extension cord is used.

1. Locate the unit's power cord.
2. Make sure the power switch at the back of the unit is in the OFF position before plugging it into its own grounded electrical outlet.
3. Toggle the power switch to the ON position. The front lights will turn on, and water will automatically enter the machine to fill the tank. The water tank filling process should take a maximum of three (3) minutes.
4. Once the tank is full, water will take 10-20 minutes to heat to brewing temperature.
5. Once the coffee machine is ready, the selection screen will appear.

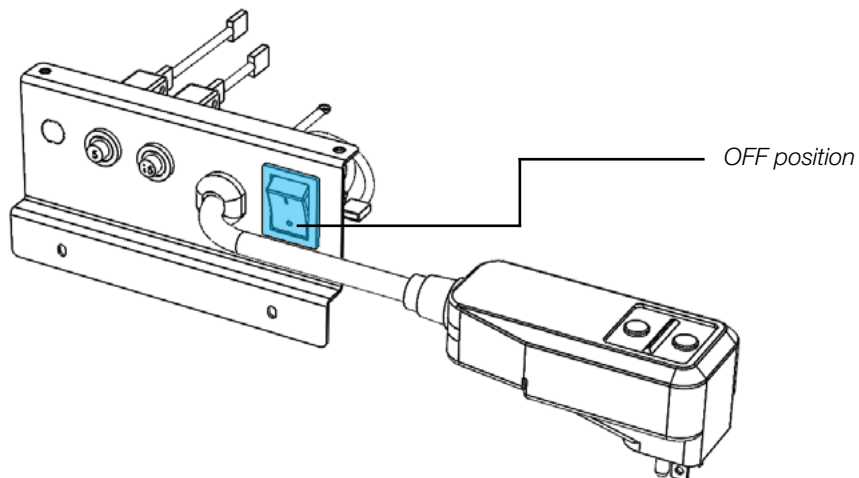

ALWAYS unplug the main power cord from the outlet (AC voltage) when servicing any electrical components on the equipment.

4.9 Loading Products

4.8.1 Soluble Canisters

1. Unlock the product loading door and remove it.
2. Fill the canisters with their appropriate soluble. Remove the appropriate soluble lid to avoid cross-contamination.

Do not overfill the canisters.




3. Reinstall the soluble lids and the product loading door.

4.8.2 Bean Hopper

1. Unlock the product loading door and remove it.
2. Fill the compartments with their appropriate coffee blend.

Do not overfill the bean hopper.

3. Reinstall the product loading door.

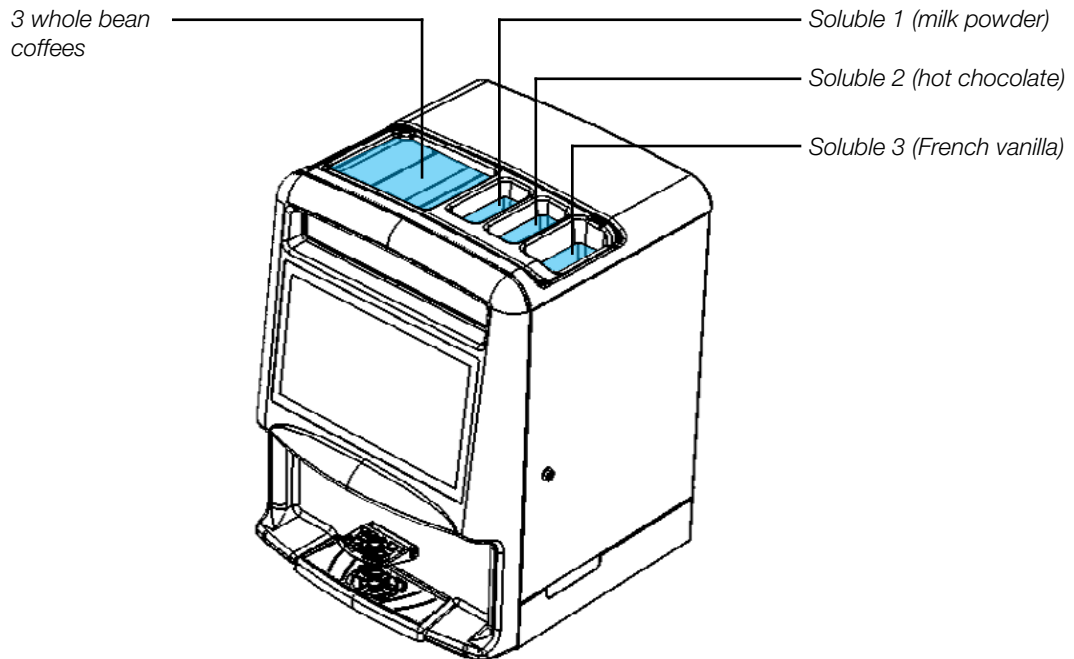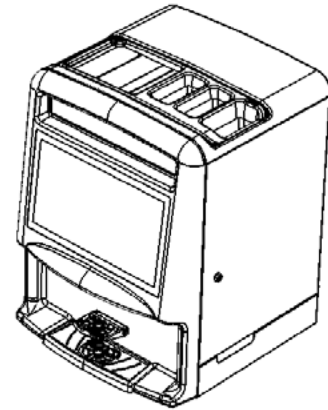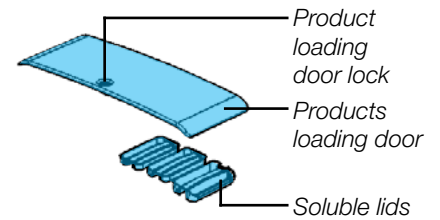

Caution! Flavored coffee beans can contain ethyl alcohol that could affect the bean hopper's longevity. Cafection do not recommend using flavored beans.

4.10 Filter Paper Installation




Make sure the brewer is ON.

1. Place the filter paper roll on the bracket so it dispenses on the left-hand side (see the diagram below).
2. Access Service mode by tapping in order on the top left, bottom left and bottom right corners of the screen and enter NIP 5657 (see section 6). Press on the "Install Filter Paper" button and follow the instructions on the screen.
3. Pass the filter paper under the left guide bracket of the brew group, under the brew chamber and under the wheel guides by gently lifting them using the yoke.
4. Pull on the paper and carry it into the internal waste bin or through the chute hole and into the waste bin (if the machine is equipped with a chute kit).
5. Make sure the paper is feeding straight and stays within the guide bracket.




Improper filter paper feeding will cause a vacuum leak and may cause grounds to spill inside the equipment.

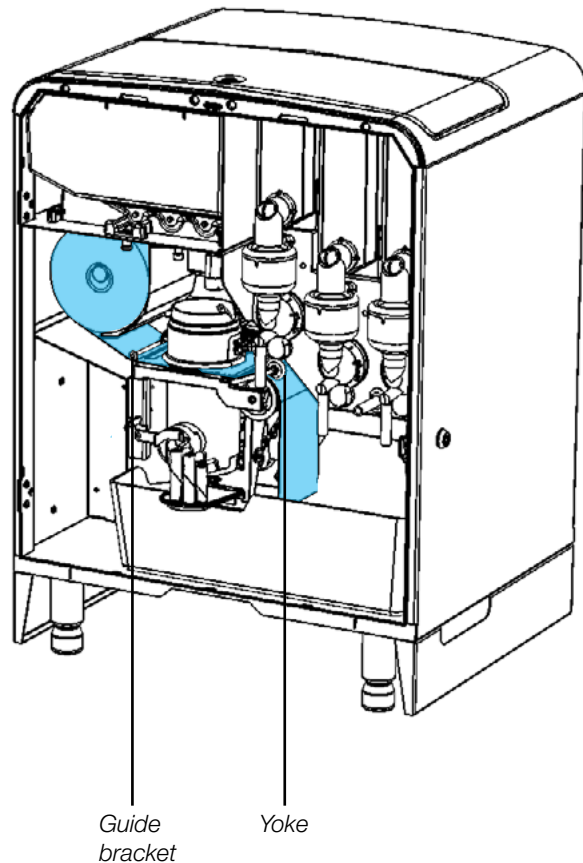


4.11 Chute Hole Hiding Plate Installation

1. Open the brewer's door and remove the internal waste bin.
2. Insert the chute hole hiding plate in the chute hole of the cabinet.
3. Use the 4 thumb nuts to fix the plate under the brewer.

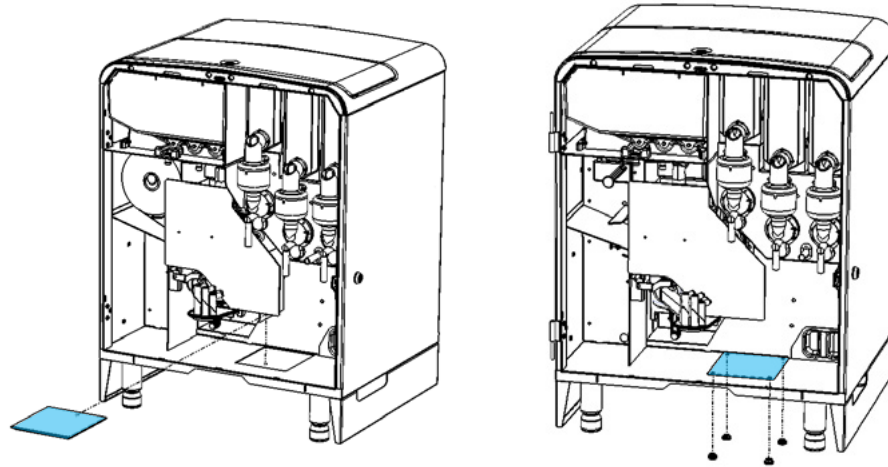

4.12 Chute Kit Installation (Optional)

1. Open the brewer's door and remove the internal waste bin.
2. Remove and discard the chute hole hiding plate (if installed).
3. Insert the chute base inside the chute hole of the cabinet. Make sure the shortest side points to the back of the machine.
4. Insert the waste chute into the chute base.
5. Verify that the filter paper runs through the chute to a garbage.

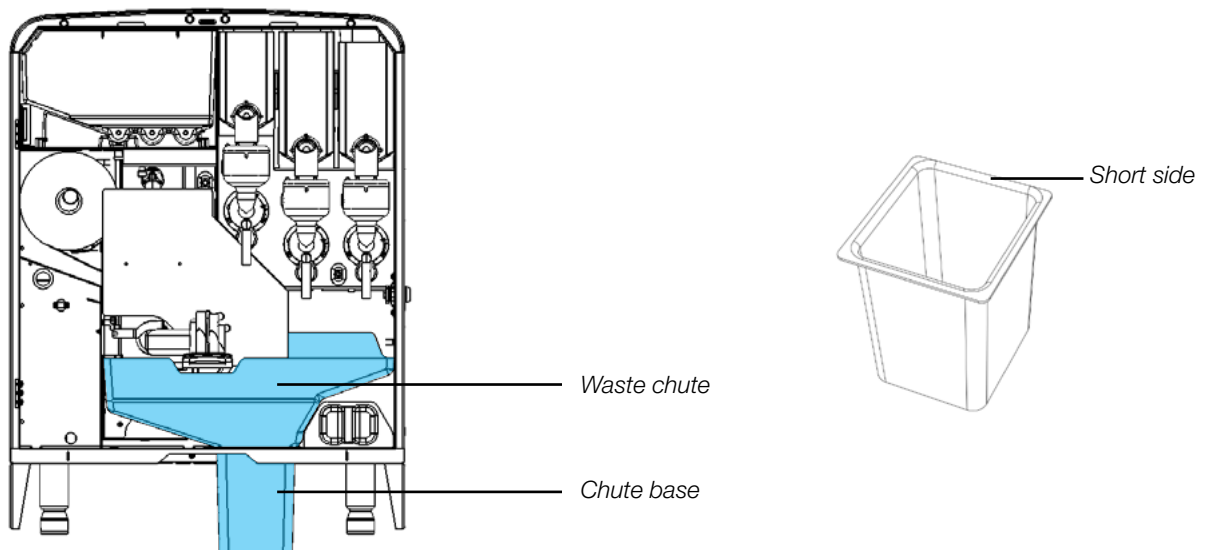

4.13 Installation Verification

It is important to perform several brew cycles on the equipment before completing the installation. At least two (2) cups of each product selection should be ordered to ensure that the brewer is operating as per the specifications laid out in this manual. During this process, review the following checklist as a reminder. Make sure that the brewer is clean, safe and functioning once it is ready to be left on-site.

What to verify

<input checked="" type="checkbox"/>	Inlet valve is free of leaks.	Verify that it is secured and not overtightened.
<input checked="" type="checkbox"/>	Brew chamber is empty of coffee.	Verify that the unit is leveled.
<input checked="" type="checkbox"/>	Filter paper feeds without resistance and goes straight into the waste bin or chute.	Verify that the chute is properly installed. Repeat the installation procedure, if needed.
<input checked="" type="checkbox"/>	Soluble whipping chambers are free of leaks.	Verify that it is installed straight and that the tube is secured.
<input checked="" type="checkbox"/>	Water temperature is acceptable.	Verify water temperature.
<input checked="" type="checkbox"/>	Products are loaded.	Load products.
<input checked="" type="checkbox"/>	Brewer and area are clean and tidy.	Clean and tidy up.

4.14 Coin Changer and Bill Acceptor

The Encore 29 software and hardware are tested and developed using CoinCo products. Cafection recommends using the same brand for complete compatibility.

The following models have been tested and work with the Encore 29:

- MDB Coin acceptor 9300GX (American coins)
- MDB Coin acceptor Guardian 6000
- MDB Coin acceptor 9300CGX (Canadian coins)
- MDB Bill reader Bill Pro BP4SX (American bills only)
- MDB Bill reader Bill Pro BP4-CRX6U

Every bill inserted will be automatically placed into the bill stack, allowing the customer to insert multiple bills in a single transaction. That is why a customer cannot cancel the transaction and have the bill returned. If the transaction is canceled, the value of the bill inserted will be refunded in coins. Bills with a maximum value of \$10 are accepted. Higher value bills will be returned.

The brewer must be equipped with a functional coin changer in order for the bill acceptor to work properly. A bill will only be accepted if the coin changer contains at least the same value in coins in its tubes. Exception: 1\$ will be accepted.



The coin changer issues coins of \$0.05 or more. When setting products selling prices, make sure to set amounts ending with a 5 or 0. For example, if a product is sold at \$1.98 and the customer inserts \$2, the coin changer will not be able to return the \$0.02 due. The right selling price should therefore be set to \$1.95 or \$2.00.

5 USER INTERFACE

5.1 Selection Screen Interface

The selection screen interface is divided into three (3) steps:

1. Select a beverage.
2. Define beverage options (blend, strength, size and milk, if applicable).
3. Brew.

1. Select Beverage.




More beverages may be available

Press X to cancel and go back to the selection screen.

2. Select Beverage Options.

- Blend, Strength, Size and Milk (if applicable). (Options may not all be available according to the selected beverage.)

3. Press "Enjoy Now" to start the drink preparation.

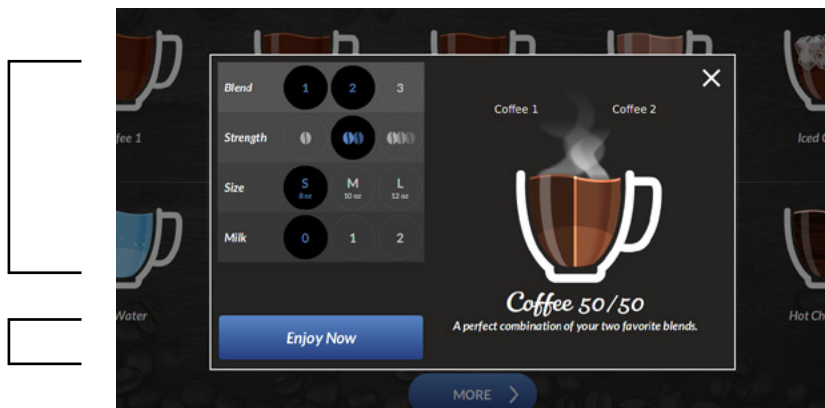

5.2 Carafe Mode




Carafe mode is only available for users with level 2 access or above (see section 6.1) and for users that have been granted access in the Users List and Rights Management section of the Admin sub tab (see section 6.6.6).

Carafe mode is always free, and each drink is counted as a free vend in the sales counters.


When pressing the "Fill up a Carafe" button in Service mode, the screen will automatically return to the selection interface.

The notice "Carafe mode" (bottom left corner) confirms that the machine is in Carafe mode. To quit Carafe mode, go back to Service mode and press the "Carafe Mode is ON" button. It will turn back to white and display "Fill up a Carafe".

To fill a carafe, follow the steps below. If the order needs to be canceled while the brewing is in process, press on the "Cancel" button. The machine will finish its current brewing cycle and will not start another one.

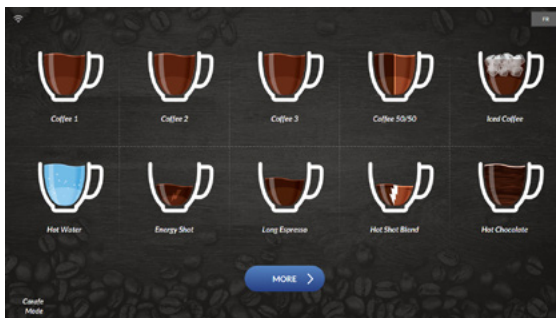


1. Select Beverage.

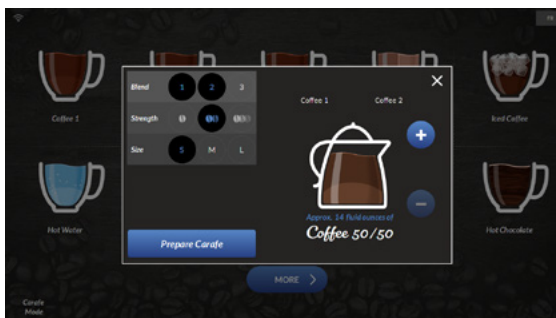

2. Select Beverage Options.

- Blend, Strength and Size (if applicable). Quantity of drinks can be adjusted using the + and - buttons. (Options may not all be available according to the selected beverage.)

Press "Prepare Carafe" to start preparation of the beverage.

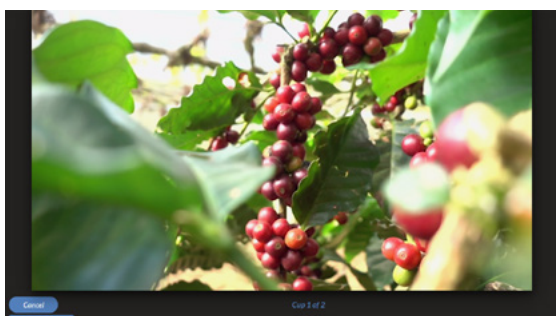

3. Wait until all drinks have been prepared.

5.3 Iced Coffee

The coffee brewed by the machine is hot. It cools down in contact with ice.




The brewer does not make ice. To order this beverage, an ice machine is required.

The iced coffee is prepared in a 12 oz size cup. The size of the drink can be modified by changing the quantity of water in the beverage, but **the screen interface will continue to suggest using a 12 oz cup.**



If there is no ice machine on-site, follow these steps to deactivate the Iced coffee recipe. Access Service mode. Under the recipes tab, select 250_IcedCoff from the drop-down menu. Deactivate the "Enable" checkbox and press Save (see section 6.5.2).

1. Select Iced Coffee.
2. Fill a 12 oz cup with ice and place it on the cup holder. Press on the "Next" button on the screen.
3. Select blend and strength.
4. Press "Enjoy Now" to start preparation of the beverage.

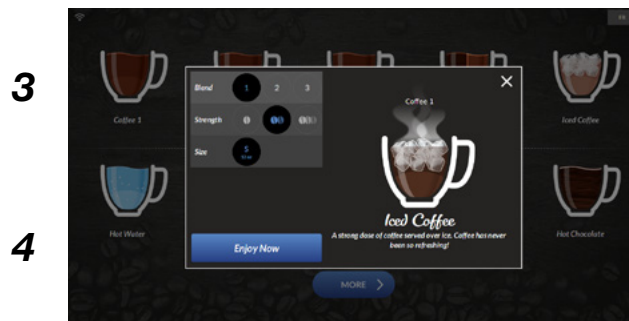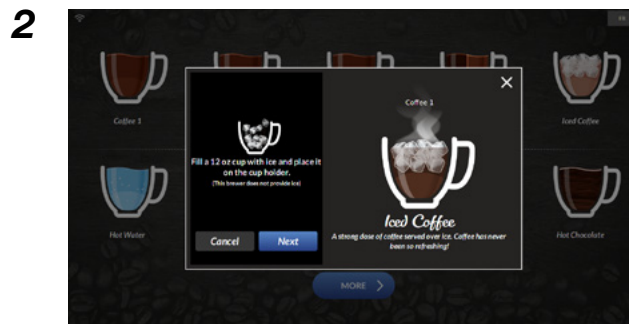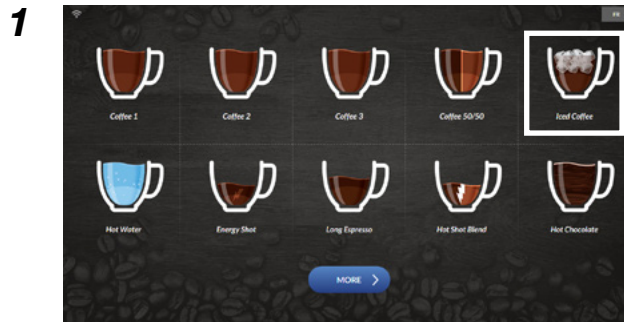

5.4 Selection Keyboard for People with Disabilities (Optional)

(Keyboard compliant with the ADA: *Americans with Disabilities Act*)

The adapted selection keyboard is located lower than the touch screen to help people who are not able to reach the screen or are not comfortable using it to order coffee easily.

To activate this selection keyboard, customers need to press any of its keys.



Using the arrows, move the hand icon on the screen until it reaches the desired button, then press on the green checkmark button to confirm the selection.

The touch screen remains activated all the time even when the lower keyboard is in use.



This icon remains lit all the time.

The other keys only light up when the keyboard is activated.

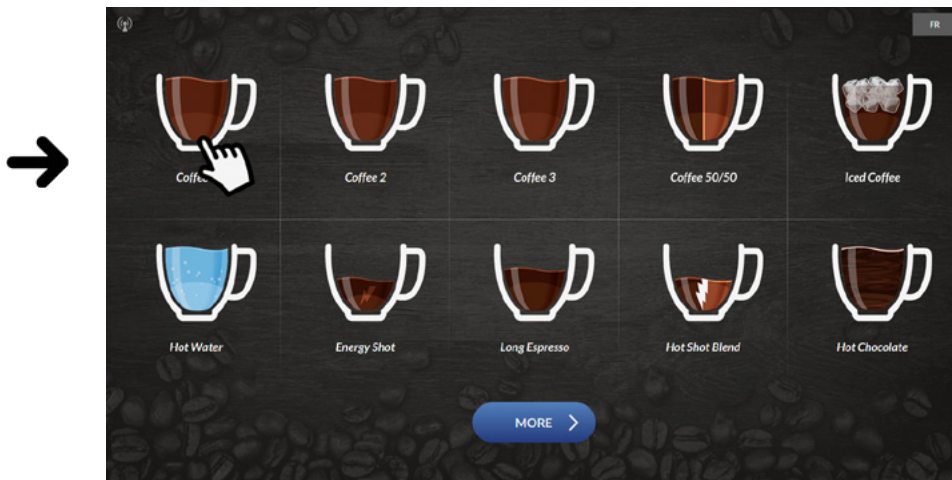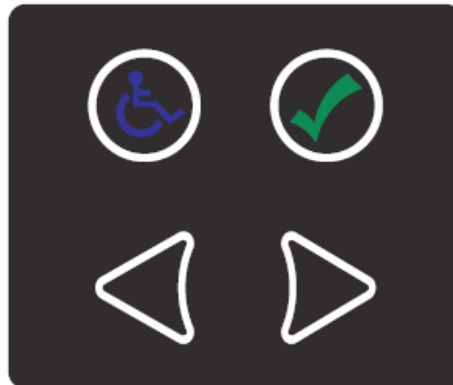

6 SERVICE MODE

Enter Service mode to change recipes, access drinks counters or edit different options on the brewer. Tap on the top left, bottom left and bottom right corners of the screen, in that particular order to enter Service mode (as shown in this image).



6.1 Users Levels

Level 1: For the end user. Beverages selection and ordering only. Level 1 users cannot access the brewer's settings.

Level 2: For service personnel. Basic maintenance (no password required).

Level 3: For service tasks. Recipes modification and system settings access. Level 3 users have access to all tabs and sub tabs in Service mode, with the exception of the Audit tab and the Admin sub tab.

Factory password for this level: tech


Level 4: For administrative tasks. Sales counters (audits) access and passwords modification. Level 4 users have access to all tabs and sub tabs in Service mode.

Factory password for this level: admin




Cafection highly recommends changing those passwords.

Access Levels: **2 2 3 3 3 4**

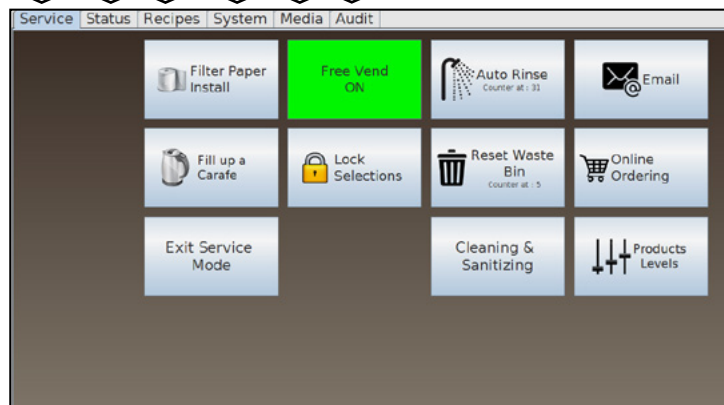

6.2 Service Tab

To access the screen below, tap in order on the top left, bottom left and bottom right corners of the screen (see section 6). The Service tab is the first screen to be displayed.

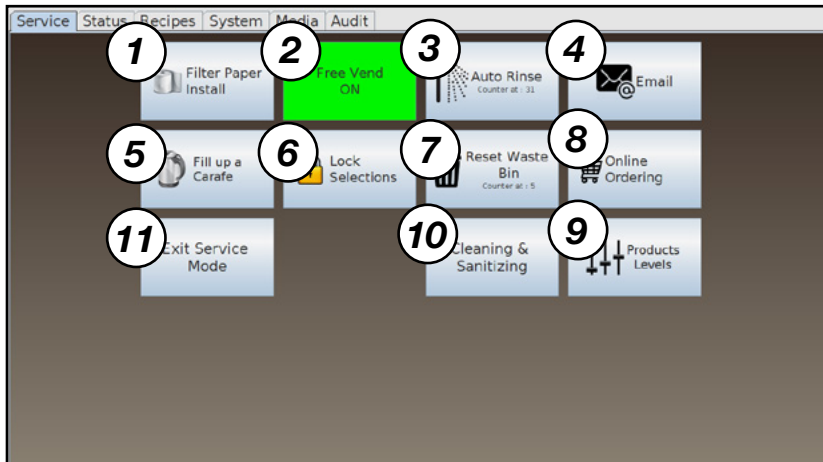

1. This button is used to change the filter paper. Press it and follow the instructions on the screen.
2. This button is used to activate Free Vend mode. When the brewer is in Free Vend mode, the button will be enlightened in green and will show "ON" (in opposition to "OFF" when Free Vend is not activated).




When Free Vend is enabled, the coin, bill and card payment devices will be disabled automatically.

3. This button is used to rinse the brew group, the whipper chambers and the valves. Press it and follow the instructions on the screen.



Make sure to place a container large enough (size is specified on the screen). BE CAREFUL! Water is VERY HOT!

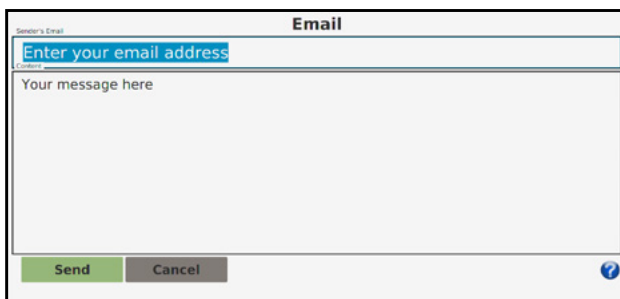


4. This button gives access to the Email Sending interface. It is only visible when the coffee brewer is connected to a cellular or a wireless network.

The user must enter the recipient email address and the message to send to the owner of the brewer, then press the "Send" button. When the user presses one of the two text fields, an alphanumeric keyboard appears.

For more help, press the (?) icon.


5. This button is used to enable Carafe mode (see section 5.2 for details).
6. This button is used to lock the selection screen so no user can order beverages.
7. This button is used to reset the waste bin counter.

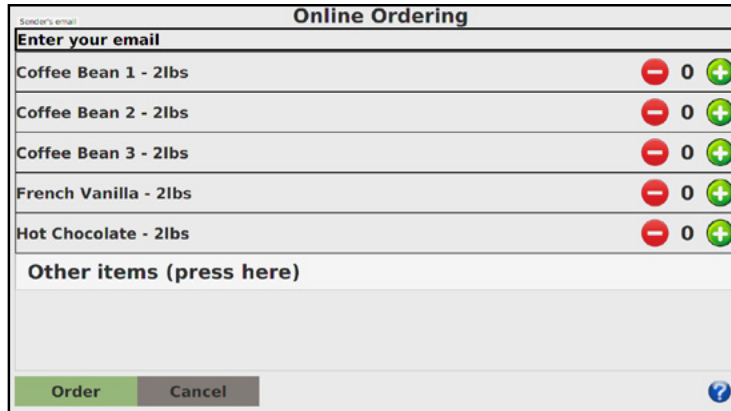

8. This button gives access to the Online Ordering interface, to send an order through **Sophia – Global Management System**. It is only available when the coffee brewer is connected to a cellular or a wireless network.

The user must enter his email and select the items he wishes to order. A text field at the end of the list allows him to add items that are not yet on the list. The owner of the coffee brewer must confirm the order thereafter.

For more help, press the (?) icon.

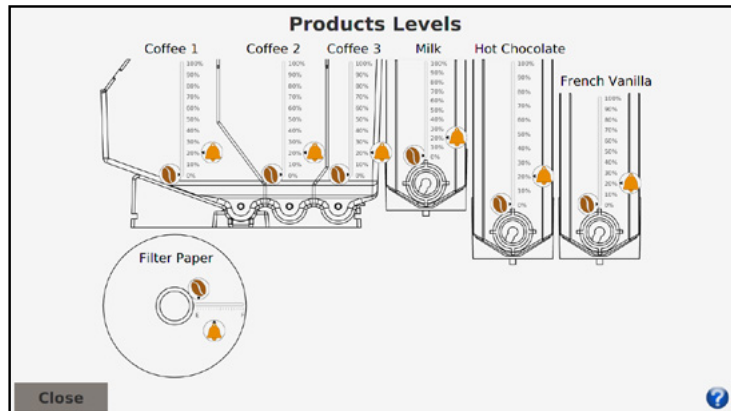

9. This button gives access to the Products Levels interface.

The user first needs to estimate the level of the corresponding product in % (coffee beans, soluble powders or filter paper), then move the bean icon accordingly. Once this percentage has been set, the product level will decrease in accordance with its real consumption.

Using the bell icon, the user can also set the consumption level at which the machine will send an email notification for each product.

For more help, press the (?) icon.




Cafection recommends setting the alert at 25% for each product.

10. This button is used to clean and sanitize the brew group and the grinder using recommended products. See section 7.2 and follow instructions on the screen.
11. This button is used to exit Service mode.

6.3 Status Tab

To access the screen below, tap in order on the top left, bottom left and bottom right corners of the screen (see section 6) and select the Status tab.

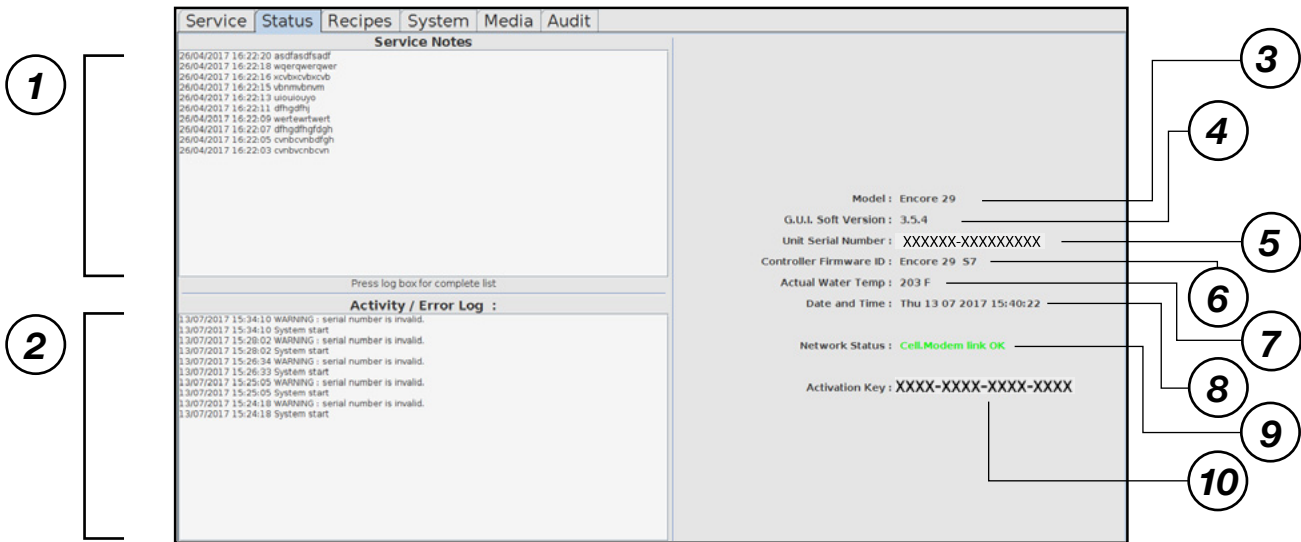

1. Service Notes. Allows the technician to enter the servicing that has been performed on the machine. An alphanumeric keyboard will appear when pressing the text box.
2. Activity / Error log. Displays the last 50 events. Accessible remotely on **Sophia – Global Management System**.
3. Unit model.
4. Software version of the computer.
5. Serial number of the coffee brewer. Correct serial number is mandatory to use **Sophia – Global Management System**. Service users with level 4 access can set the serial number (see section 6.1).
6. Firmware version of the controller.
7. Actual water temperature in Fahrenheit.
8. Date and time. Date and time can be set in the Tools sub tab, under the System tab (see section 6.6.3).
9. Network status :
 - Disabled: Network is offline.
 - Invalid serial num.: The serial number shown on screen is invalid. To verify the serial number, see section 6.6.4 .
 - Wi-Fi no link: Wi-Fi link is activated but the network is not functioning.
 - Wi-Fi link OK: Wi-Fi link is activated and coffee brewer is connected to the network.
 - Cell. Modem no link: Cellular modem link is activated but the network is not functioning.
 - Cell. Modem link OK: Cellular modem link is activated and the coffee machine is connected to the network.
 - Ethernet no link: Ethernet link is activated but the network is not functioning.
 - Ethernet link OK: Ethernet link is activated and coffee machine is connected to the network.
10. Activation key of the brewer. It is used to register the machine on **Sophia – Global Management System**.

6.4 Password Pop-Up

This pop-up window will appear when selecting the Recipes, System, Media or Audit tabs. The user needs to type in his password using the alphanumeric keyboard, then press on ENTER. Depending on the password entered, the user will gain access to different tabs.



6.5 Recipes Tab

To access this tab (see image on next page), tap in order on the top left, bottom left and bottom right corners of the screen (see section 6) and select the Recipes tab. The Information sub tab is the first screen to be displayed.




6.5.1 Customization Sub Tab

The Customization sub tab allows the user to edit blends names or labels. For each blend, it is possible to display only one option (name or label) on the selection screen. Default blend names are Coffee 1, Coffee 2 and Coffee 3.




Coffee names and labels can be edited with Sophia — Global Management System.

1. Use the "Tag" button to select a tag for the associated blend. Use the "Name" button to edit the blend's name using the text box.
2. This button is used to save any changes to the customization settings. Any unsaved changes will be lost.

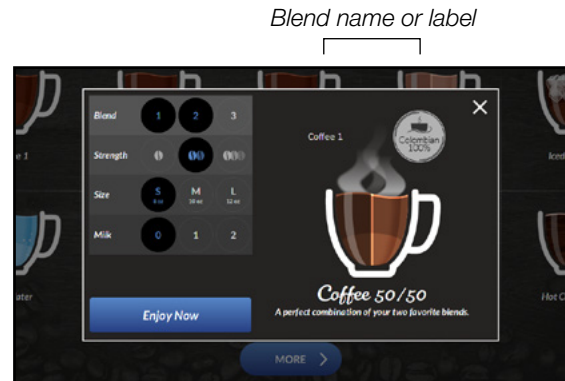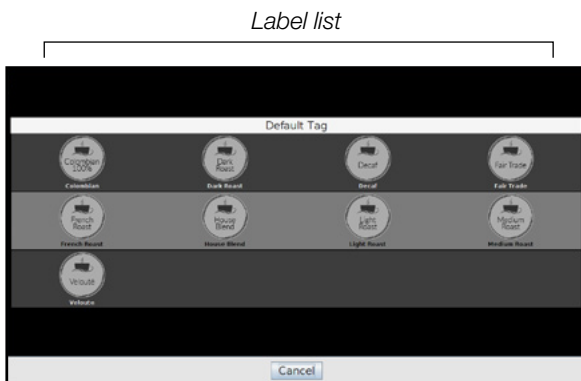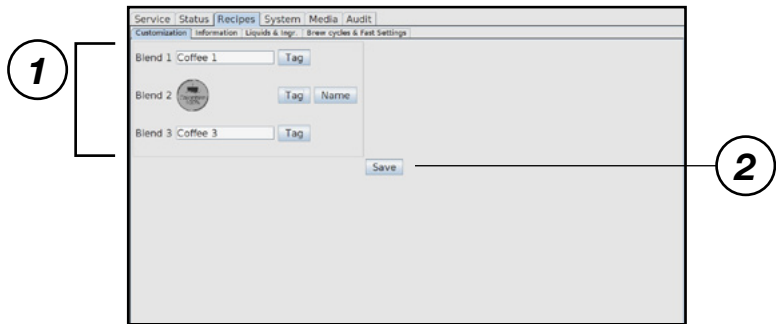

Recipe name

6.5.2 Information Sub Tab

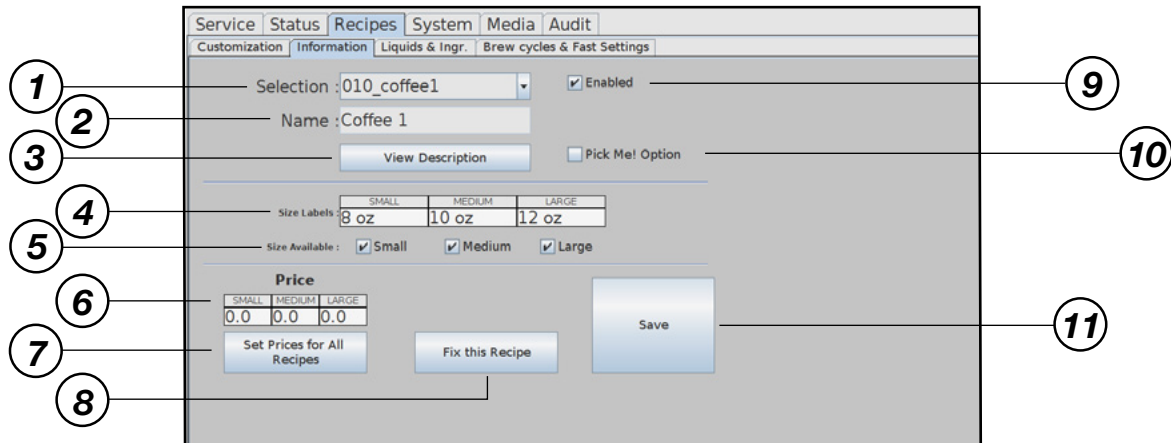


1. This drop-down menu is used to choose the recipe requiring modifications. Coffee 1, 2 and 3 refer to bean hopper sections 1, 2 and 3 (from left to right).
2. This field is used to set the recipe name that will be shown on the selection screen under the beverage's illustration.



If the language of the system is changed, the name of the recipes will be reset to factory settings.

3. This button will show the message displayed during the screen saver for the recipe. The text can only be edited with **Sophia – Global Management System**.
4. This table is used to set the text displayed on the cup size buttons.
5. These checkboxes are used to enable or disable each size for the recipe.
6. This table is used to set the price of the recipe for each size.
7. This button is used to set the price for all recipes at once.
8. This button is used to fix a lost or corrupted recipe by resetting it to default settings.
9. This checkbox is used to enable or disable the drink on the selection screen.
10. This checkbox is used to add the "Pick Me" tag over the beverage on the selection screen.
11. This button is used to save any changes to the current recipe. Any unsaved changes will be lost.



6.5.3 Liquids & Ingr. (Ingredients) Sub Tab

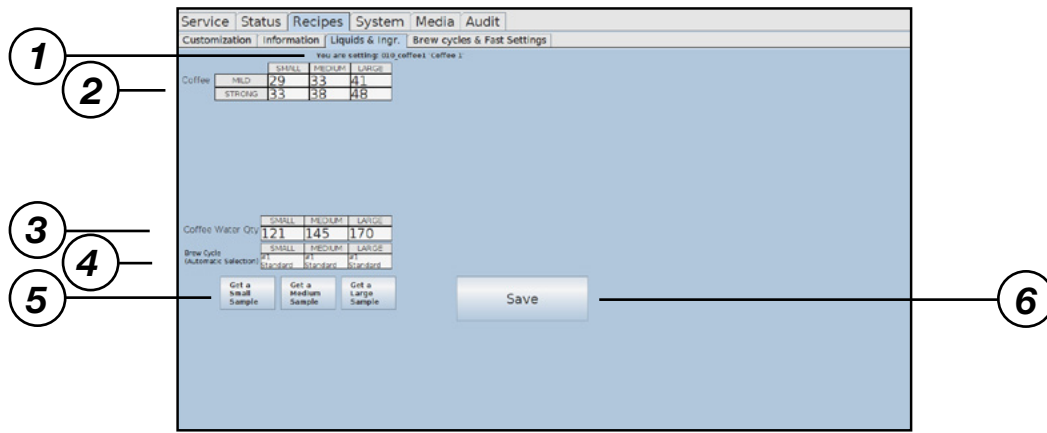

All values used for the recipes are time values. The water quantity values represent the amount of time the dispensing water valve is opened. The coffee or soluble quantity values represent the amount of time the motor is running. 20 units = 1 second.

The right section of the numeric keypad indicates **an estimated conversion** of the value in units to a milliliter (ml) and to a US ounce fluid (oz) for liquids, or in grams (g) for the ingredients.

1. This line indicates which recipe is being modified (selected in information sub tab).
2. This table is used to set the quantity of coffee required to brew the recipe, if applicable.
3. This table is used to set the quantity of water required to brew the recipe.
4. This table displays the recipe's brew cycle. It is automatically selected by the software.
5. These buttons are used to get samples of each size of the recipe.
6. Select the save button to save any changes to the current recipe. Any unsaved changes will be lost.

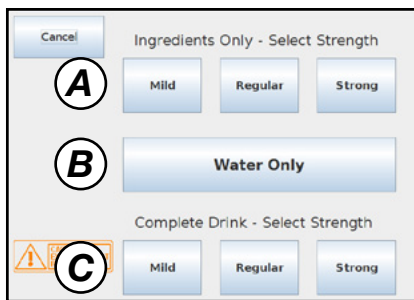


"Get a Sample" Interface

- A These buttons are used to get a sample of all the dry ingredients of the tested recipe, in the desired strength.
In order to weigh the ingredients, make sure to place a container under ALL product dispensers used for the tested recipe.
- B This button is used to get a sample of the recipe without the ingredients.
Make sure to place a recipient large enough under the dispensing nozzle.
- C These buttons are used to get a sample of the entire recipe, in the desired strength.



Samples are not registered in the sales counters.

6.5.4 Brew Cycles & Fast Settings Sub Tab
Brew Cycle Settings Interface

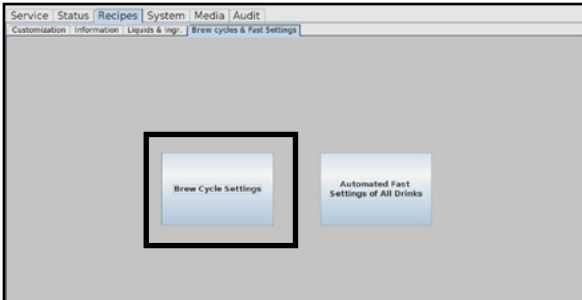

Parameters	CYCLE #1 Standard	CYCLE #2 3 Swirling	CYCLE #3 Double	CYCLE #4 Fast
Extra Grind Time	0	0	0	0
Pause 1	100	120	35	50
Pause 2	110	200	65	80
Move 3	110	122	122	122
Pause 3	250	280	150	160
Pause 4 (Drain)	120	120	95	110

Buttons: Exit (3), Reset to Factory Settings (2)

1. This table is used to set the brew cycles and extra grind time. Press on the quantity to modify it and enter the desired number of units using the numeric keyboard.
2. This button is used to bring all brew cycles values back to factory settings.
3. This button is used to exit the brew cycles settings.



To save any parameters changes, press on the "Exit" button and accept modifications.

The Encore 29 has 4 different brew cycles. The brew cycle is automatically selected in accordance with the coffee and water quantities in the coffee-based recipe.

Cycle #1 (101 to 187 water units)

Standard brew cycle.

Cycle #2 (188 to 269 water units)

3 stirring cycles when the total quantity of water is dispensed in 3 shots. The mix is stirred 3 times, ensuring that the coffee completely comes into contact with water. Ideal for recipes with high water and coffee volumes.

Cycle #3 (270 water units and more)

Double brew cycle. The machine splits the water and ingredients quantities in half to perform 2 separate brew cycles.

Cycle #4 (100 water units or less)

Quick brew cycle. Ideal for recipes with low water level.

Extra Grind Time

The grind time is automatically calculated in accordance with the quantity of coffee grounds set in the recipe. Older grinders might not grind all the beans. Therefore, extra grind time may be added using these fields. **20 units = 1 second. Default setting: 0.**

Pause 1

First contact time between water and coffee grounds. To get more extraction, increase this value. **20 units = 1 second.**

Pause 2

Second contact time between water and coffee grounds. To get more extraction, increase this value. **20 units = 1 second.**

Move 3

Position where the piston stops before dispensing the coffee into the cup.



This setting must be changed with care.

A setting too high will prematurely open the brew chamber, causing a mess of wet coffee grounds inside the machine.


A setting too low will not pull all the coffee through the filter.

Pause 3

Pause time before the brew chamber opens. If there are wet coffee grounds on the filter paper at the end of the cycle, increasing this setting might solve the issue. **20 units = 1 second.**



Pause 4

Brew group drain time. This setting must be high enough to empty the brew group at the end of the cycle. **20 units = 1 second.**



This interface is used to set all coffee drinks' brew cycles. There is no individual setting table per recipe.

Automated Fast Settings of All Drinks Interface

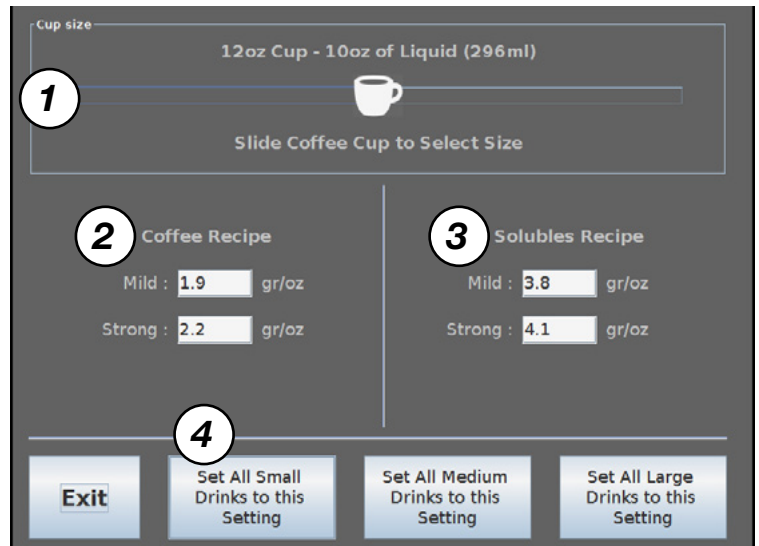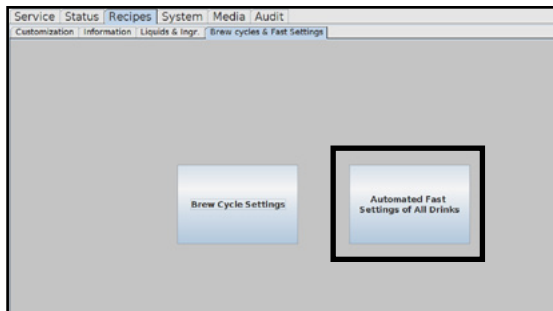

1. This section is used to select desired cup size. Slide the coffee cup icon from 7 oz to 20 oz.
2. This table is used to set the quantity of coffee (in grams) per fluid ounce (oz).
3. This table is used to set the quantity of soluble powder (in grams) per fluid ounce.
4. These buttons are used to assign the settings to a cup size (small, medium and large). All drinks will automatically be set under the Liquids & Ingr. sub tab.




The fast settings function does not affect the Iced Coffee, Long Espresso, Energy Shot, Hot Shot Blend, Café Latte and Cappuccino drinks recipes, which can only be edited manually.


6.6 System Tab

To access the screen below, tap in order on the top left, bottom left and bottom right corners of the screen (see section 6) and select the System tab.

6.6.1 System 1 Sub Tab

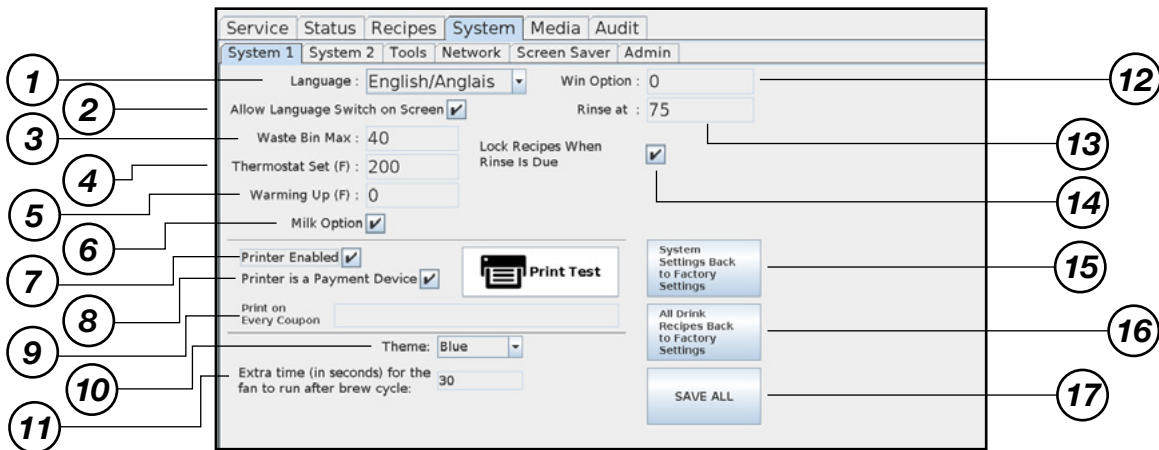


1. This drop-down menu is used to set the language of the system. If the language is changed, the recipes' names will be reset to default values.
2. This checkbox is used to allow any user to switch language directly from the selection screen.
3. This field is used to set the quantity of coffee drinks to brew before showing the "Waste Bin Full" alert. To disable this alert, set the value to zero (0).
4. This field is used to set the water temperature in the tank, in Fahrenheit. Minimum setting is 150 °F, maximum setting is 200 °F and default setting is 200 °F.
5. This field is used to set the minimum temperature of the water in the tank, in Fahrenheit. If the water temperature drops below this setting, the coffee brewer will display an error message until the temperature rises above this minimum. To disable this feature, set the value to zero (0).
6. This checkbox is used to enable or disable the milk option on selection screen for all drinks (if applicable). Uncheck the box to remove the milk option on selection screen.
7. This checkbox is used to enable or disable the optional printer. The printer will not print any coupons if the free vend is ON and while filling a carafe.
8. This checkbox is used to set the printer as a payment device.
If this option is enabled, the customer does not need to insert credits in the coffee brewer to get a drink. The printer will issue a coupon with a barcode associated with the beverage that had been ordered, that the client will bring to another payment location (e.g. store cashier). The printer must be enabled (#7) to activate this feature.
For example : in a convenience store, a customer gets a drink at the coffee brewer and pays at the cashier with the coupon. If this option is disabled (box not checked), the customer will have to insert credits in the coffee brewer to cover the price of the drink. Once enough credit is inserted, the "Enjoy Now" button is enabled and the customer can press it to get the drink and a printed receipt.

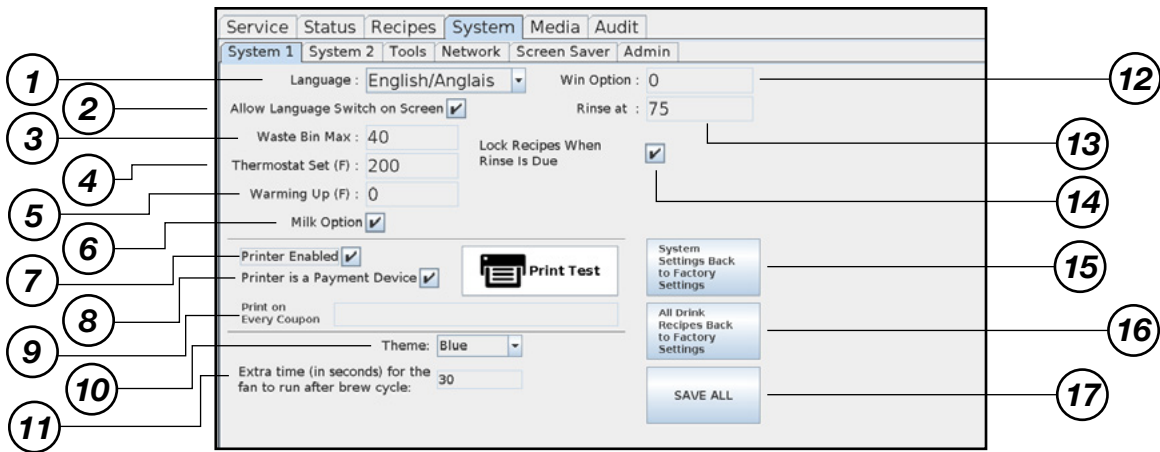


9. This field is used to set a standard message to appear on every coupon printed. Use the print test button to have a coupon sample.
10. This drop-down menu is used to set the color theme of the user interface. The drip tray LED light color will change accordingly.
11. This field is used to add fan running time (in seconds) after brew cycle. It may be useful in a high humidity environment to avoid steam in the front window. To disable this feature, set the value to zero (0).
12. This field is used to set the quantity of drinks to be ordered before a customer gets one for free. To disable this function, set the value to zero (0). It is not recommended to use this feature if the machine is equipped with an optional printer.
13. This field is used to set the quantity of drinks to be ordered before showing the "Rinse Required Soon" alert. To disable this alert, set the value to zero (0).
14. This checkbox is used to lock recipes on selection screen when a rinse is due.
15. This button is used to reset the System 1 and System 2 tabs back to factory settings. This action does not affect the recipes.
16. This button resets all recipes back to factory settings (Information and Liquids & Ingr. sub tabs).
17. This button is used to save all parameters changes. Any unsaved changes will be lost.

6.6.2 System 2 Sub Tab

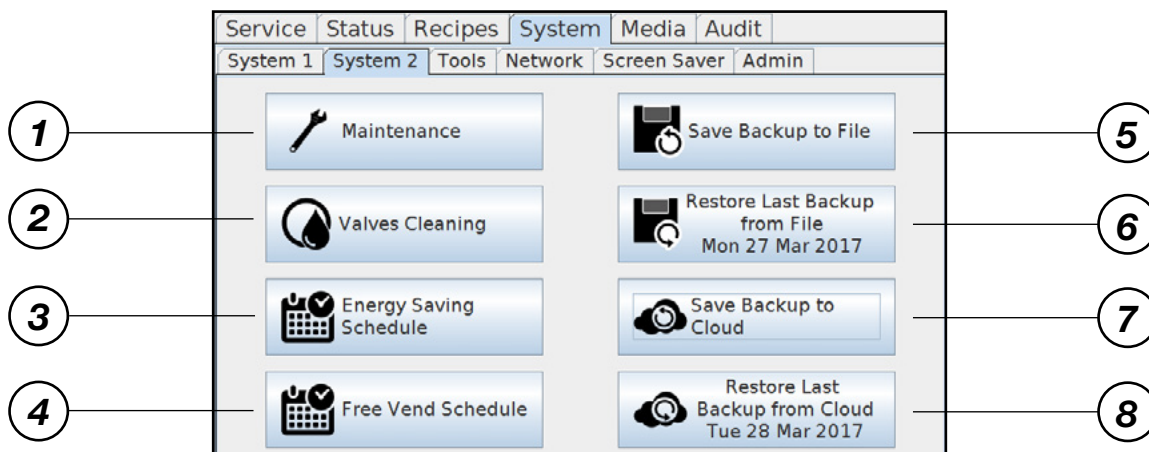


1. This button gives access to the Maintenance interface.

This interface displays the maintenance counters in which each use of a component is recorded. The components requiring maintenance are highlighted in red. To reset a component's counter, press on the "Reset" button. For more help, press the (?) icon.


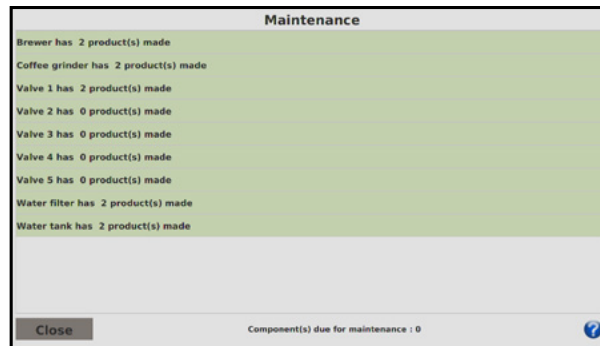


2. This button gives access to the valves self-cleaning interface.

This checkbox allows the user to enable or disable the valves self-cleaning feature during rinse cycles (enabled by default).


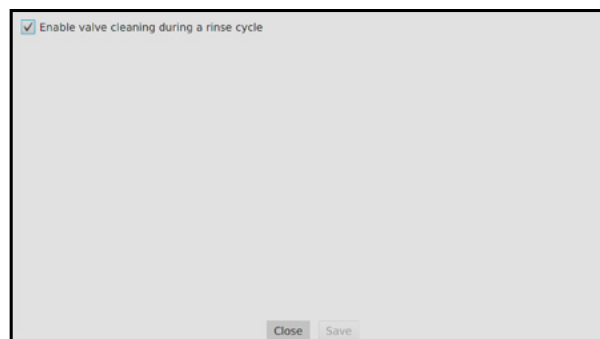


- This button gives access to the Energy Saving Schedule interface.

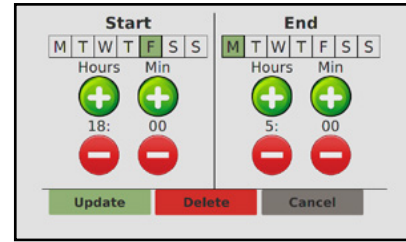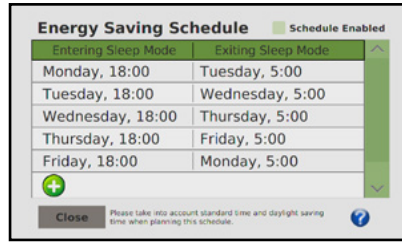

This interface is used to plan sleep periods, reducing the brewer's electricity consumption. By pressing the (+) and (-) buttons, the user can set the time frames during which the brewer will be sleeping. While in Energy Saving mode, the water temperature of the tank is maintained at approximately 140 °F. To order a drink while Energy Saving mode is active, press anywhere on the screen. This wakes up the brewer for 1 hour. The water tank takes 4 to 10 minutes to heat up to the right temperature. For more help, press the (?) icon.


- This button gives access to the Free Vend Schedule interface.

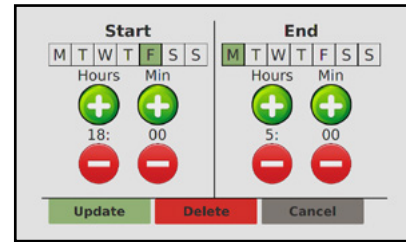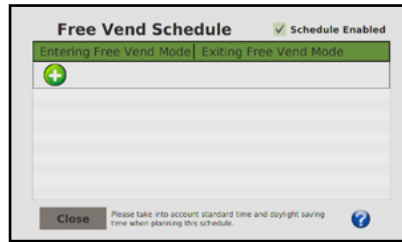

This interface is used to plan Free Vend periods. By pressing the (+) and (-) buttons, the user can set the time frames during which the drinks will be free. For more help, press the (?) icon.

- This button creates a backup file **on the coffee brewer**. The following data are saved in the backup: values of each recipe, configurations, brew cycles, Energy Saving schedules, Free Vend schedules, maintenance data and machine users list.
- This button restores the latest backup file created **on the coffee brewer**. All the data saved on the date indicated on the button will be restored.
- This button creates an **online** backup file (the machine needs to be connected to a cellular network) on **Sophia – Global Management System**. The following data are saved in the backup: values of each recipe, configurations, brew cycles, Energy Saving schedules, Free Vend schedules, maintenance data and machine users list.
- This button restores the latest **online** backup file (the machine needs to be connected to a cellular network) saved on **Sophia – Global Management System**. All the data saved on the date indicated on the button will be restored.


6.6.3 Tools Sub Tab

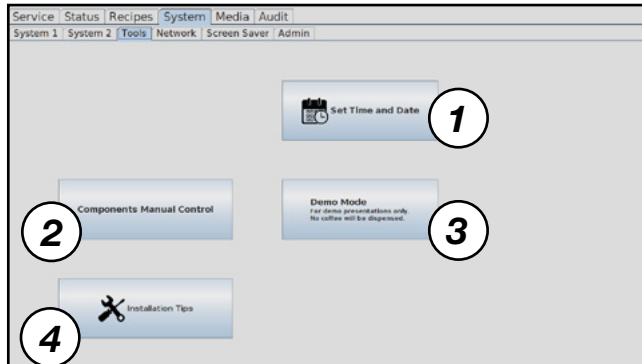

1. This button is used to set the time and date of the brewer.

It is important to set the time and date to ensure the proper functioning of the following:



- Service Log.
- Email Alerts.
- **Sophia – Global Management System.**
- Error Log.

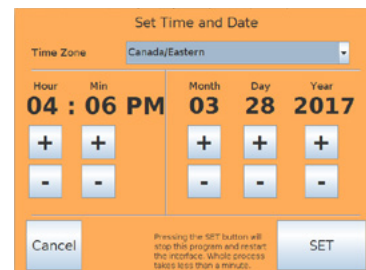

2. This button is used to enter Manual Control mode and manually test the machine's components.





This mode is intended for advanced technicians. Risk of damages to the machine or injuries.

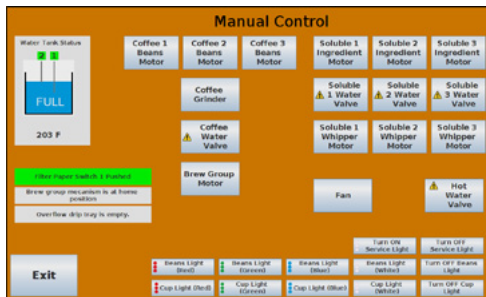

3. This button is used for demo presentations. The user can go through drink selection, and no coffee will be dispensed.
4. This button is used to configure the coffee brewer during the initial setup. It provides installation tips and requirements.

6.6.4 Network Sub Tab

This section is used to connect the brewer to the internet. Use the checkboxes on the left to select the desired connection.

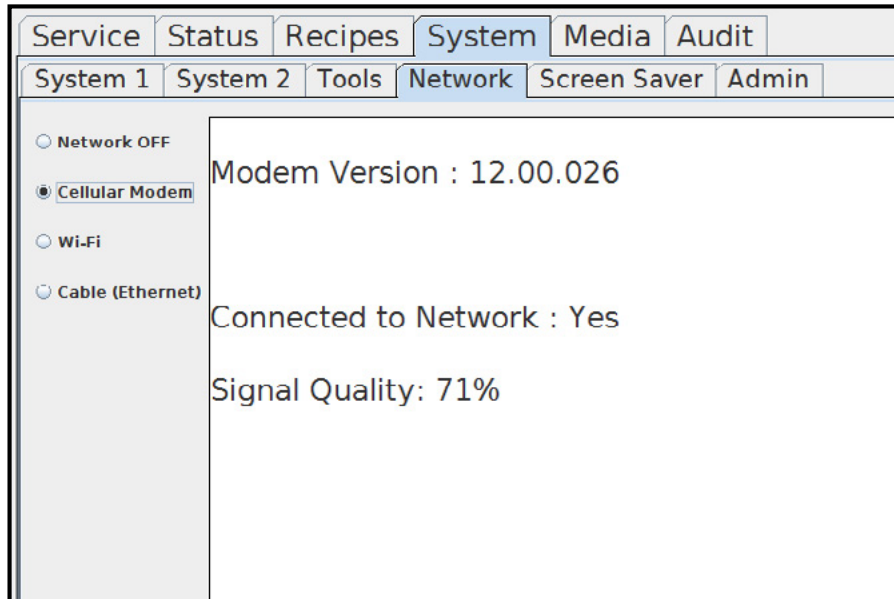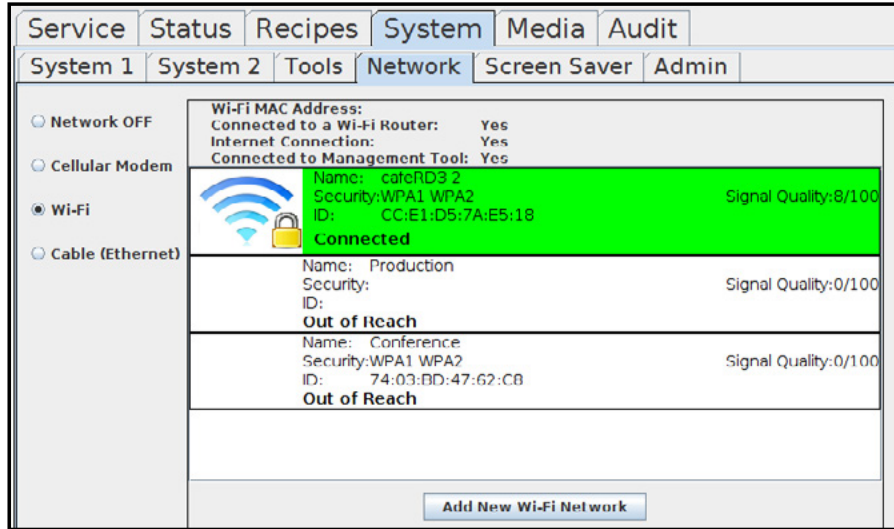

Wi-Fi (Wireless Network)

To connect the brewer to a wireless network (Wi-Fi), check the "Wi-Fi" box and select the desired network in the list.

The security type of the network should automatically be determined by the brewer. If the brewer cannot determine the type of security, select it manually. The person in charge of IT on-site will be able to provide this information.

The coffee brewer is compatible with the following encryption methods:


No encryption (OPEN)

No password required. Press on the "Connect" button. The computer screen will automatically restart.

WPA1/WPA2 Personal AES/TKIP

Enter the network password. Press on the "Connect" button. The computer screen will automatically restart.

Add New Wi-Fi Network

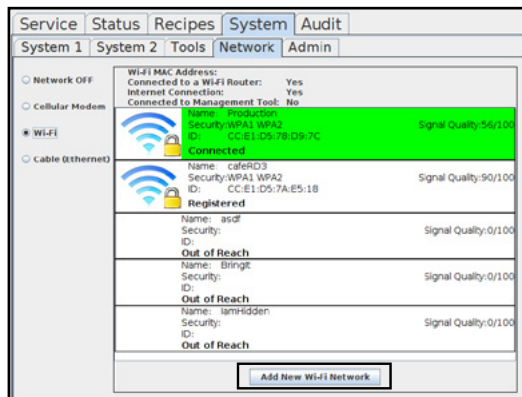

If the wireless network is invisible or not showing in the list, press on the "Add New Wi-Fi Network" button.

The network name (ESSID), its security type and its password (if applicable) are required.

Add New Wi-Fi Network

Network Name:

Security: Open (No password) ▼

Add New Wi-Fi Network


Network Name:

Security: WPA/WPA2 Personal AES/TKIP ▼

Password:

Cellular Modem


The Encore 29 brewer is equipped with a cellular modem. Therefore, it can be remotely controlled through **Sophia – Global Management System**. Access Sophia at www.sophiagms.cafection.com. Log in and register the unit. If no account has been created yet, use the "Create New User" button.

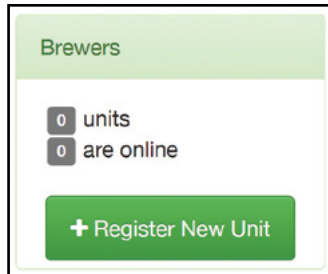

The cellular modem is located inside the machine, behind the power supply. Remove the back panel to access the cellular modem. The antenna is located at the back of the machine, on its support.

The following table provides information about each LED light's signification.

Power	
Not lit	DC power not present.
Lit	DC power present.
LS (Link Status)	
Not lit	There is no power to the cellular radio.
Continuously lit	Powered and connected, but not transmitting or receiving.
Slow blink	Powered and searching for a connection.
Fast blink	Transmitting or receiving. Also appears if SIM is not installed.
Signal	
ALL OFF	There is no power to the cellular modem.
Bar 1 ON	Very weak signal ($7 < -RSSI < 14$).
Bar 1 and 2 ON	Weak signal ($15 < -RSSI < 23$).
Bar 1, 2, 3 ON	Good signal ($24 < -RSSI < 31$).

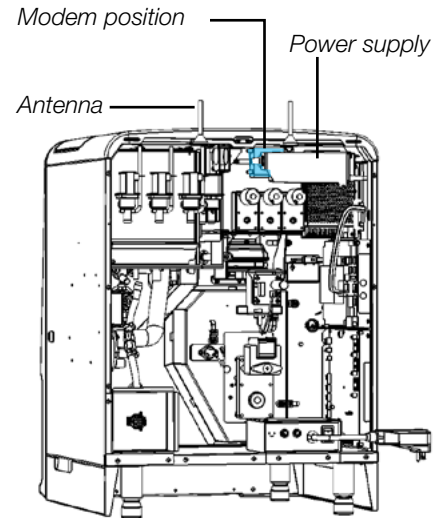


If the "LS" light is off (not lit nor blinking), the modem might not be correctly plugged to the USB port.

Make sure that at least one of the signal lights is on. If no signal is detected, move the antenna. If the problem persists, a high-gain antenna can be ordered at Cafection. For more details, contact Cafection's Customer Service department at **800-561-6162, ext. 311**, or at salesorder@cafection.evocagroup.com.



There are 3 ways to verify if the brewer has successfully been connected.

1. Under the Status tab.


The network status indicates "Cell. Modem link OK" or "Wi-Fi link OK"

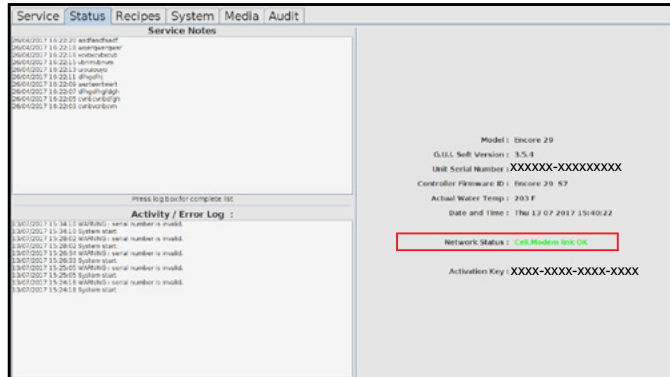

2. In Service mode, under the System tab, in the Network sub tab.

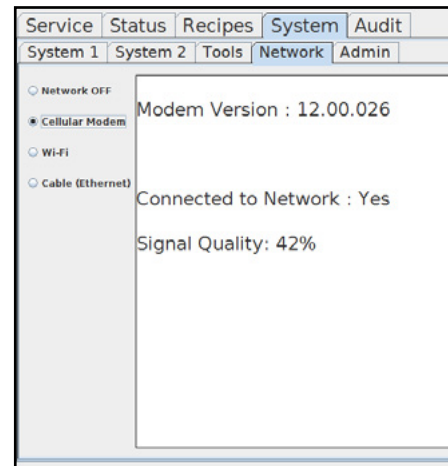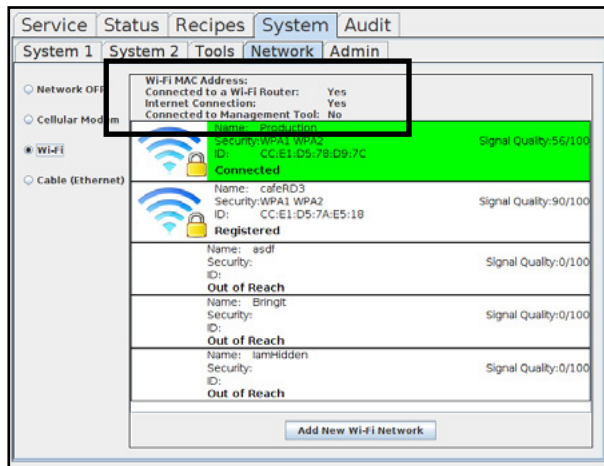


3. On the selection screen, the icon of the cellular or wireless network signal is active (top left corner).

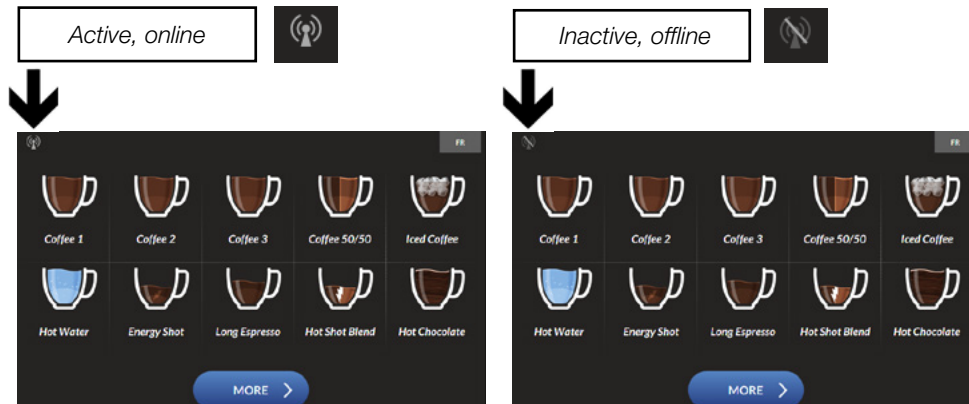

6.6.5 Screen Saver Sub Tab

The Screen Saver feature is used to promote the brewer's available products when the machine is not in use. It can be edited in the Screen Saver sub tab.

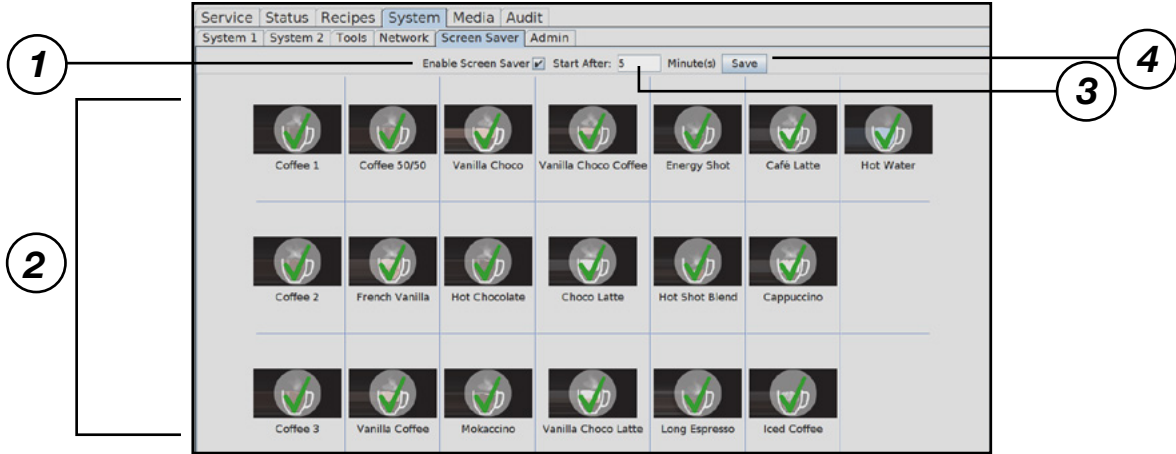

1. This checkbox is used to enable or disable the Screen Saver feature.
2. Select the beverage(s) to be displayed while the screen saver is ON. A green checkmark over a selection means it is selected.




If a blend's name has been modified in the Customization sub tab (see section 6.5.1), this name will automatically be updated in the Screen Saver sub tab.

3. This field is used to set the period of inactivity (in minutes) required before the Screen Saver feature is displayed.
4. This button is used to save any changes to the Screen Saver. Any unsaved changes will be lost.



Use Sophia – Global Management System to edit the screen saver videos and interface.


Screen saver example

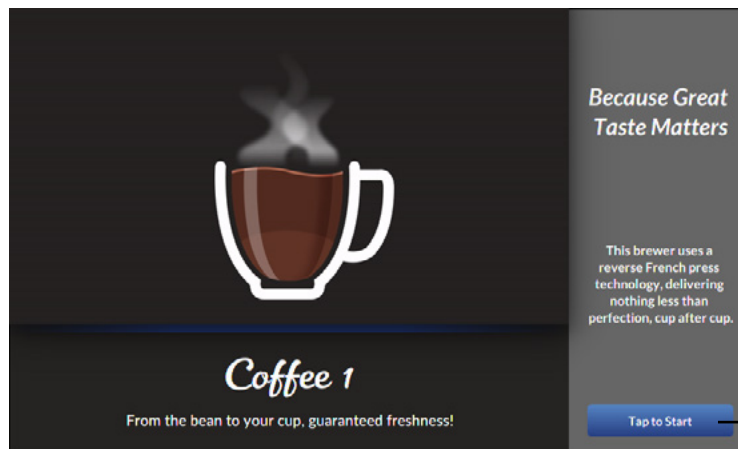

Tap this button to go back to the selection screen.


6.6.6 Admin Sub Tab

The Admin sub tab is available to level 4 users only (see section 6.1).



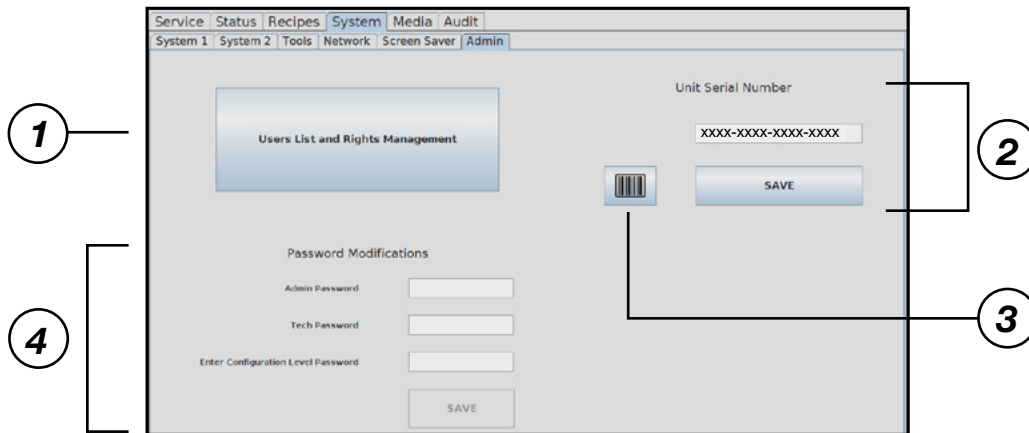


1. This button is used to create a list of users authorized to activate Carafe mode, Free Vend mode and/or order one free drink directly from the selection screen.

- To create a new user, click on a blank field under the Name section and enter the name of the user.
- Enter a PIN from 1 to 9999 (for a minimum security, a PIN of 4 digits is recommended).
- Check the box of each authorization that needs to be granted to this user.
- Press on Save & Exit and save changes.

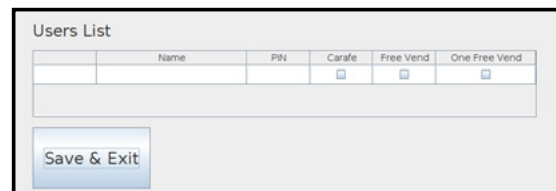

If at least 1 user is created, a user icon appears on the selection screen (top right corner). When the user presses on this button, a pop-up window with a numeric keyboard appears. Once the user has entered a correct PIN, he will be able to activate the authorization(s) he has been granted. If the user enters an incorrect PIN five times in a row, the user icon will be locked. To unlock it, enter and exit Service mode by tapping in order on the top left, bottom left and bottom right corners of the screen (see section 6).

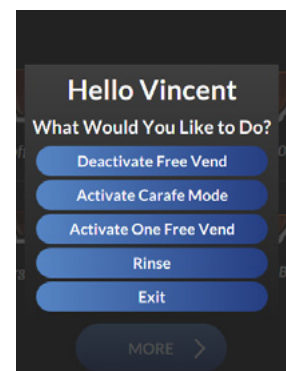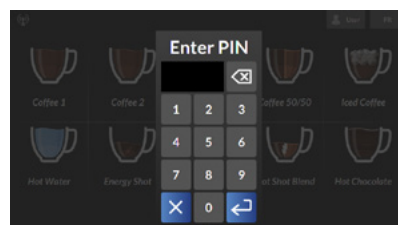

When a user activates the Free Vend or Carafe mode, the related button in Service mode highlights and indicates the name of the user who set it.



2. This field is used to enter the serial number of the coffee brewer. For proper functioning of **Sophia — Global Management System**, the serial number must be the same as the one indicated on the sticker inside the machine, on the wall beside the third soluble canister.



It is important to enter the serial number of the machine every time the flash card is replaced.

3. This barcode is reserved for Cafection use.
4. These fields are used to modify the levels 3 and 4 users' passwords (see section 6.1) and the PIN used to enter Service mode.

If the passwords have been changed, lost or forgotten, a general reset must be performed. Performing a general reset will reset all drink recipes, settings and passwords, but not the permanent sales count, the users list and the serial number. Contact Cafection's Technical Support team for the procedure at **800-561-6162, ext. 310**.


6.7 Media Tab

While a beverage is prepared, a video plays on screen. The Media tab is used to edit the video playlists.


To access the screen below, tap in order on the top left, bottom left and bottom right corners of the screen (see section 6) and select the Media tab.

6.7.1 Current Playlist Sub Tab

The Current Playlist sub tab allows to edit the main playlist.

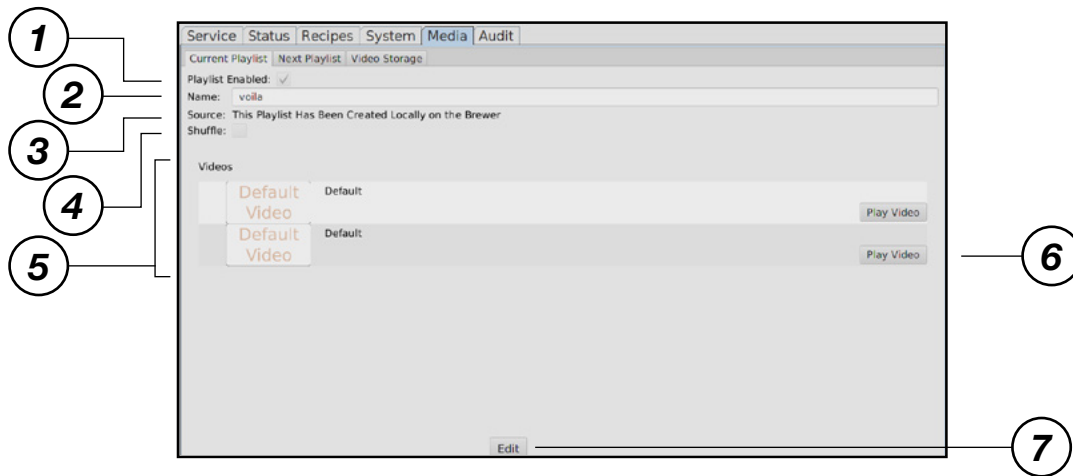

1. This checkbox is used to enable the current playlist.
2. This field is used to change the name of the playlist.
3. The source indicates where the playlist comes from. Personalized videos can be added with **Sophia – Global Management System** (available only with a cellular modem connection and a valid license).
4. This checkbox is used to play videos in a random order. If the box is not checked, videos will be playing in the order they are listed in the current playlist.
5. List of videos selected for the current playlist.
6. This button is used to see a preview of the video.
7. Press on the "Edit" button to apply any changes on this sub tab. A "Save" button will appear. Use it to save any changes to the playlist.

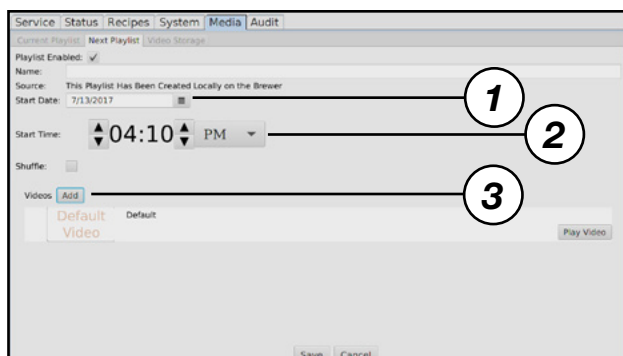

6.7.2 Next Playlist Sub Tab



This sub tab is used to prepare the next playlist and schedule it to become the current playlist at a specific time. Parameters are the same as in the Current Playlist sub tab. However, a start date and time must be set.

1. Set the start date using the calendar.
2. Use the arrows to set the start time of the playlist.
3. Add videos to the playlist from the Video Storage.

6.7.3 Video Storage Sub Tab


This sub tab contains the library of all videos downloaded on the brewer. Use **Sophia – Global Management System** to upload new content on the brewer (license required).

Video preview

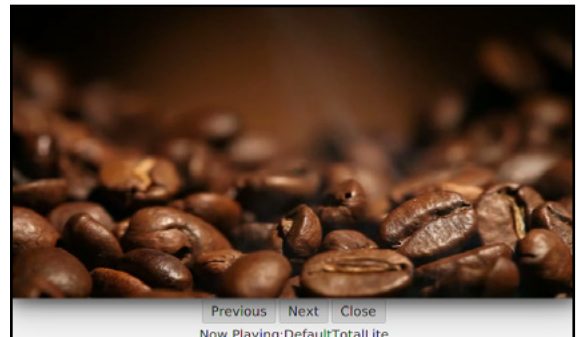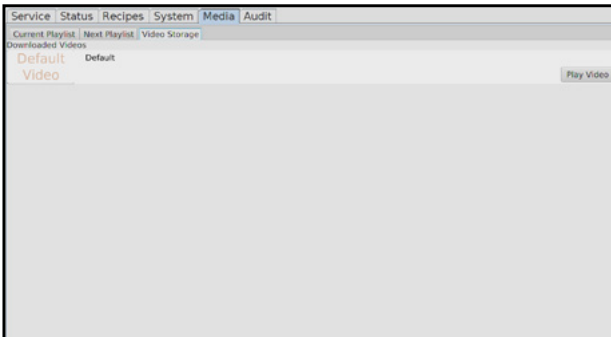

6.8 Audit Tab

To access this screen, tap in order on the top left, bottom left and bottom right corners of the screen (see section 6) and select the Audit tab.

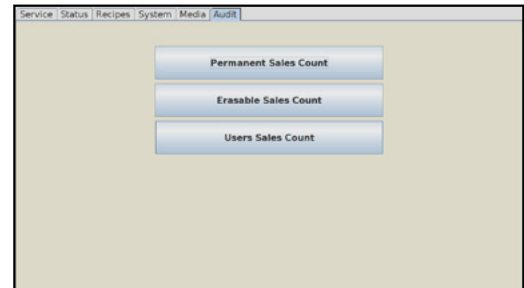

6.8.1 Permanent Sales Count

This counter records the quantity of drinks sold since the machine has been manufactured (or since the last flash card replacement).

Products	Sales			Free			Total
	Small	Medium	Large	Small	Medium	Large	
Coffee 1	0	0	0	0	0	0	0
Coffee 2	0	0	0	0	0	0	0
Coffee 3	0	0	0	0	0	0	0
Coffee MDE	0	0	0	0	0	0	0
Vanilla Coffee	0	0	0	0	0	0	0
Vanilla Decaf	0	0	0	0	0	0	0
Vanilla Choc	0	0	0	0	0	0	0
Vanilla Choc Coffee	0	0	0	0	0	0	0
Choco Latte	0	0	0	0	0	0	0
Vanilla Choc Latte	0	0	0	0	0	0	0
Energy Shot	0	0	0	0	0	0	0
Hot Shot Blend	0	0	0	0	0	0	0
Long Espresso	0	0	0	0	0	0	0
Cappuccino	0	0	0	0	0	0	0
Latte	0	0	0	0	0	0	0
Hot Water	0	0	0	0	0	0	0
Subtotal	0	0	0	0	0	0	0
Total Sales	0	0	0	0	0	0	0
Total Free Vends	0	0	0	0	0	0	0
Total Vends	0	0	0	0	0	0	0

6.8.2 Erasable Sales Count

This counter records the quantity of drinks sold since the last time the counters have been erased. It also records the total sales, free vends and vends in cash value.

To reset the Erasable Sales Count, press on the "Erase Counter" button.

Products	Sales			Free			Total
	Small	Medium	Large	Small	Medium	Large	
Coffee 1	0	0	0	0	0	0	0
Coffee 2	0	0	0	0	0	0	0
Coffee 3	0	0	0	0	0	0	0
Coffee MDE	0	0	0	0	0	0	0
Vanilla Coffee	0	0	0	0	0	0	0
Vanilla Decaf	0	0	0	0	0	0	0
Vanilla Choc	0	0	0	0	0	0	0
Vanilla Choc Coffee	0	0	0	0	0	0	0
Choco Latte	0	0	0	0	0	0	0
Vanilla Choc Latte	0	0	0	0	0	0	0
Energy Shot	0	0	0	0	0	0	0
Hot Shot Blend	0	0	0	0	0	0	0
Long Espresso	0	0	0	0	0	0	0
Cappuccino	0	0	0	0	0	0	0
Latte	0	0	0	0	0	0	0
Hot Water	0	0	0	0	0	0	0
Subtotal	0	0	0	0	0	0	0
Total Sales	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
Total Free Vends	0	0	0	0	0	0	0
Total Vends	0	0	0	0	0	0	0
Cash value	\$0.00						

6.9 General Reset to Factory Settings

Resetting the brewer back to factory settings will erase all personalized parameters. Only the Audit tab will remain unchanged to keep the brewer's sales counters intact.

To perform a general reset of the brewer, access Service mode by tapping in order on the top left, bottom left and bottom right corners of the screen (see section 6). Then, press eight (8) seconds in the top right corner of the screen and follow the instructions on the screen.



See section 6.6.1 to reset System 1 and System 2 sub tabs back to factory settings without affecting the recipes.





See section 6.6.1 to reset all recipes back to factory settings (Information and Liquids & Ingr. sub tabs).

7 CLEANING AND SANITIZING

7.1 "Auto Rinse" Button

To perform a rinse, access the Service mode by tapping in order on the top left, bottom left and bottom right corners of the screen (see section 6), then press the "Auto Rinse" button and follow the instructions on the screen.

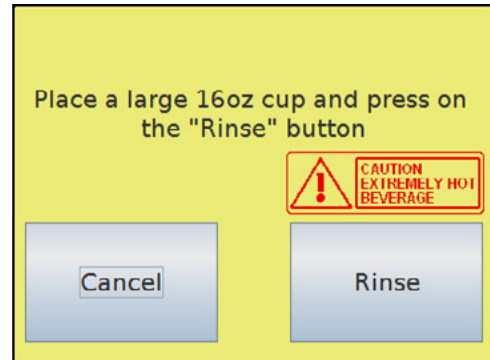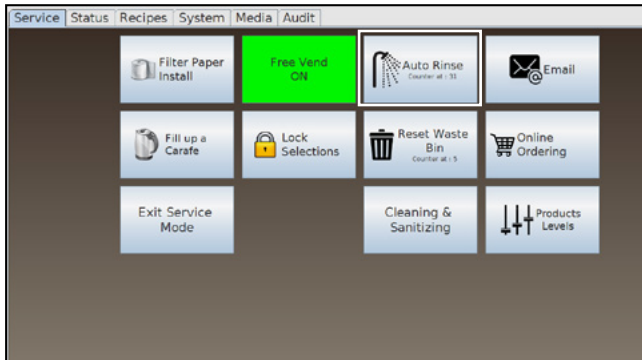


Make sure to place a container large enough (size will be specified on the screen). BE CAREFUL! Water is VERY HOT!

7.2 "Cleaning & Sanitizing" Button

This button is used to clean and sanitize the brew group and the grinder using the appropriate products. Regular sanitation treatments of the brew group assembly prevent residue from affecting the vacuum in the mechanism and altering the taste of the beverages.

Cafection highly recommends using Urnex products (Sani-Pure™, Tabz™ tablets and Grindz™ tablets). Select the adequate option and follow the instructions displayed. Refer to the products' label for details.

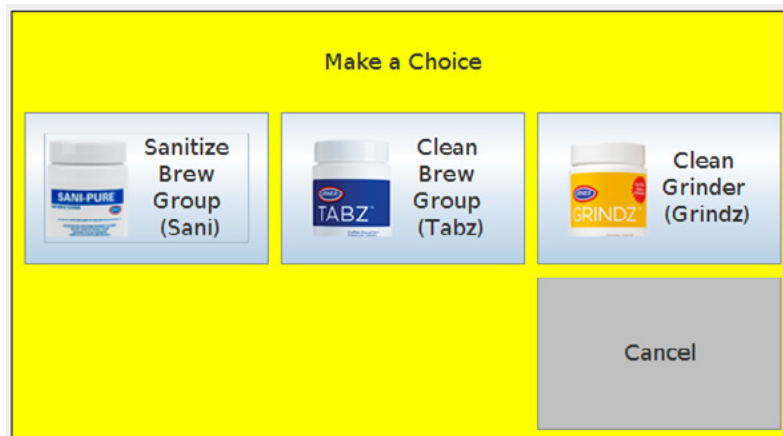

7.3 Cleaning and Sanitizing Instructions

It is important to clean and sanitize the machine on a regular basis. In order to maintain the highest beverage quality and to ensure the customers' safety, all parts in contact with food must be cleaned and sanitized regularly. Hands must be washed before handling any parts or other commodities such as cups and stirrers.

Cleaning and sanitizing should be done in separate phases as prescribed by health regulations and hygiene standards of the industry.

Cleaning: Remove any visible soil, stains or impurities, including food soils, oil or mineral deposits that could alter the beverage taste and quality.

Sanitizing: Sanitizing ensures the customers' health safety by killing bacteria remaining on the surfaces after cleaning.

There are two (2) sanitation methods:

1. Chemical antibacterial treatment.
2. Hot water treatment (between 170 °F and 212 °F).



Always unplug the unit before cleaning the machine. DO NOT spray water on any electrical parts.

For the sanitation process to work effectively, the parts must be cleaned and free of visible soil before sanitizing them. The sanitized parts must then be completely rinsed and air dried. Wiping the parts with towels or cloths might lead to recontamination of sanitized food-contact surfaces.

Frequency

Two (2) important variables need to be considered when evaluating the cleaning and sanitizing frequency:

- Product consumption.
- Water quality.



The expected customer usage varies from one location to another. It is therefore recommended to follow the cycle counts in order to prevent omissions. It is also recommended to verify each part listed in this section upon each service visit and clean them as needed.

7.4 Recommended Cleaning Tools

In order to perform the cleaning procedure effectively, Cafection recommends having at least the following tools on hands:

- Bucket.
- Small brush for tubes and nozzles, suitable for food-contact surfaces and hot water (140°F - 170°F).
- Brush for coffee grounds, suitable for food-contact surfaces.
- Disposable towels, wet-strength and lint-free.
- Mild non-abrasive detergent for exterior cleaning.
- Urn cleaner for brew groups and grinders. (Sani-Pure™, Tabz™ tablets and Grindz™ tablets)
- Urnex cleaning products for deep cleaning (VENDZ™, SPRAYZ™)
- Spare parts.

7.5 Cleaning and Sanitizing Schedule

The cleaning schedule and instructions outlined in this manual must be followed to honor the warranty, ensure consistent product quality and maintain a high level of health safety.



All parts must be visually inspected upon each service visit and cleaned as needed.

	Daily	Weekly	Monthly	Quarterly	Details
EXTERIOR					
Unit & Cabinet	<i>Cleaning</i>				<i>As needed</i>
Touch Screen	<i>Cleaning</i>				<i>As needed</i>
Drip Tray	<i>Cleaning</i>				<i>As needed</i>
Waste Bin	<i>Inspection</i>				<i>As needed</i>
INTERIOR / FOOD-CONTACT PARTS					
Bean Hopper		<i>Inspection</i>	<i>Cleaning</i>		<i>1,000 cycles</i>
Soluble Canisters		<i>Inspection</i>	<i>Cleaning</i>		<i>1,000 cycles</i>
Soluble Whipper		<i>Cleaning</i>			<i>200 cycles</i>
Coffee Chute		<i>Inspection</i>	<i>Cleaning</i>		<i>1,000 cycles</i>
Brew Chamber		<i>Sanitizing</i>			<i>200 cycles</i>
Brew Group		<i>Sanitizing</i>	<i>Cleaning</i>	<i>Treatment</i>	<i>1,000 cycles</i>
Fan	<i>Inspection</i>	<i>Cleaning</i>			<i>As needed</i>
Coffee Funnel			<i>Cleaning</i>		<i>1,000 cycles</i>



These recommendations are based on 1,000 monthly cycles, using medium roast coffee and superior water quality. They need to be adjusted if recipes' settings, coffee blend strength or water quality are different.

7.6 Overall Cleaning

The brewer and its area must be clean and tidy at all time. Both inside and outside of the machine must be inspected upon each service visit and cleaned when needed. Make sure the unit is clean, safe and functioning after it has been serviced.

See the *Deep Cleaning Reference Guide* for a complete cleaning procedure.

7.7 Exterior Cleaning

Frequency: daily

To minimize scratching and preserve a neat appearance, Cafection recommends using a clean damp sponge or soft cloth. Use a non-abrasive detergent to clean the exterior of the unit and the base cabinet. After removing all food soils, thoroughly dry with a clean, soft cloth.

Non food-contact parts to be verified and cleaned:

- Touch screen.
- Drip tray.
- Waste bin.
- Plastic top lid.
- Cabinet (optional) or counter.
- Metal surfaces.
- Plastic door.



Parts are NOT dishwasher safe.

7.7.1 Touch Screen

Frequency: daily or as needed



Use a 100% cotton soft cloth only.

7.7.2 Drip Tray

Frequency: daily or as needed

The drip tray is not connected to a drain. Therefore, it should be inspected and emptied periodically.



WARNING! Drip tray may be full of HOT liquid.

To remove the drip tray, lift it gently to avoid spilling and pull it out from its bracket. Rinse the drip tray and dry it with a clean dry cloth. Reinstall the drip tray and make sure it is stable and leveled. See section 4.6 reference drawings.

7.7.3 Waste Bin

Frequency: daily or every 40 cycles

After each coffee cycle, the spent grounds and used filter paper are automatically discarded into the waste bin. To prevent the bin from overflowing, an automatic function disables coffee-based beverages and displays a message on the screen.

Default setting = 40
Maximum setting = 400
Minimum setting = 0



When using the internal waste bin provided with the unit, Cafection recommends setting the counter to a maximum of 40 cycles using standard 8, 10 and 12 oz cups. If the setting is too high, the wasted filter paper could jam in the brew group and damages may occur.



Setting the maximum counter to zero (0) disables the automatic function and may cause an overflow issue if the waste bin is full.

The equipment will not dispense coffee beverages until the bin is emptied and the counter is reset. The counter settings can be adjusted in accordance to the size of the waste bin in the System 1 sub tab, under the System tab in Service mode (see section 6.6.1).

How to empty the cabinet's waste bin

1. Open the cabinet's door, below the brewer.
2. Open the brewer's door and remove the front panel.
3. Cut the filter paper 4" below the brew group with scissors or tear gently. **DO NOT YANK ON THE PAPER!**
4. Remove the filled garbage bag from the waste bin and replace it with a new one.
5. Reinstall the front panel and close the doors.
6. Access Service mode and press the "Reset Waste Bin" button.

How to empty the brewer's internal waste bin

1. Open the brewer's door.
2. Take off the front panel.
3. Cut the filter paper 4" below the brew group with scissors or tear gently. **DO NOT YANK ON THE PAPER!**
4. Disengage the spout so there is room to pull the waste bin out of the machine.
5. Remove the internal waste bin, empty it and replace it inside the machine.
6. Reinstall the front panel and the spout, then close the door.
7. Access Service mode and press the "Reset Waste Bin" button.



It is very important not to yank on the filter paper. Doing so may result in a malfunction of the machine.

7.8 Interior Parts Cleaning & Sanitizing

For food safety reasons, do not use soap or detergent to clean the inside of the brewer. Use hot water or chemical products recommended by the manufacturer (VENDZ™, SPRAYZ™). Wiping with towels or cloths can recontaminate sanitized food-contact surfaces. Therefore, it is recommended to air dry completely all sanitized food-contact surfaces before reinstalling them in the machine.

Brush away coffee grounds and particles inside the brewer using the brush for coffee grounds and a small dust pan, then clean the inside with hot water.

Interior parts to be cleaned:


- Bean hopper.
- Bean hopper funnel.
- Coffee chute.
- Soluble canisters.
- Soluble whipper assembly.
- Brew group assembly.
- Fans.

7.8.1 Bean Hopper

Frequency: monthly or every 1,000 cycles

It is recommended to remove, empty and clean the hopper every month to avoid coffee oil and soils to accumulate on the walls of the hopper and alter the quality of the beverages.

1. Open the brewer's door.
2. Pull down the bean hopper retaining pin.
3. At the same time, pull the bean hopper forward.
4. Disassemble the bean hopper (No tool required).
5. Clean and sanitize under hot water and air dry completely.
6. Repeat steps in reverse order to reinstall.
7. Order a large coffee to ensure that all parts and switches are working properly.

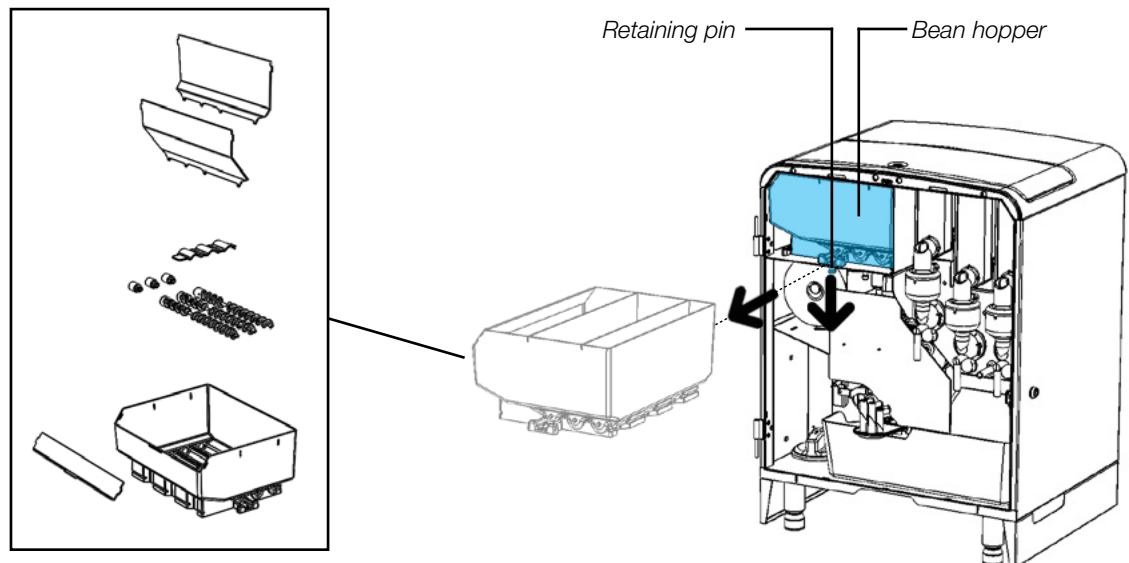

7.8.2 Bean Hopper Funnel

Frequency: monthly or every 1,000 cycles

1. Turn OFF the brewer. Open the brewer's door.
2. Pull down the bean hopper retaining pin.
3. At the same time, pull the bean hopper forward.
4. Unscrew the funnel bracket and remove it with the rubber funnel.
5. Unsnap the two parts (funnel bracket and rubber funnel). Clean and sanitize under hot water. Air dry completely before reinstalling parts.
6. Order a large coffee to ensure that all parts and switches are working properly.



Beans will not fall when removing the hopper. However, this step is easier to complete if the hopper is empty.


7.8.3 Coffee Chute

Frequency: monthly or every 1,000 cycles

1. Turn OFF the brewer. Open the door of the machine and remove the front panel.
2. Pull the coffee chute out from its socket.
3. Clean it thoroughly under hot water.
4. Air dry completely before reinstalling the parts.
5. Reinstall the front panel and close the door.



If the chute is not dry when reinstalled, coffee grounds may stick in the chute.

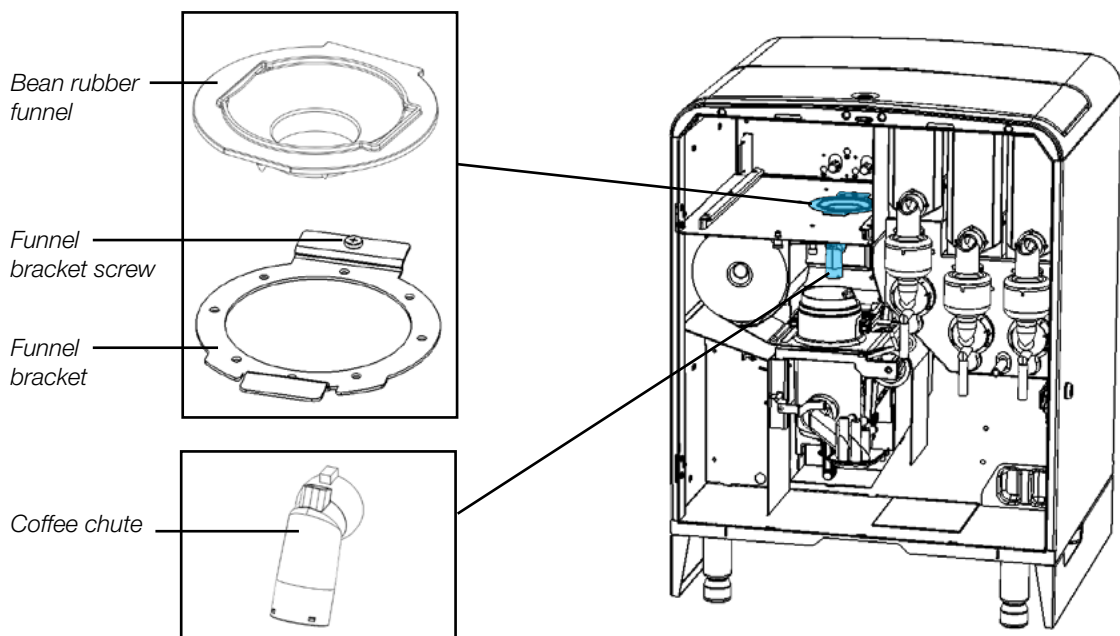


7.8.4 Soluble Canisters

Frequency: monthly or every 1,000 cycles

It is recommended to remove, empty and clean the soluble canisters every month to avoid powder to accumulate on the walls of the canisters and alter the quality of the beverages.

1. Open the brewer's door.
2. Lift the hood and pull the canisters out of the brewer.
3. Clean and sanitize under hot water and air dry completely.
4. Reinstall all parts and reload products in the canisters.
5. Order a large beverage of each soluble to confirm that all parts and switches are working properly.

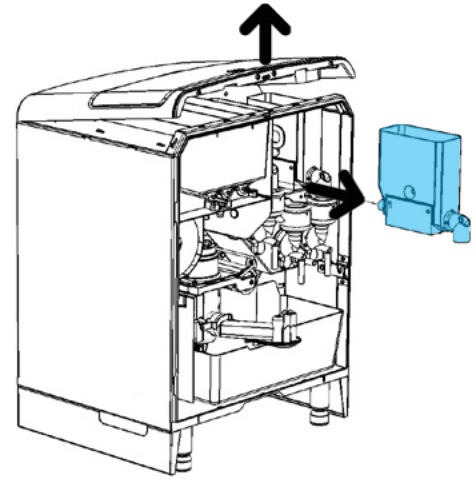


7.8.5 Soluble Whipper Assembly

Frequency: weekly or every 200 cycles

If there is product accumulation, remove the soluble whipper assembly for manual cleaning under hot water.

1. Remove the tube and the plastic elbow from the base.
2. Twist off the whipper base counterclockwise to unlock the whipper chamber.
3. Pull the whipper chamber outward, then remove the whipping disk.
4. Clean all parts and gaskets with hot water. Use a small brush if necessary.
5. Air dry completely.
6. Reinstall all parts in reverse order. Make sure the whipper base is on lock position.
7. Order a large beverage of each soluble to ensure that all parts and switches are working properly.

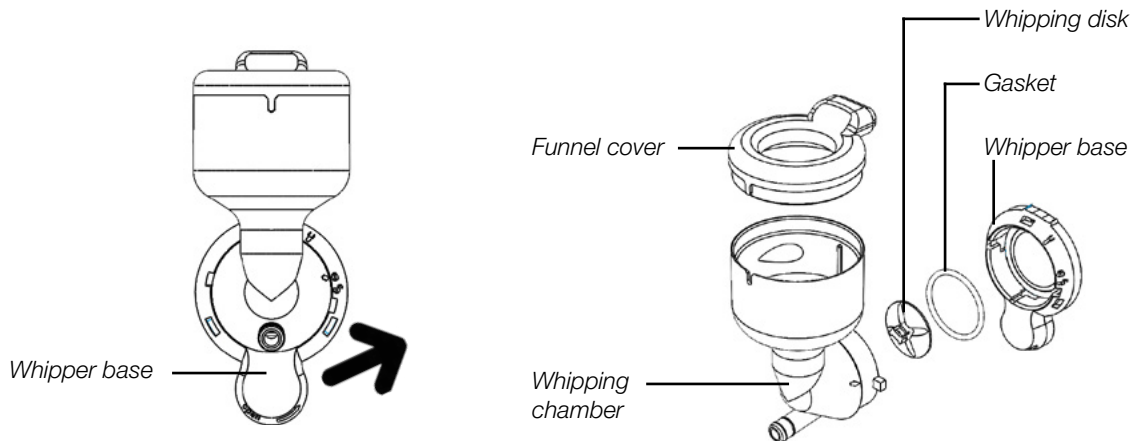


7.8.6 Brew Group

Brew Chamber and Funnel

Frequency: weekly or every 200 cycles

1. Place a large cup or container under the dispensing nozzle to collect the hot rinse water.
2. Perform several rinse cycles (see section 7.1).
3. Remove the brown tube from its support. Remove the brew chamber funnel to expel coffee residue trapped underneath it and rinse it under hot water.
4. Reinstall the funnel and the tube in its support. Make sure the tube is against the wall of the funnel. Water must form a circular motion when being dispensed.
5. Order a large coffee to ensure that the brew chamber is working properly.

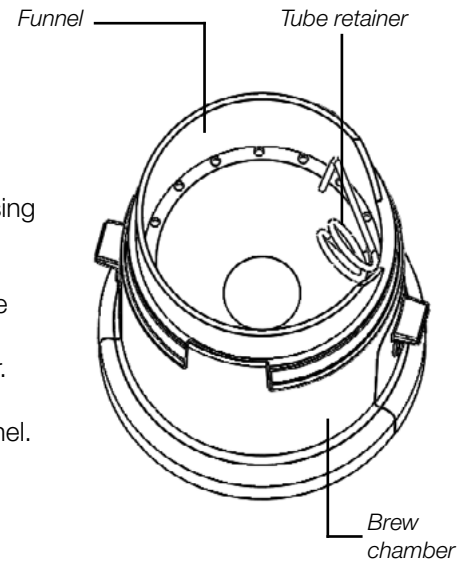

Place a container large enough (size specified on the screen). Water is VERY HOT.



Crush hazard. Handle the brew group cautiously.

Brew Group Assembly

Frequency: monthly or every 1,000 cycles

In order to maintain optimal performance of the brew group assembly, it is recommended to remove it from the unit, clean it and rinse it under hot water.

1. Open the brewer's door and remove the front panel.
2. Cut the filter paper with scissors on both sides of the brew chamber.
3. Remove the waste bin.
4. Remove the black plastic spout from the brew group spillway.
5. Push the locking pin down to release the brew group, then on the right to keep it unlocked. Pull the brew group out.
6. Rinse the brew group thoroughly under hot water to remove visible soil.
7. Remove the funnel from the brew chamber and rinse it thoroughly under hot water.
8. Air dry completely before reinstalling the parts.
9. Order a large coffee to ensure that the brew group is working properly.

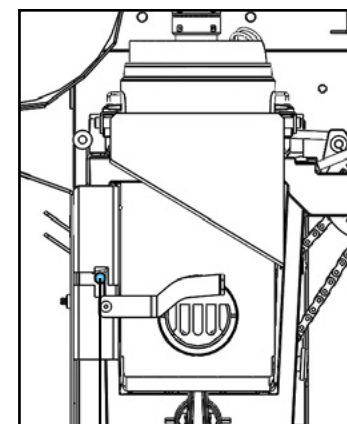


The brew group assembly can also be cleaned using urn cleaner. See section 7.2 for cleaning instructions.

Brew Group Assembly Sanitizing Treatment

Frequency: quarterly or every 5,000 cycles

Regular sanitation treatments of the brew group assembly prevent residues from affecting the vacuum in the mechanism and altering the taste of the beverages.

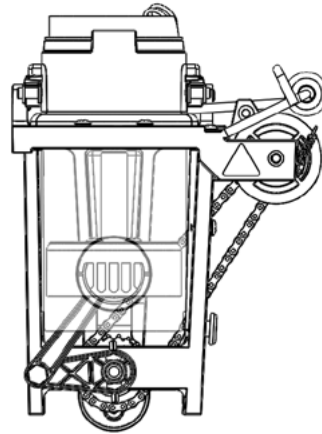


Please refer to the section 7.2 of this manual for sanitizing instructions.

7.8.7 Fans

Frequency: quarterly or as needed

Visually inspect the 2 fans located at the back of the machine.

1. Turn OFF the unit and unplug it to stop the fan.
2. Remove the back panel.
3. Unplug the fan and remove it to access the fan blades (2 bolts).
4. Unplug the blower, remove its guard and remove the fan to access its blades (5 nuts).
5. Wipe the 2 fans clean with a dry disposable towel.
6. Reinstall parts, plug the fans and the machine in, then turn the brewer back ON.

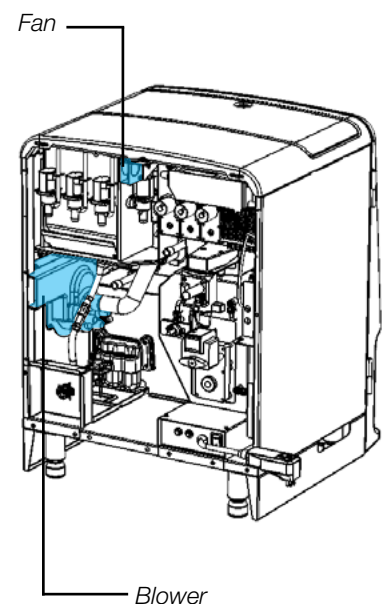

8 PREVENTIVE MAINTENANCE

All important parts of the unit must be maintained as per the preventive maintenance schedule to honor the warranty and to avoid possible defects. Adequate maintenance will extend the life of the coffee machine and deliver a consistent high quality beverage.



The preventive maintenance schedule and instructions below must be followed to honor the warranty.

8.1 Preventive Maintenance (PM) Schedule




All parts must be visually inspected upon each visit and cleaned as needed.

	Inspection	Preventive Maintenance	See Section
Overflow Tray	Weekly	Inspection	8.3
Brew Group Assembly	Monthly	25,000 cycles or annually	8.4
Outlet Valves	Quarterly	10,000 cycles	8.5
Hot Water Tank	Quarterly	60,000 cycles	8.6
Grinder	Quarterly	100,000 cycles	8.7

8.2 Recommended tools for servicing the coffee brewer

- #1 and #2 Phillips screwdrivers
- Flat-head screwdriver
- Adjustable wrench
- Wrench 1/4"
- Drive ratchet socket box 5/16" and 3/8"



8.3 Overflow tray

Inspection: weekly

Preventive maintenance: inspection

It is recommended to verify frequently that there is no water in the overflow tray to detect any flood or leakage. If there is too much liquid in the overflow tray, an error will be displayed on screen, the inlet valve will shut off and the heating element will turn off.

An overflow detected by the brewer can be caused by the following situations:

- Water is boiling in the hot water tank (thermostat error, temperature probe malfunction).
- Water level probes malfunction.
- Mineral deposit accumulation in the hot water tank or on the probes.
- One of the soluble whipping chamber is obstructed.
- The inlet valve stays open.
- The machine moves.
- There is a short circuit on the overflow detection cable.

To verify the overflow tray

1. Open the main door.
2. Remove the waste bin.
3. Gently pull out the overflow tray.






Water may be very hot!

4. Empty the overflow tray if necessary and reinstall parts.



When sliding the overflow tray back in place, make sure it is locked in position.

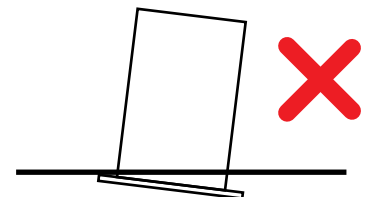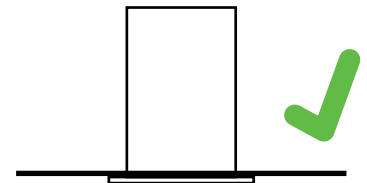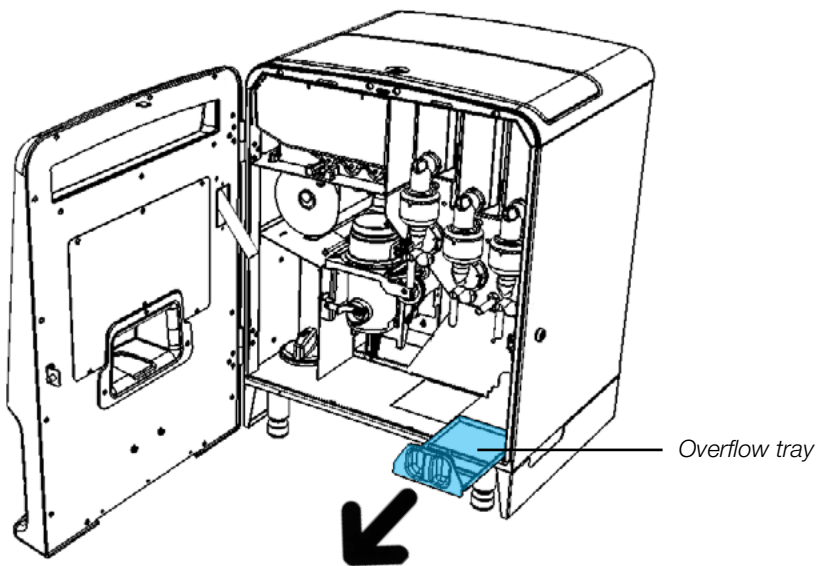

8.4 Brew Group Assembly

Preventive maintenance: yearly or every 25,000 coffee cycles

The brew group is the heart of the equipment and is responsible for the taste of every cup. It needs to be serviced regularly to maintain the quality of the beverages served.

Cafection offers a Brew Group Exchange Program. This program ensures a constant running of the machine by receiving a replacement brew group to use while maintenance is performed on the actual brew group of the unit. Cafection will completely clean and replace all parts requiring maintenance, including the screen and seal, the cylinder and the piston seal.

The cleaned brew group will be returned with a one (1) year warranty on defective parts.


Contact salesorder@caflection.evocagroup.com or 800-561-6162, ext. 311, to order parts or for additional information.

Inspection

Frequency: monthly

The followings are signs that the coffee extraction is not being performed adequately and that the brew group may require preventive maintenance:

- Seal is damaged.
- Air gets into the cylinder from around the piston seal and creates bubbles in the coffee.
- There are coffee grounds in the dispensed coffee.
- Spent coffee grounds remain wet on the filter paper.

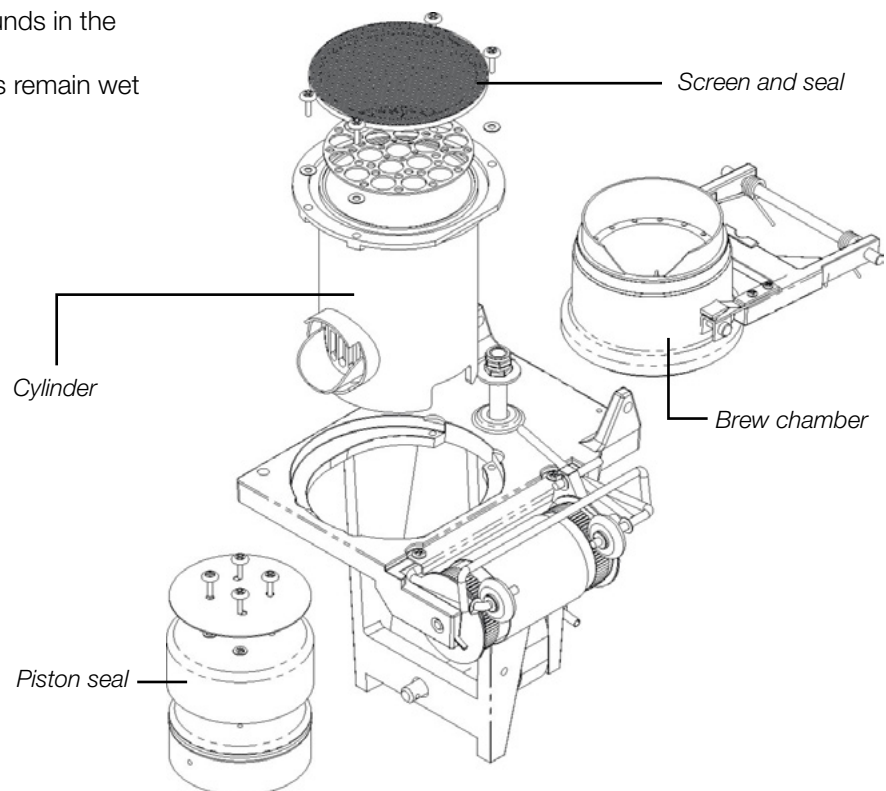

8.5 Outlet Valves

Inspection: quarterly
Preventive maintenance: every 10,000 cycles

To avoid any issue related to mineral deposits, Cafection recommends rebuilding all outlet valves at the same time.


Valve Leakage

Identify the leaking valve, change it or rebuild it. If the leak originates from under the body of the valve or from the tank exit, try changing the conical mounting seal in the first instance.

If the coffee valve is not watertight, water will accumulate in the brew chamber. If it drips all night, the first coffee of the morning will be lukewarm. A leakage will cause water to accumulate in the overflow tray, the flood will be detected and an error message will be displayed on the screen.



Water is VERY HOT!

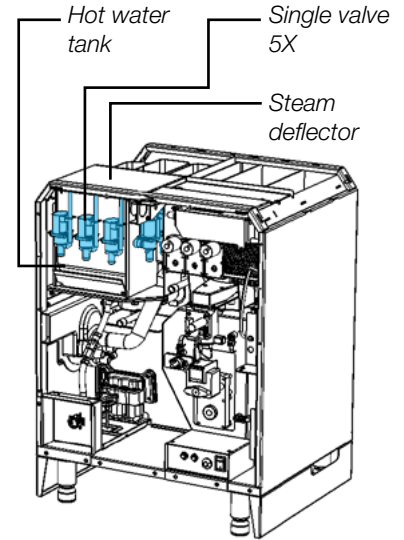

Removing and Installing the Valves



1. Turn OFF the machine and unplug the main power cord.
2. Remove the back panel, the top hood and the steam deflector.
3. Unplug the tank lid's connectors and the valves' connectors (see section 8.5).
4. Completely drain water from the tank (see section 9.1).
5. Remove the tubes from the valves.
6. Remove the hot water tank to access all valves (see section 8.5).
7. Remove the valves. Replace or rebuild them. *Make sure the seal is in place for each valve.
8. Reinstall by repeating the steps in reverse order.



If a water filtration system is installed on the brewer, it is recommended to inspect it on a monthly basis.

For servicing valve #5 (coffee) without removing the hot water tank from the machine.

9. Turn OFF the machine and unplug the main power cord.
10. Completely drain water from the tank (see section 9.1).
11. Unscrew the access door to remove it and access the valve from the front of the brewer.
12. Unplug the connectors and the tubes from the valve.
13. Remove the valves. Replace or rebuild them. *Make sure the seal is in place for each valve.
14. Reinstall by repeating the steps in reverse order.

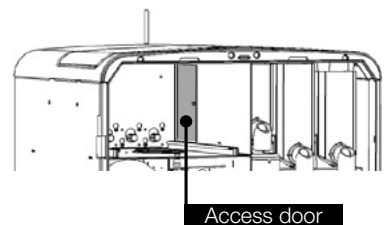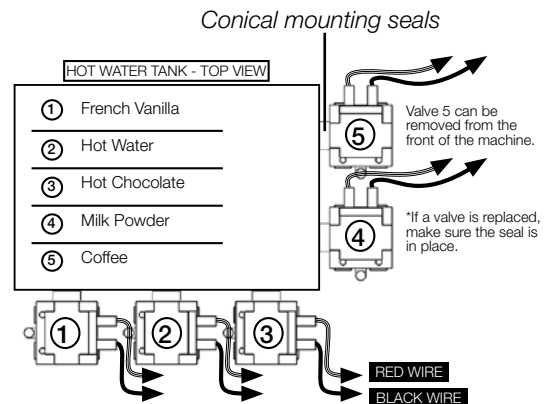

8.6 Hot Water Tank

Inspection: quarterly




Preventive maintenance: every 60,000 cycles

To avoid any issue related to mineral deposits, Cafection recommends having the water tank assembly delimed to remove all scale in the unit. The heating element, probes and sensors may also need to be replaced.



Use a scale remover product such as *Scale Kleen* by Everpure. See the manufacturer's instructions for more details.

1. Turn off the machine. then remove the back panel and the steam deflector.
2. Unplug the tank lid's connectors.
3. Completely drain water from the tank (see section 9.1).
4. Remove the tubes (valves and water tank).
5. Remove the tank.
6. To reinstall, follow steps in reverse order.

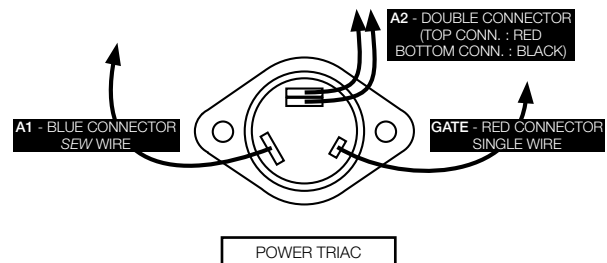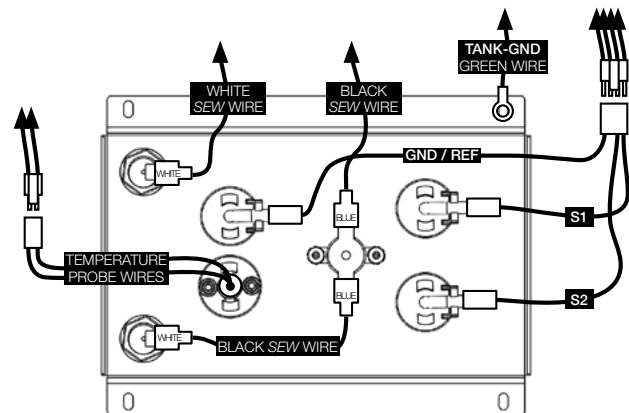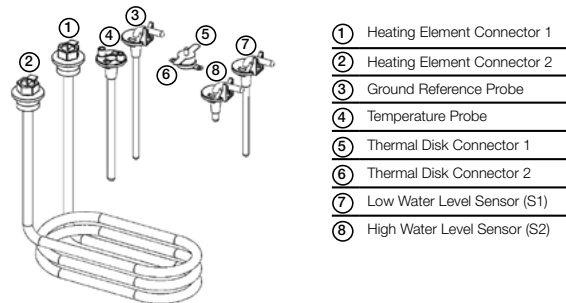

8.7 Grinder


Inspection: quarterly

Preventive maintenance: every 100,000 cycles


Cafection's commercial grade burr grinder ensures perfect coffee grinding.

The ground coffee particles' size playing a key role in the coffee extraction and taste, it is important to change the grinder's burrs in accordance with the preventive maintenance schedule.

Contact salesorder@cafecion.evocagroup.com or 800-561-6162, ext. 311, to order parts or for additional information.

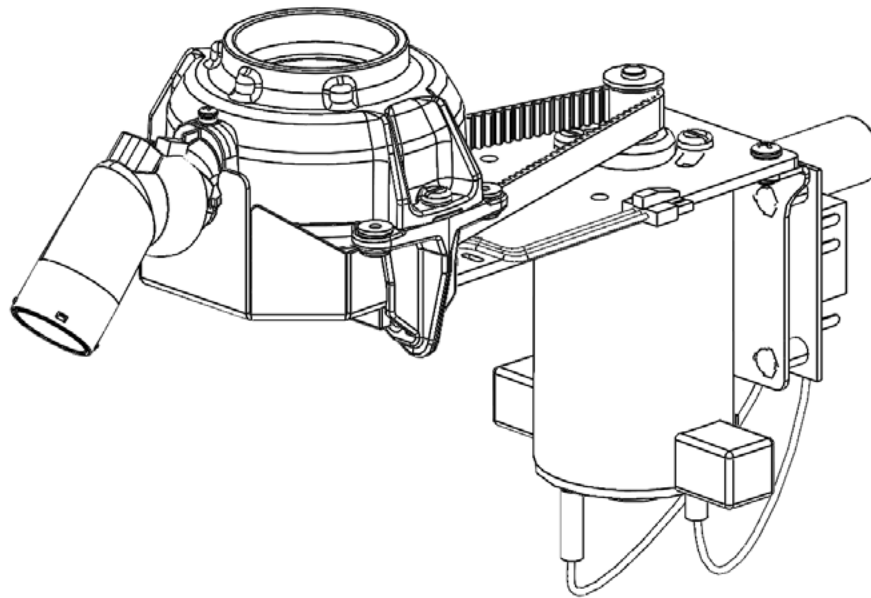

If grinder's top part is removed, align the hook of the plastic part with the top part opening to reinstall.

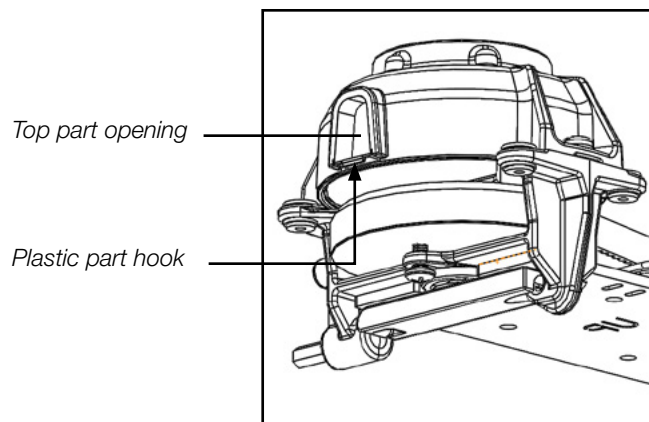

9 PARTS MAINTENANCE

This section covers the servicing of various parts of the unit.

9.1 Hot Water Tank Draining


Cafection recommends allowing 3 hours for the water to cool down prior to emptying the tank. Make sure to have a bucket capable of holding a minimum of 0.8 gallons (3 L) suitable for hot water.

1. Turn off the brewer and unplug it from the electrical outlet.
2. Cut off the main water supply.
3. Open the front door.
4. Locate the drain tube (red plug).
5. Place the tube into the bucket and pull the red plug out.



Water may be hot!

6. Completely drain water from the tank.
7. Reinstall by repeating the steps in reverse order.

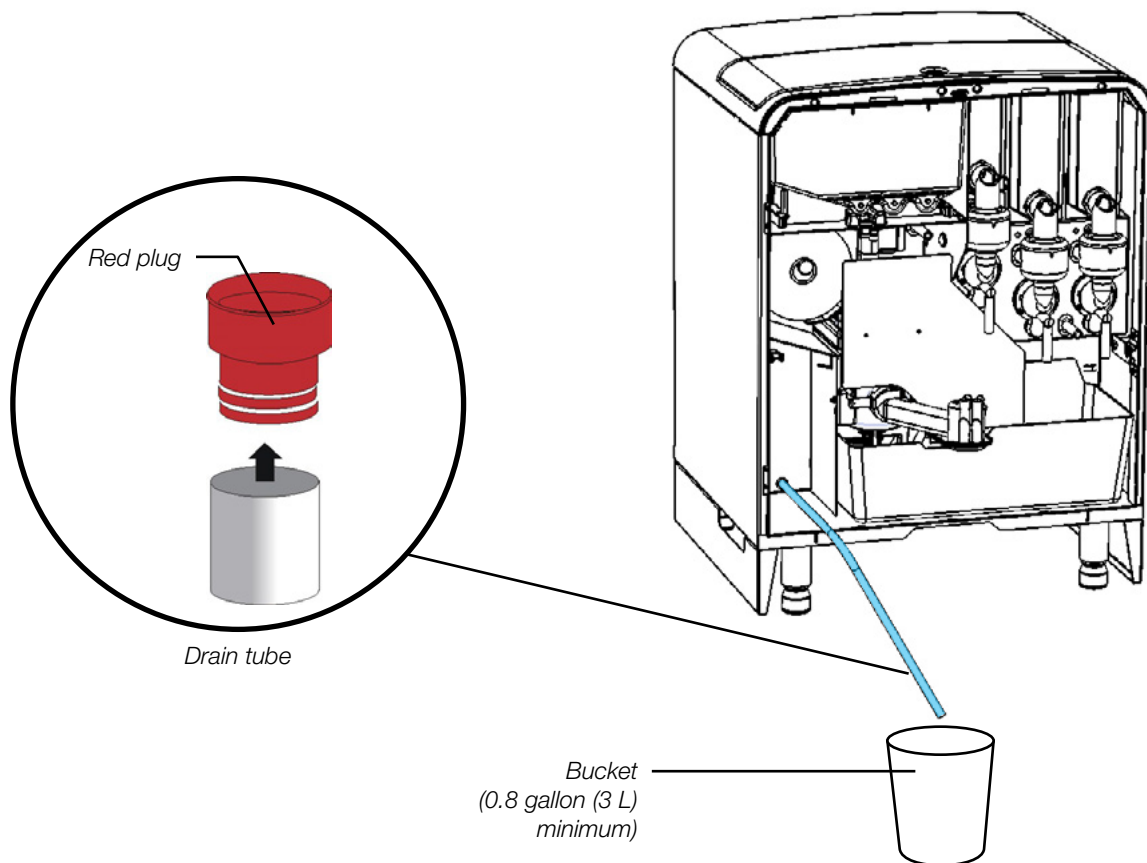

9.2 Shutdown and Storage

If this brewing equipment needs to be stored for an extended period of time, follow this procedure to avoid any risk of damage to the machine.


1. Turn off the unit and unplug it from the power outlet.
2. Completely drain the hot water tank (see section 9.1).
3. Empty the soluble canisters and the bean hopper.
4. Clean all parts of the unit (see section 7).
5. Disconnect the white and the black *SEW* wires from the heating element (see section 8.5).

9.2.1 Storing the Brew Group


It is important to store the brew group properly when it is not installed in the brewer. Always disengage the brew group clutch. To do so, use the provided tool to turn the pin clockwise until the brew chamber lifts up. This action will release the pressure on the screen and seal. The brew group must be stored on its back or its left side.



Do not sit the brew group on its right side (on the wheels and yoke) or straight up. These positions make it unstable and could cause it to fall.

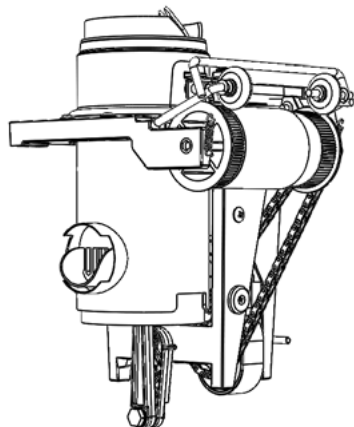



Store the brew group opened and in a stable position.

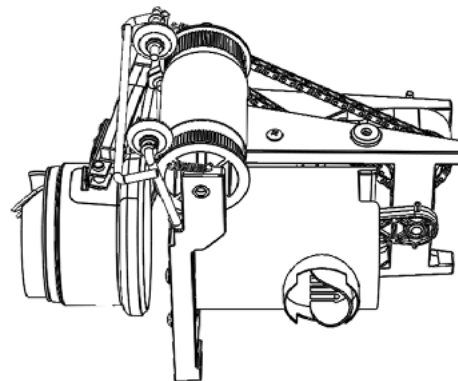

9.3 Brew Group Assembly

Removing the brew group

1. Open the brewer's door.
2. Access Service mode (see section 6).
3. Press on the "Filter Paper Install" button (see section 6.2).
4. Wait for the brew chamber to open. Cut the filter paper with scissors on both sides of the brew chamber.
5. Remove the coffee spout.
6. Support the brew group assembly by holding the aluminum frame on the right side of the brew group assembly.
7. With the left hand, push the locking pin down, then right.
8. Pull the brew group assembly straight outward.

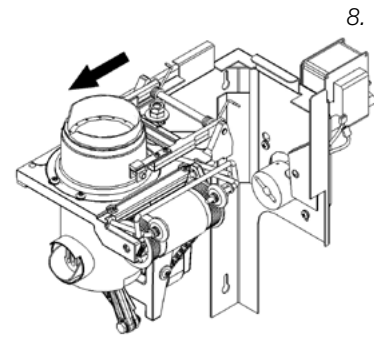



Installing the brew group

1. Make sure that the dog drive pin in the back of the brew group is at 1 o'clock.
2. Align the left edge of the brew group on the left bracket support.
3. Push the brew group back completely into the dog drive motor.
4. Push the brew group's retaining pin to the left, then up.



To clean the brew group, see section 7.8.6.

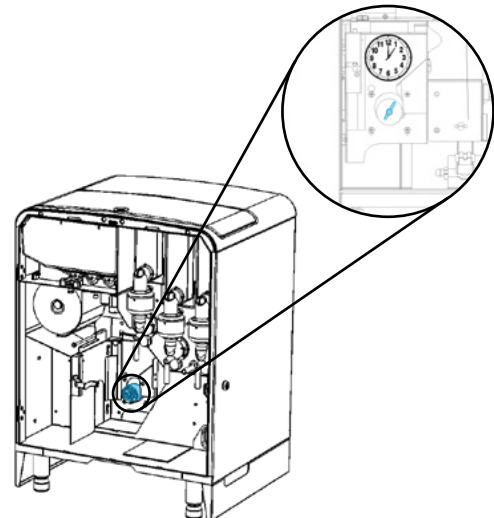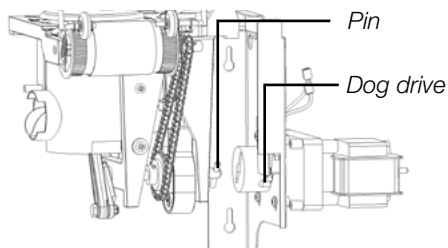

9.4 Main Board & Computer

Like any electronic main board, the one in this brewer is very sensitive to power surges inside buildings. If an issue persists after replacing the main board, verify the power source. Use the necessary precautions for handling static sensitive devices.

Removing



1. Turn off the machine and unplug the main cord.
2. Remove the back panel.
3. Unplug the connections on the main board or the computer clockwise from the top left corner (see annex 3).
4. Unscrew the 2 screws keeping the main board support or the computer support in place.
5. Pull the main board support or the computer support outward the unit.
6. Unscrew the 6 screws keeping the main board on its support or the 4 screws keeping the computer on its support.
7. Remove the main board or computer.
8. To reinstall, follow the steps in reverse order.



All cables must be reinstalled in the correct order and direction before turning the power on. Otherwise, the board will fail and it may be damaged.



To reinstall, slide the support on the back pins and lock the support with the support screws.

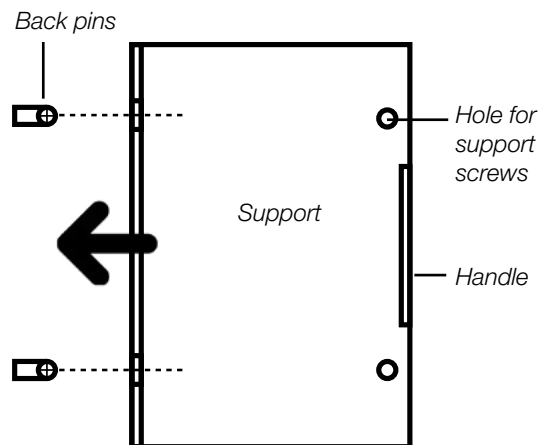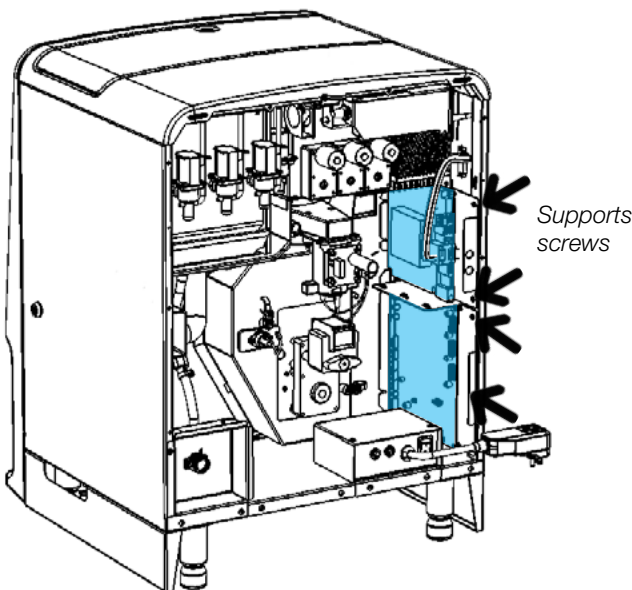

9.5 Flash Card Replacement

The flash card can be replaced in order to improve and update the machine's software. The flash card holds the GUI software (Graphical User Interface). All drink recipes, sales counters and other settings are stored in the flash card.






Before beginning, turn power OFF.

To remove the flash card:


1. Turn OFF the coffee brewer.
2. Open the main door and remove the bean hopper.
3. Pull the flash card outward.

To install the flash card:

1. Make sure the colored side of the card faces the right.
2. Insert the flash card and push it GENTLY to make sure no damage is done (slide it on top and bottom tracks).
3. Reinstall the bean hopper and close the door.
4. Turn power back ON.
5. At the startup, the screen will indicate the flash card version.

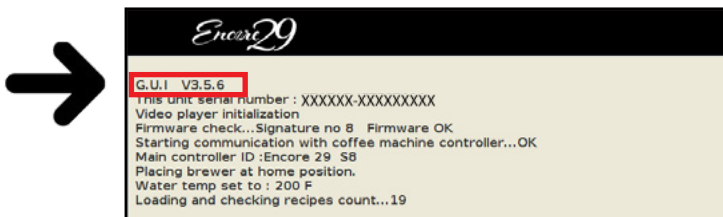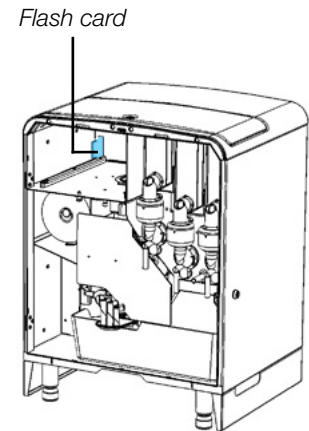

Enter the serial number of the brewer under the Admin tab to ensure proper internet network communication (see section 6.6.6).

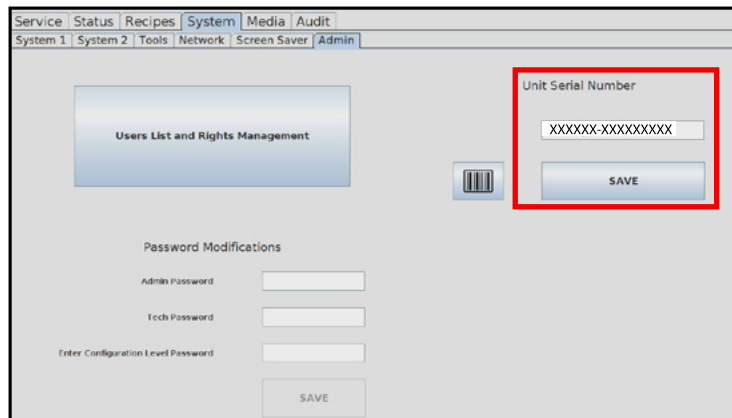

9.6 Grinder

9.6.1 Grinder issue (grinder jam)

When an unusual performance of the grinder is detected, the machine tries to automatically recover itself by pulsing the grinder (max. 20 pulses) and will finish the beverage preparation. If the automatic recovery fails, the "Grinder Issue" error message appears on the selection screen and all coffee-based beverages are disabled.


The grinder may slow down or jam for the following causes:

- Coffee chute is jammed
 - A brew group overflow prevents the brew group from properly discard used ground coffee after a coffee preparation. The grinder cannot expel ground coffee and jams. The indirect cause can be a full waste bin, an empty filter paper roll, the hot water tube alignment in the brew group funnel or the ground coffee chute alignment.
1. In any of the cases above, clean parts if necessary and rectify the problematic situation.
 2. Access the "Tools" tab in Service Mode and select the "Components Manual Control" button. Use the "Coffee Grinder" button to manually pulse the grinder (max. 20 pulses).
 - Grinder empties and work properly : make sure to leave the machine clean.
 - Grinder is still jammed and the motor seems to work, refer to 9.6.2.
 3. Turn the power OFF. Access the back of the machine and verify the fuse. If the fuse has blown, only change it for one of the same rate (indicated on the fuse case).




Position the water tube and coffee funnel to ensure a proper water swirl into the funnel.

Correctly align the coffee chute towards the hole of the funnel.

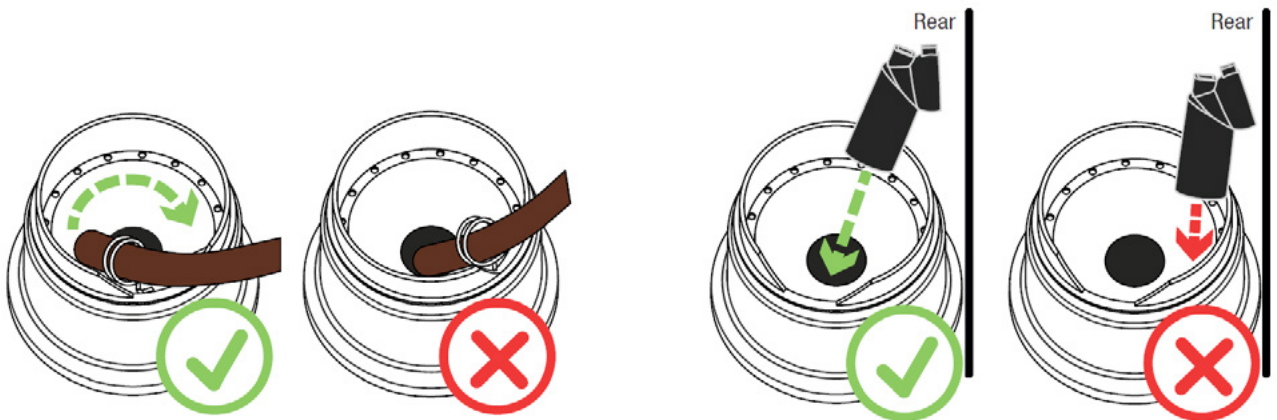

9.6.2 Disassembling the coffee grinder




1. Unplug the main power cord.
2. Open the brewer's door and remove the ground coffee chute.
3. Remove the back panel.
4. Unplug the grinder's wires and unscrew the 4 nuts securing the coffee grinder with a 5/16" socket.
5. Pull out the coffee grinder assembly.
6. Unscrew and remove the metal guard and the plastic chute adaptor.
7. Unscrew the 2 screws on the sides of the grinder's top part and remove the top part.
8. Sweep the particles from the blades with a brush.
9. Follow steps in reverse order to reinstall the grinder.

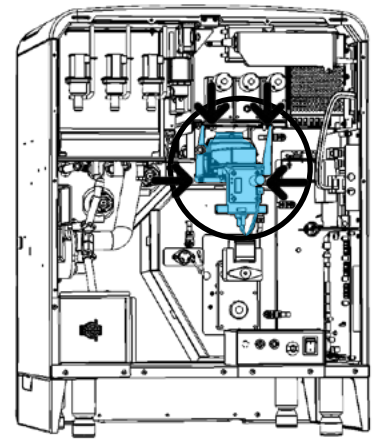

Use the milling adjustment screw to adjust the grind size.



If grinder's top part is removed, align the hook of the plastic part with the top part opening to reinstall.

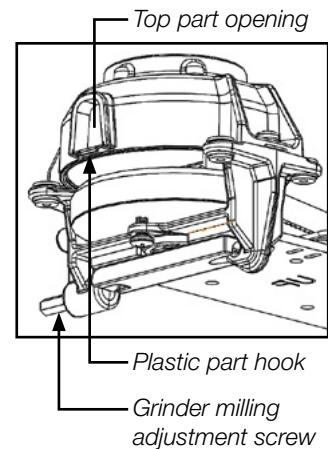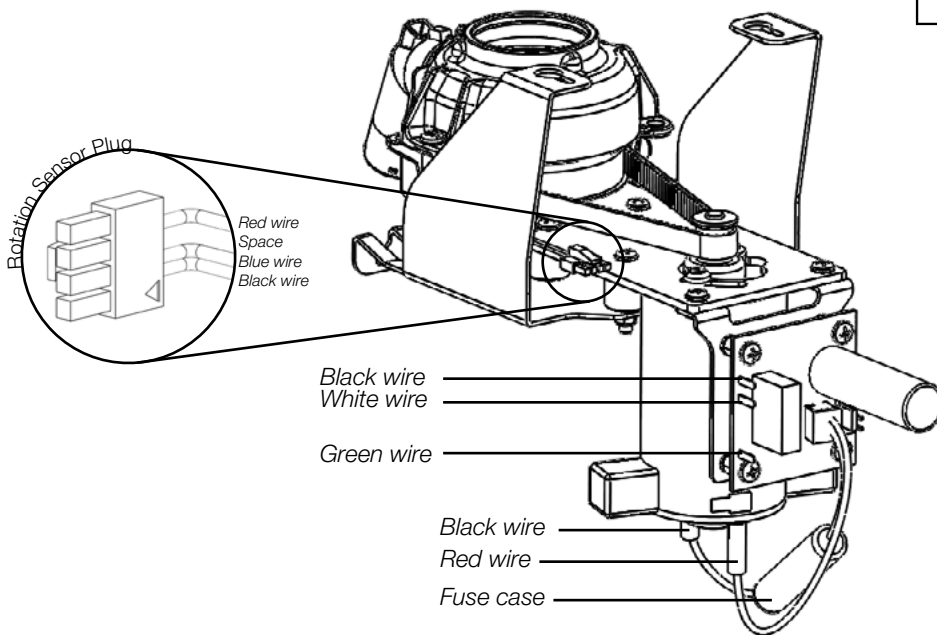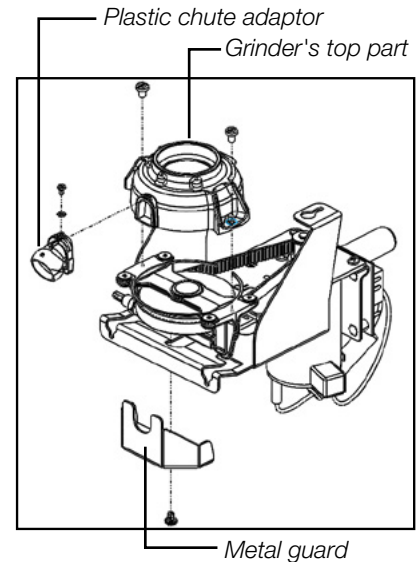

10 TROUBLESHOOTING

There are 2 types of service messages : Warnings and Errors.

Warnings will temporarily disable some features, while errors turn the coffee brewer out of order.

10.1 Warning Messages List

Filter Paper Roll Empty

The unit is out of filter paper. All coffee-based recipes will be temporarily disabled on the selection screen. Only hot water and soluble drinks will be available. Install a new filter paper roll (see section 4.9).



Advanced tech tip: the status of the filter paper sensor can be monitored using the green LED DS34 and 35 on the main board of the machine (see annex 3).

Rinse Required Soon

The number of drinks served has reached the "Rinse at" parameter set in Service mode (see section 6.6.1). All drinks will continue to be dispensed. The warning will be displayed on the screen until a rinse cycle is performed on the machine (see section 7.1).

Waste Bin Full

The number of coffee drinks served has reached the "Waste bin max" parameter set in Service mode (see section 6.6.1). All coffee-based recipes will be temporarily disabled on the selection screen. Only hot water and soluble drinks will be available. Empty the waste bin and reset its counter (see section 6.2).

Grinder Issue

The coffee grinder is jammed or the connection is broken with the grinder's rotation sensor. All coffee drinks have been deactivated. See section 9.6 to service the grinder.

Brew Group Starting Position Switch Error

The brew group failed to detect its starting position. The following parts might be defective:

- Brew group motor.
- Cam switch or pin of the dog drive wheel.
- Brew group starting position switch.

Remove the brew group assembly from the coffee machine to verify if there is a broken parts.



Advanced tech tip: the status of the brew group starting position switch can be monitored using the green LED DS33 on the main board of the machine. At starting position (open contact), the light is off (see annex 3).

Printer Out of Paper

No coupons will be printed, but all drinks will still be dispensed. Place a new paper roll in the printer.

Printer Disconnected

No coupons will be printed, but all drinks will still be dispensed. Check printer communication and printer power cables.

Bill Value Too High, Returning Bill

The bill inserted exceeds the maximum accepted value (\$10). The bill will be returned to the customer.

Not Enough Coins, Returning Bill

The bill inserted exceeds the coin value available in the coin changer. The bill will be returned to the customer.

10.2 Error Messages List

Communication with the Main Board Has Been Lost.

The link between the computer screen and the coffee brewer is broken. The main board of the brewer might be out of power.

- Check the overflow tray. It must be empty and dry.
- Check the 5 A and 15 A circuit breakers located on the back of the unit.
- Check the electrical connections (see annex 3).

Water Temp. Sensor Defective (open contact).

The water tank temperature probe is defective or unplugged from the thermostat (see section 3.8).

Water Temp. Sensor Defective (short circuit).

The water tank temperature probe is defective due to a short circuit (see section 3.8).

Water in the Overflow Tray.

Verify if there is water in the overflow tray and make sure no water is touching the 2 water probe wires.



Advanced tech tip: the status of the water probes can be monitored using the green LED DS30 (see annex 3).

Low Water Level in the Tank.

The water tank failed to fill completely within the prescribed time. The water inlet valve is deactivated for safety reasons.

- Maximum filling time is 4 minutes when the power switch of the coffee brewer has been set to the ON position.
- Maximum filling time is 2 minutes after the first tank fill.

Check the water supply line to ensure that the pressure is adequate (between 20 psi and 80 psi). If the machine uses a waterline filter, it might be worn out and needs to be replaced.

Press on the "Restart Filling" button on the error screen to restart the tank filling process.

Water Tank Not Full. Please Wait While Filling (1 to 3 minutes).

After setting the power switch of the machine to the ON position, this message will be displayed until the water tank is full.


Water Temperature Not High Enough. Please Wait.

The machine will display this message and stop dispensing drinks if the water temperature of the tank drops below the "Warming up (F)" temperature set in Service mode (see section 6.6.1). To disable this feature, set the warming up temperature to 0.

Grinder Issue


The grinder is jammed, broken or fails to work normally due to indirect problem. All coffee based beverages are disabled. See section 9.6 for complete information.

ANNEX 1 WASTE CHUTE POSITION


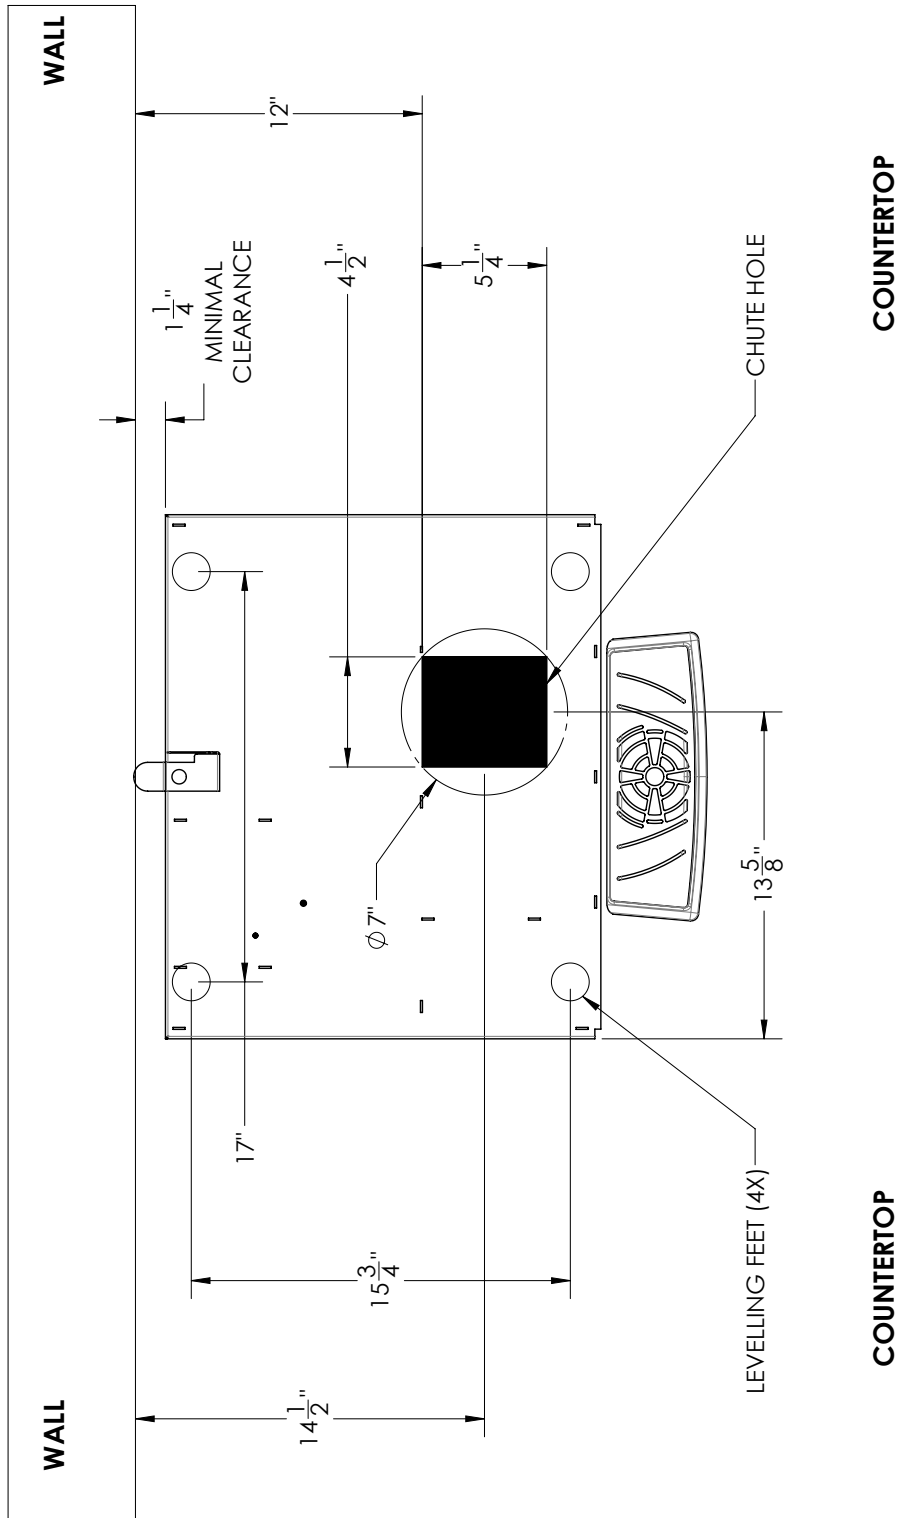



"HOLE EDGES SHOULD BE SEALED WITH SILICONE OR AN APPROPRIATE SEALANT FOR PROTECTION AGAINST WATER DAMAGE"

ANNEX 2 REQUIRED CLEARANCE

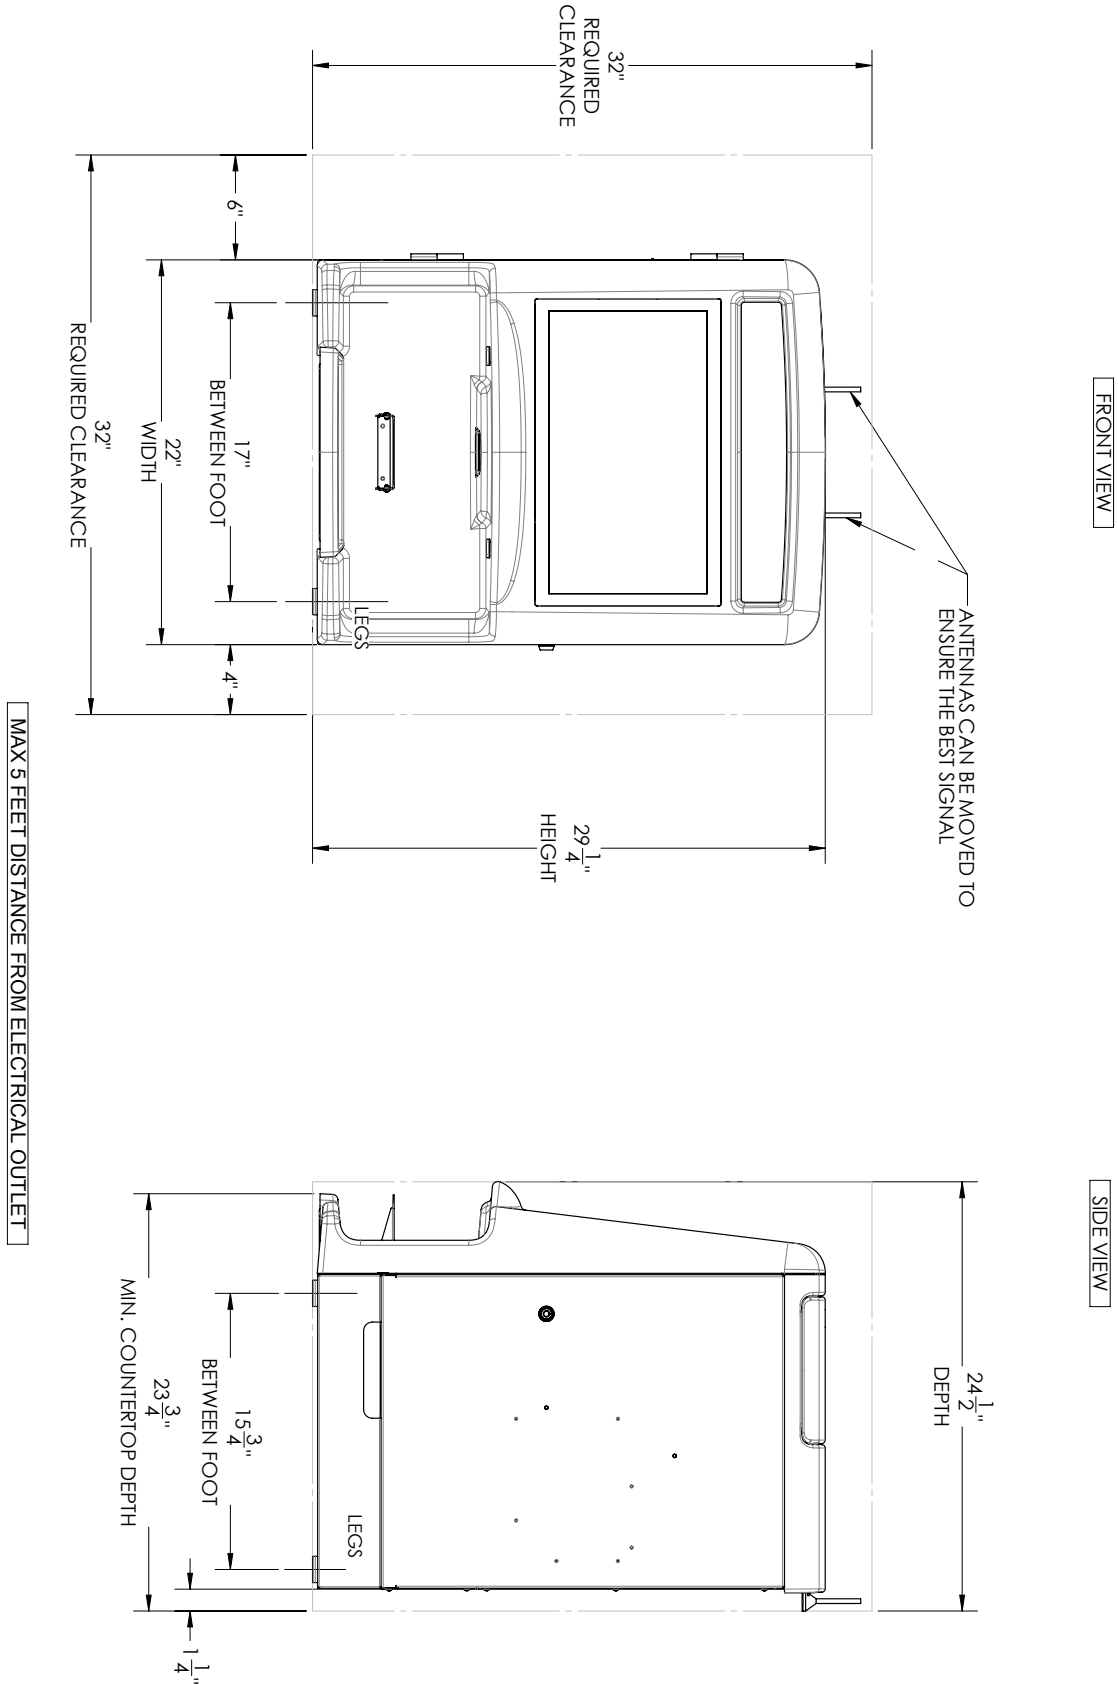

ANNEX 3 MAIN BOARD

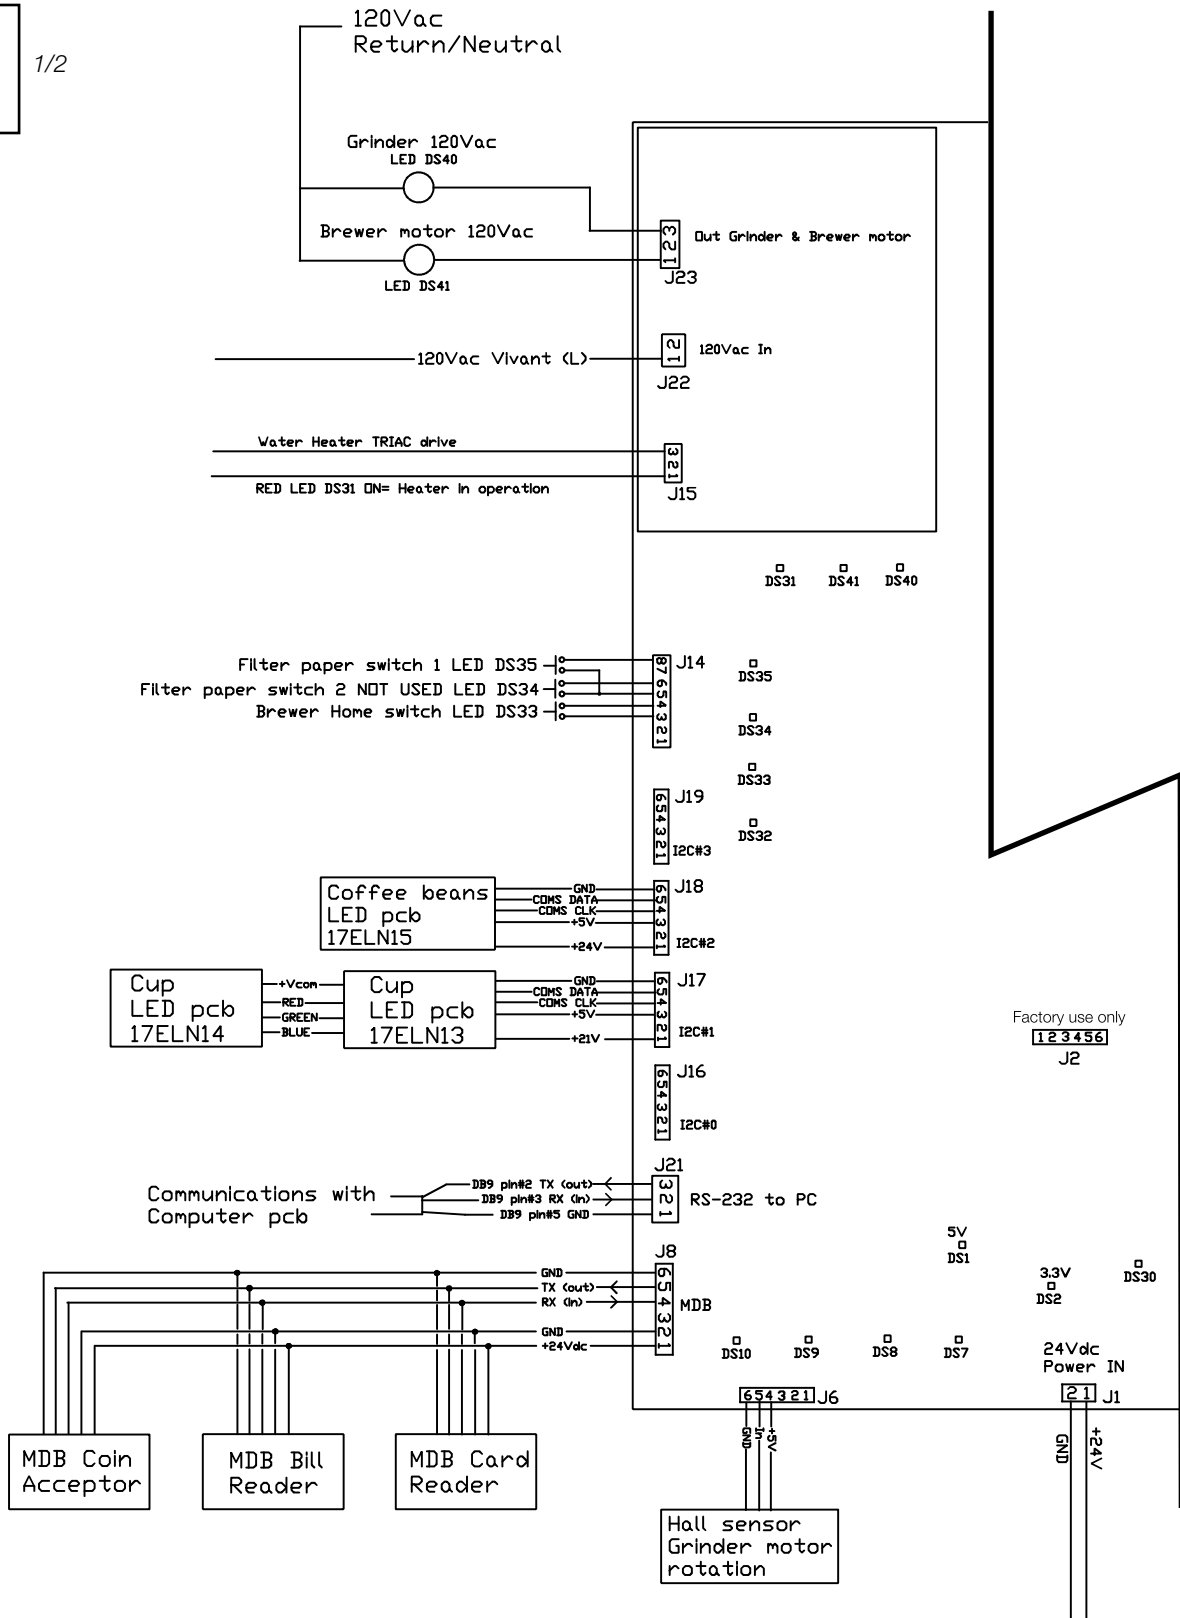

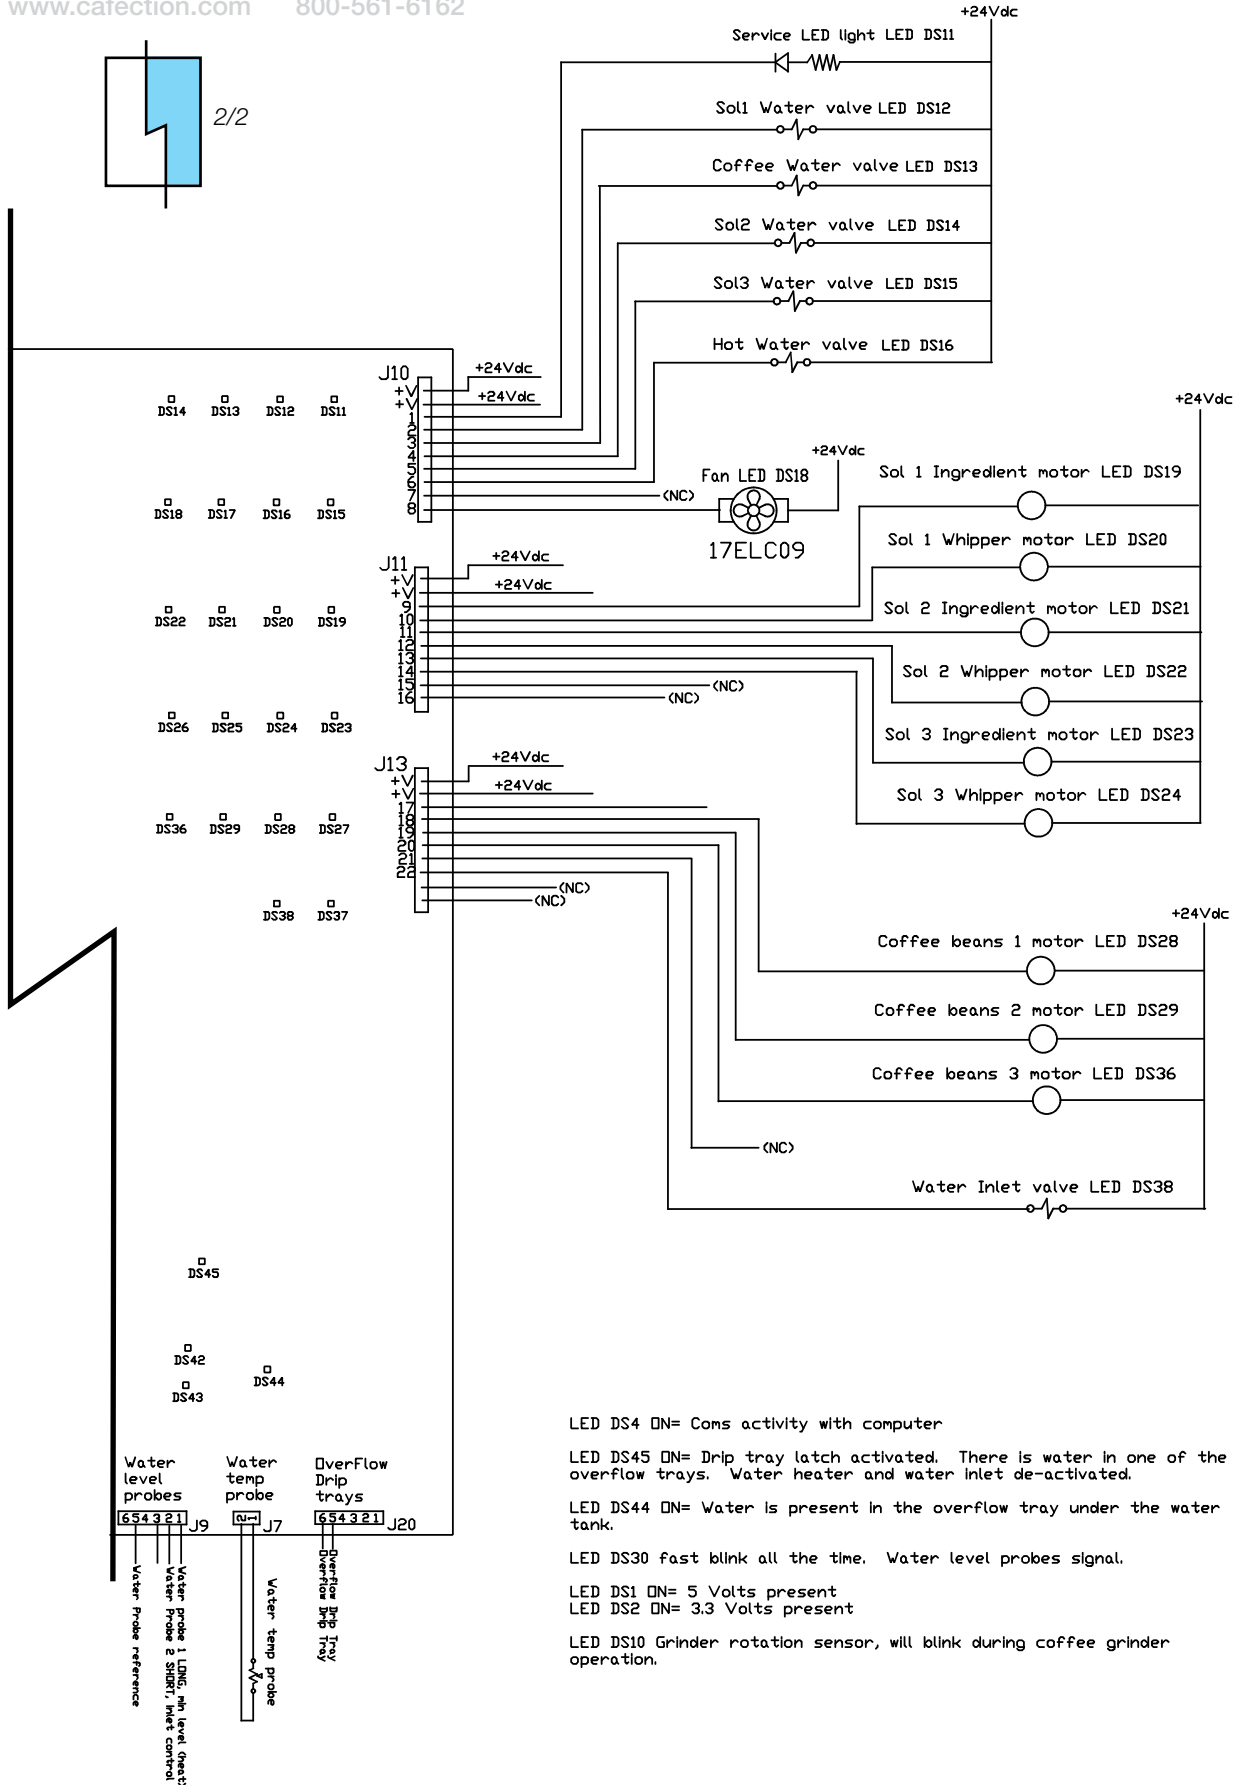

ANNEX 4 FULL MAINTENANCE SCHEDULE

ENCORE Series
ENCORE 29

FULL MAINTENANCE SCHEDULE



All important parts of the unit must be maintained as per the Maintenance Schedule to honor the warranty and to avoid possible defects. Adequate maintenance will extend the life of the coffee machine and deliver a consistent high quality beverage.

PERFORMED BY THE OWNER

DAILY MAINTENANCE

- Fill the solubles canisters & the bean hopper.
- Empty the waste bin.
- Perform a rinse cycle.
- Clean the machine & tidy up surrounding area.
- Empty the bill acceptor & the coin changer.
- Clean the drip tray & its grill.
- Clean the touchscreen.

WEEKLY MAINTENANCE

- Verify the filter paper level.
- Clean the brew group with a commercial urn cleaner:
 - Open the machine door.
 - Add one (1) tablet of commercial urn cleaner in the brewing chamber. **Leave the filter paper in place.**
 - In Service mode, press on the "Clean Brew Group (Tabz)" button.
 - Follow the instructions on the screen.
 - Order two (2) coffee drinks, then close the door.
- Sanitize the solubles mixing bowl with a hot water cycle.
- Capture data from the software.
- Verify the overflow tray.

MONTHLY MAINTENANCE

- Proceed to the deep cleaning procedure (refer to the Deep Cleaning Guide provided).

PREVENTIVE MAINTENANCE SCHEDULE AT DIFFERENT CYCLES

5,000 cycles

Clean the brew group with a commercial urn cleaner.

10,000 cycles

Check & replace the outlet valves.
Check & replace the water filter.

25,000 cycles

Replace the brew group via Cafection's Brew Group Exchange Program.
Replace the whipping motor(s).

50,000 cycles

Delime the water tank & outlet valves.

100,000 cycles

Replace the grinder burrs.
Replace the water tank float, the heater switch & the water level switch.

PERFORMED BY THE SERVICE PROVIDER