

G 100

GAGGIA
MILANO

INSTALLATION SITE PREPARATION CHECKLIST

GENERAL MACHINE ENVIRONMENT


- The installation area is clean and clear of dust and tools. It is not located in an active construction zone.
- The counter accommodates the machine size and weight:
 - Dimensions: 12.2" (W) x 24.8" (H) x 22.5" (D)
 - Weight: 63.9 lb
- For under counter waste bin installation, a hole has been cut in the counter in accordance with model chute kit template.
- Machine can safely be installed with minimum clearance:
 - Top: 9.9" – Necessary for filling the machine from the top, but it can also be refilled from the front.
 - Sides: 6" – Opening the door and accessing the lock.
 - Back: 1.75" – Electrical and water connections space.

ELECTRICAL REQUIREMENTS

G 100 Specifications	120 V / 60 Hz, 1400 W NEMA 5-15P Plug
-----------------------------	--

- Power outlet receptacle is NEMA 5-15R.
- Dedicated electrical circuit meets the G 100 power requirements.
- No extension cord or power strip on the circuit.

NEMA 5-15

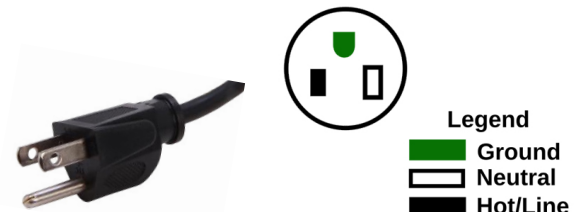

WATER REQUIREMENTS

Pressure & Hardness

- Pressure is between 7.25 psi and 143.03 psi (0.5 and 10 bar).
- pH range is between 6.5 and 7.5.
- Hardness (TDH) is between 89 PPM and 142 PPM.

MANDATORY – Machine water line must be equipped with a water filtration system with softness/filtration capabilities and a descaling device.

Water Network

- The water network provides cold, drinkable tap water.
- Dedicated 1/4" or 3/8" diameter water line.
- Easily accessible dedicated shutoff valve on machine's end.

IMPORTANT – Do NOT use distilled water

